


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents

- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	471	<b>Total Scans</b>	1017
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	472	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	1.0	<b>Rev. Number</b>	00471_00472	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	NS	<b>Data Production Date</b>	28-10-2016	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	28-10-2016	<b>Equator Crossing Time</b>	14:11:07.000	<b>No Of Outer Slices</b>	15

## Brightness Temperature(k) Footprint trace

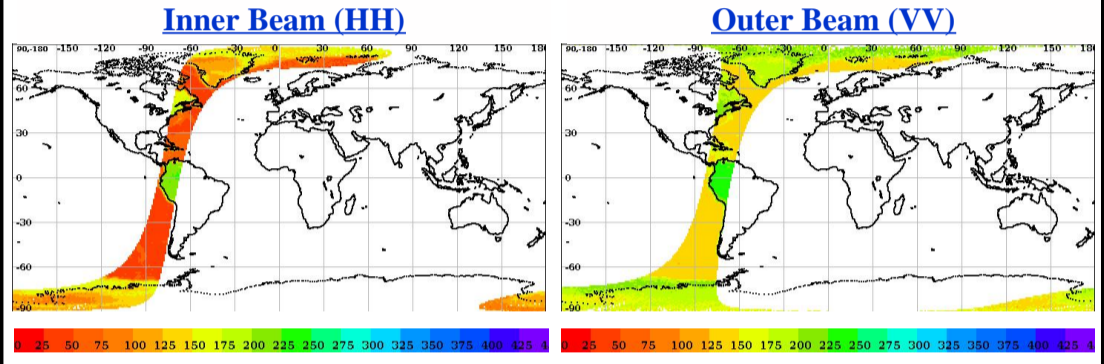


## Image Snapshot for Inner & Outer Beam

Inner (HH)

Outer (VV)



## Sigma0(dB) Footprint trace

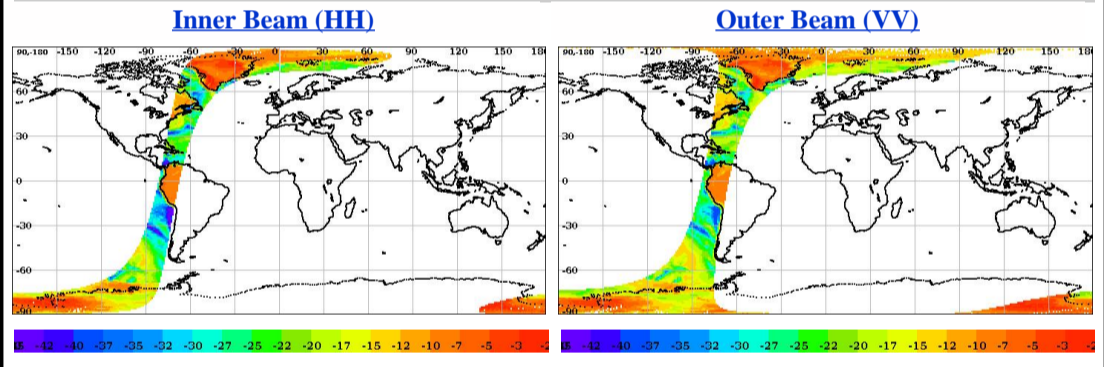


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.07	0.07
Data Not Available From Payload (%)	100.0	100.0
Slice not within sample array limits (%)	0.00	0.00
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	0.01	0.01
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	100.0	100.0


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

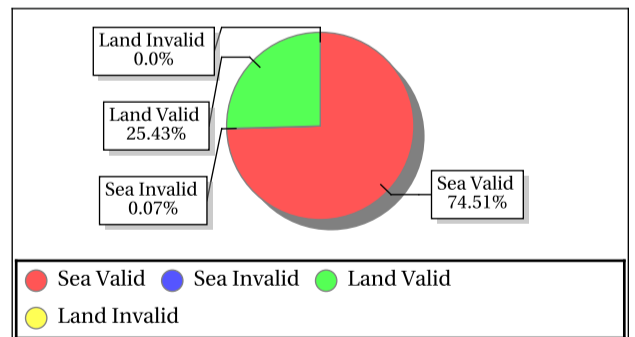

### Outer Beam (VV)

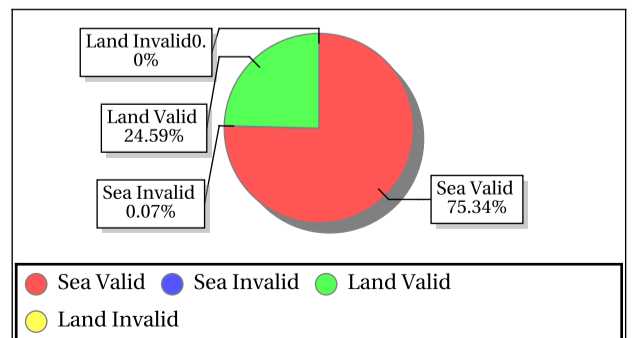

## Invariant Site Sigma-0 Statistics for Ascending/Descending, Fore/Aft in HH/VV beams

Site Name	Center Lat	Center Lon	Beam	Node	ScanDir	Sigma0 Min	Sigma0 Max	Sigma0 Mean	Sigma0 Std	BT Min	BT Max	BT Mean	BT Std
GreenLand_2	77.50	-41.50	Inner	ASC	Aft	-5.20	-4.24	-4.81	0.33	101.18	122.84	109.62	7.62
GreenLand_2	77.50	-41.50	Inner	ASC	Fore	-4.64	-3.04	-4.19	0.58	88.11	125.94	105.02	12.58
GreenLand_3	71.55	-42.45	Inner	ASC	Aft	-11.17	-8.20	-9.82	0.86	107.75	139.65	126.59	10.44
GreenLand_3	71.55	-42.45	Inner	ASC	Fore	-10.90	-9.42	-10.08	0.51	110.96	155.18	129.73	12.05
GreenLand_1	74.69	-42.50	Inner	ASC	Aft	-10.81	-6.72	-8.91	1.05	88.18	133.90	109.09	12.99
GreenLand_1	74.69	-42.50	Inner	ASC	Fore	-7.98	-6.50	-7.51	0.38	96.72	127.23	114.73	8.64
GreenLand_2	77.50	-41.50	Outer	ASC	Aft	-5.47	-5.10	-5.26	0.16	173.58	176.87	174.87	1.43
GreenLand_2	77.50	-41.50	Outer	ASC	Fore	-5.15	-4.45	-4.84	0.29	148.78	226.93	187.99	31.91
GreenLand_3	71.55	-42.45	Outer	ASC	Aft	-11.75	-9.15	-10.72	0.81	164.51	210.27	189.49	13.40
GreenLand_3	71.55	-42.45	Outer	ASC	Fore	-10.90	-9.08	-10.04	0.56	161.62	227.93	187.97	19.36
GreenLand_1	74.69	-42.50	Outer	ASC	Aft	-9.35	-7.43	-8.39	0.60	147.29	208.26	181.76	19.57
GreenLand_1	74.69	-42.50	Outer	ASC	Fore	-8.65	-6.69	-7.85	0.62	176.74	239.85	200.13	19.77
Amazon_1	0.00	-67.00	Outer	ASC	Aft	-10.63	-7.98	-8.97	0.51	211.85	271.80	237.82	13.38
Amazon_1	0.00	-67.00	Outer	ASC	Fore	-11.04	-7.01	-8.68	0.69	207.01	299.61	240.19	16.88



## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.10	256.38	0.35	3.317	0.10	239.06	0.32	3.009	0.10	0.11	0.10	0.000	0.10	0.11	0.10	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.82	27.31	6.29	1.931	-34.52	26.50	6.52	1.307	8.23	31.26	21.30	49.783	8.70	32.41	22.37	61.479

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.08	206.40	0.24	2.173	0.08	195.30	0.24	2.131	0.08	0.12	0.08	0.000	0.08	0.17	0.08	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000
<b>SNR</b>	-34.90	20.13	4.76	0.000	-34.66	19.63	4.64	0.000	2.04	25.22	15.66	3.208	-1.66	26.24	16.45	7.396

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)

	Inner Beam (VV)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.91	49.36	49.01	0.000	57.64	58.23	57.82	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0026	1.29	1.11	0.194	0.0026	1.29	1.13	0.134	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1029.06	1092.71	1052.17	0.000	1205.64	1283.95	1234.99	14.644	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.35	-90.02	-90.16	0.000	-93.05	-91.95	-92.08	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	16.13	16.66	16.23	0.000	21.21	22.45	21.37	1.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.89	39.65	19.76	1.000	18.61	39.68	19.67	1.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



## Sigma0 Behaviour (Sigma0 Vs SNR)


**Footprint-Land**

Sigma0 Vs SNR (Land)

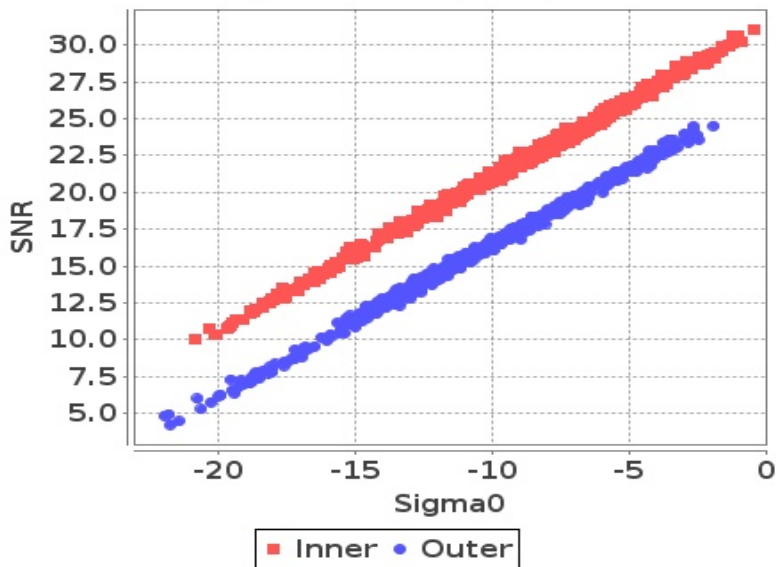


**Footprint-Sea**

Sigma0 Vs SNR (Sea)

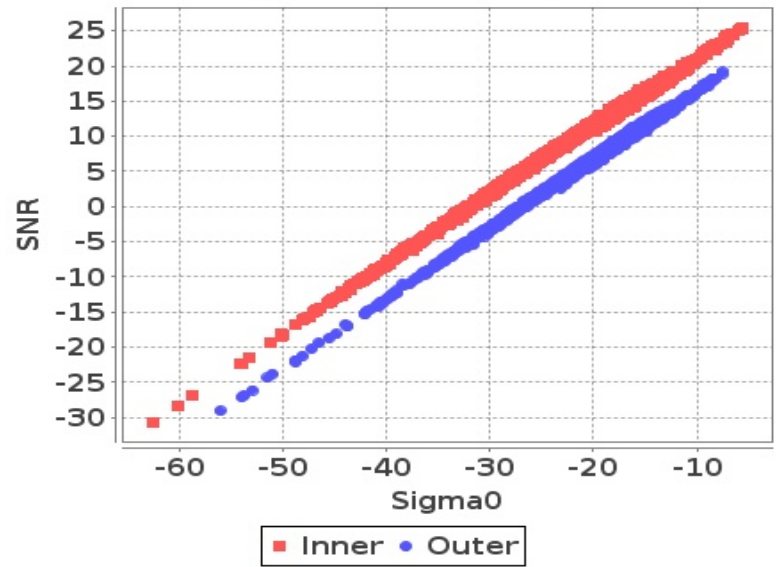


**Slice-Land**

Sigma0 Vs SNRatSlice (Land)

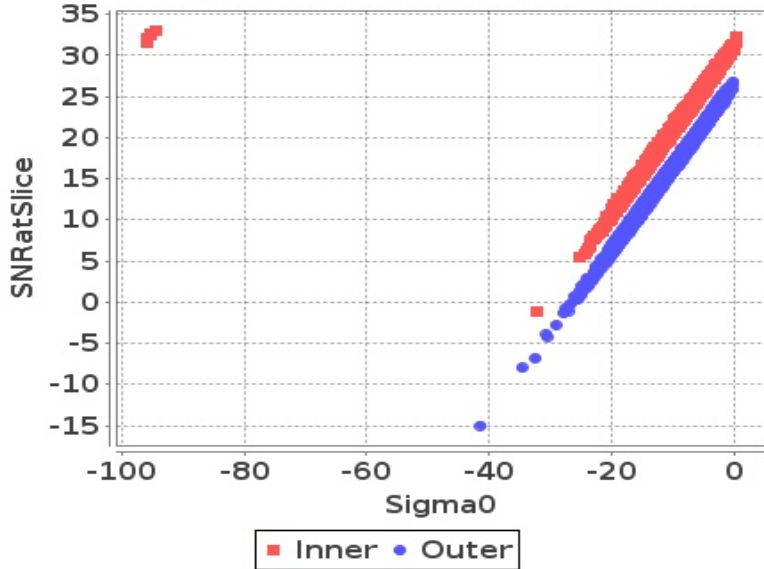

**Slice-Sea**


Sigma0 Vs SNRatSlice (Sea)

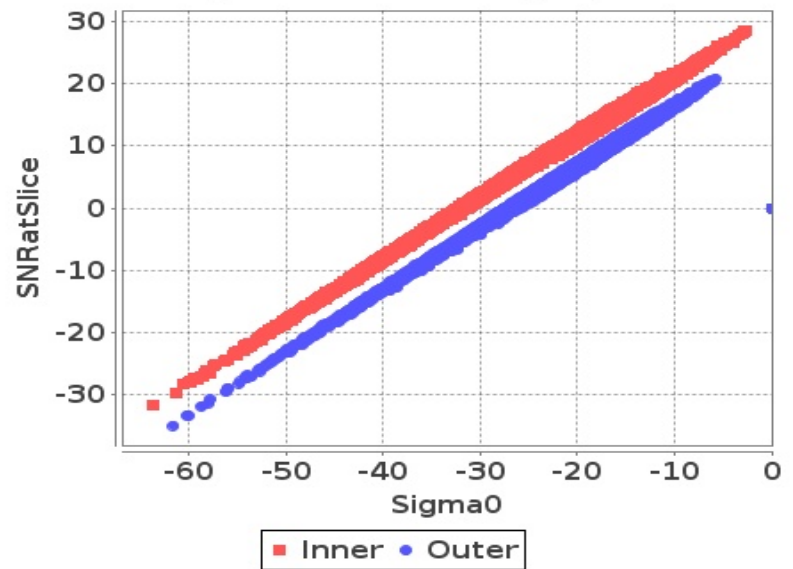

## Sigma0 Behaviour (Kp Vs SNR)


**Slice**

Kp Vs SNRatSlice (Land)

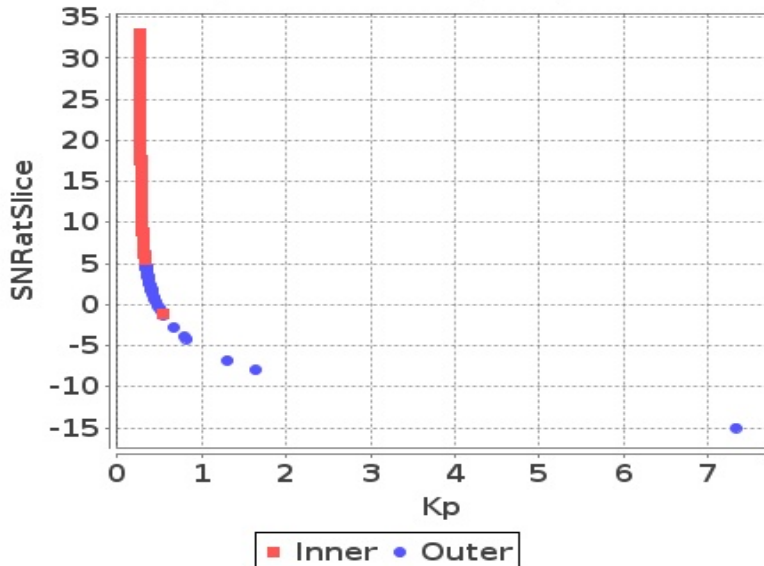


**Slice**

Kp Vs SNRatSlice (Sea)

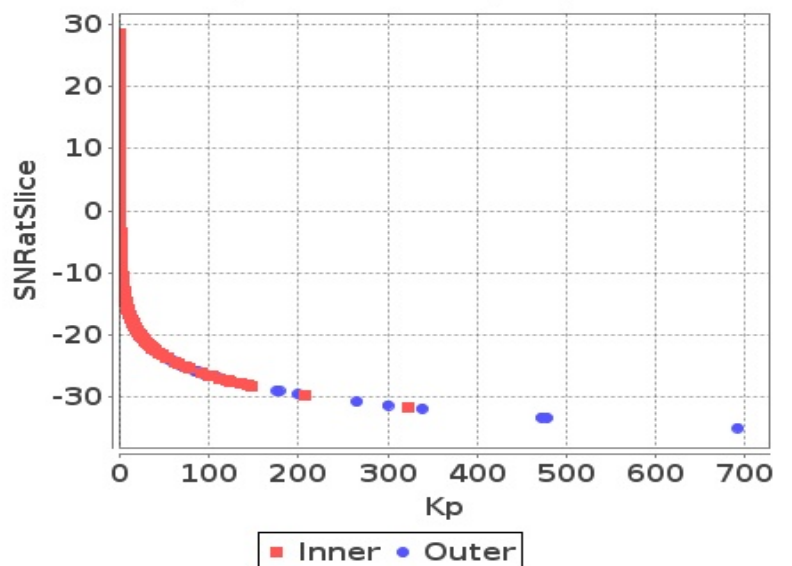


# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

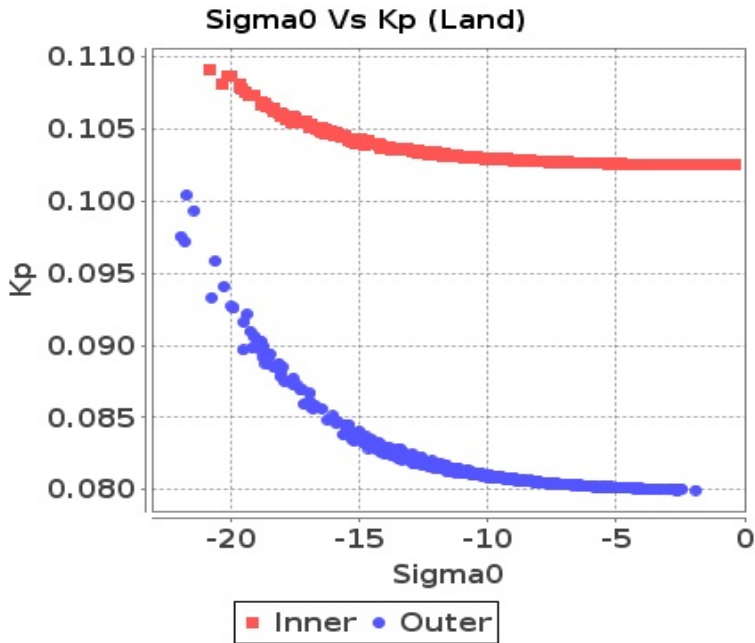


## Footprint-Sea

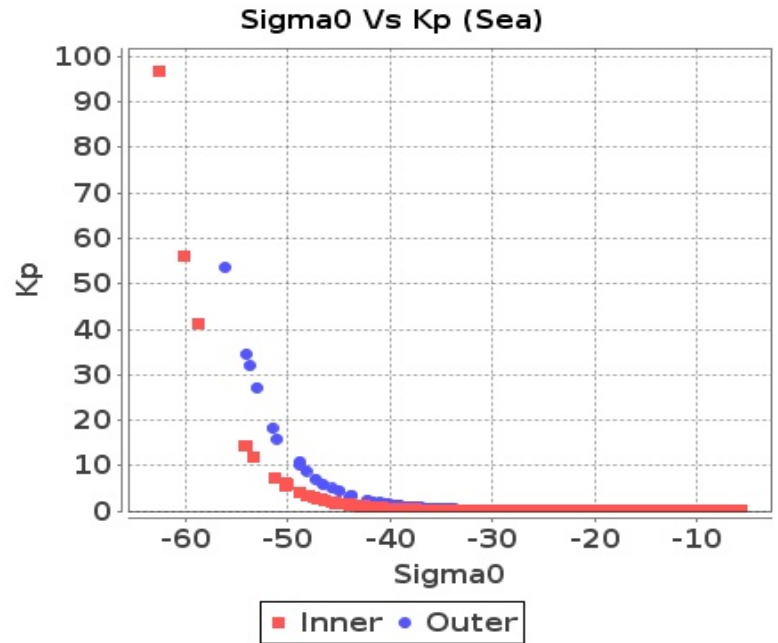

## Slice-Land

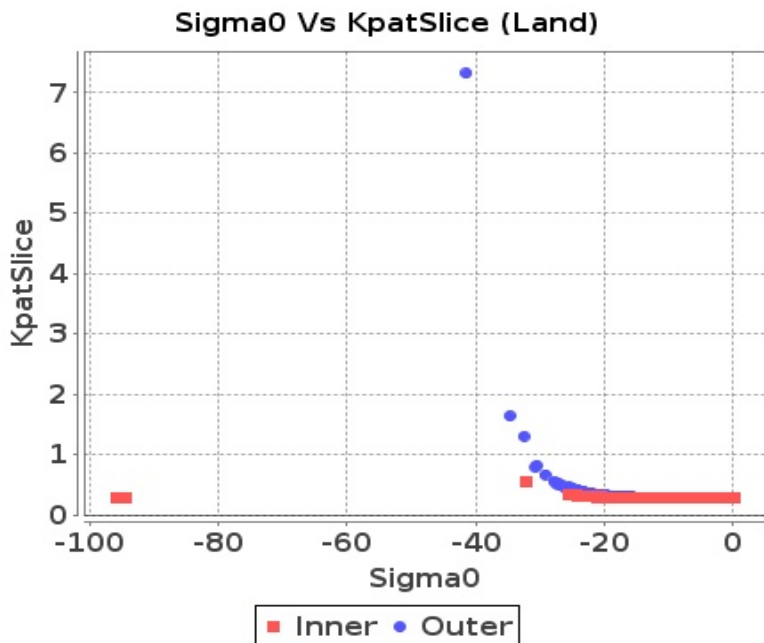

## Slice-Sea

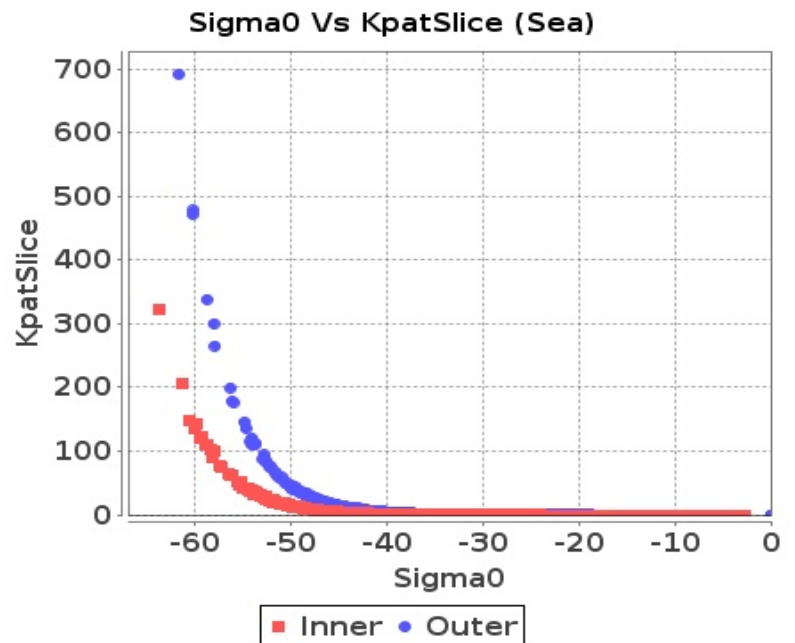







# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-22	-95	-66	-66
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-24	-28	-61	-61
Max	0	0	0	0

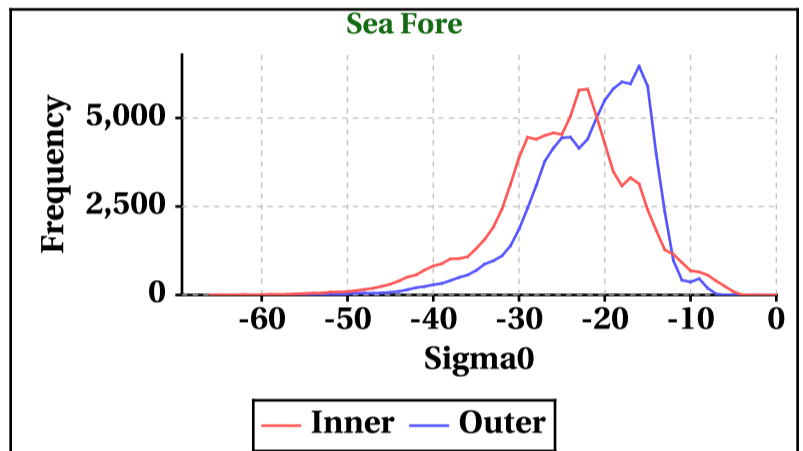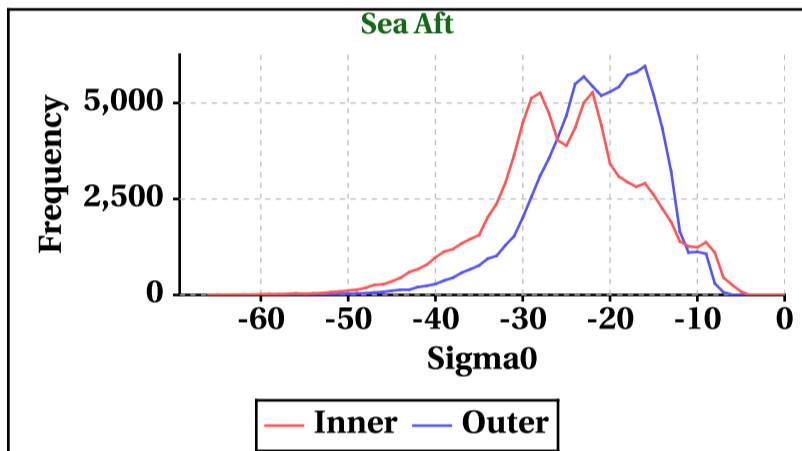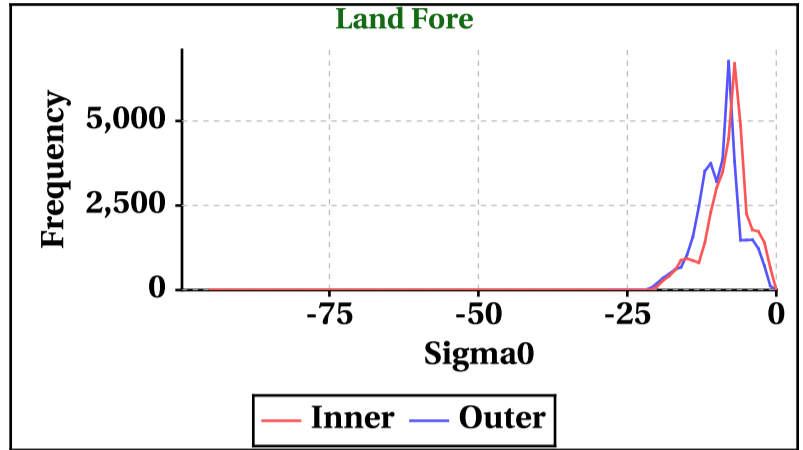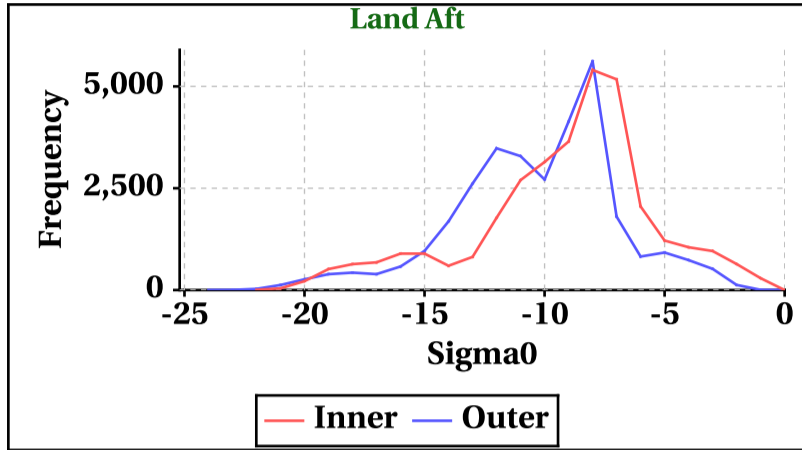

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	294	284	654	655

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	303	299	261	259

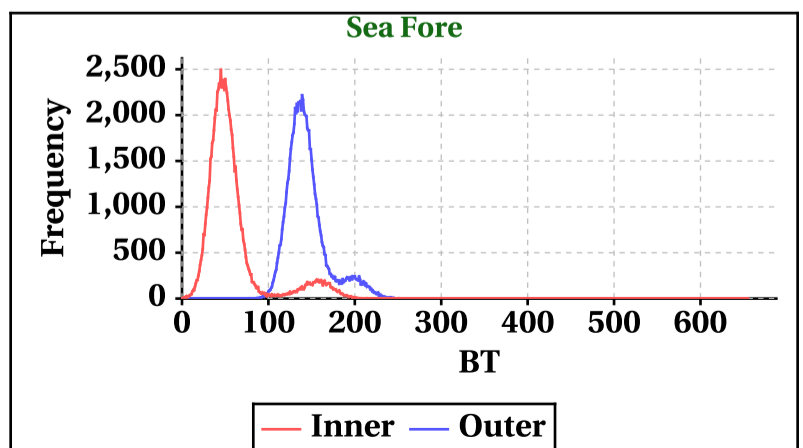
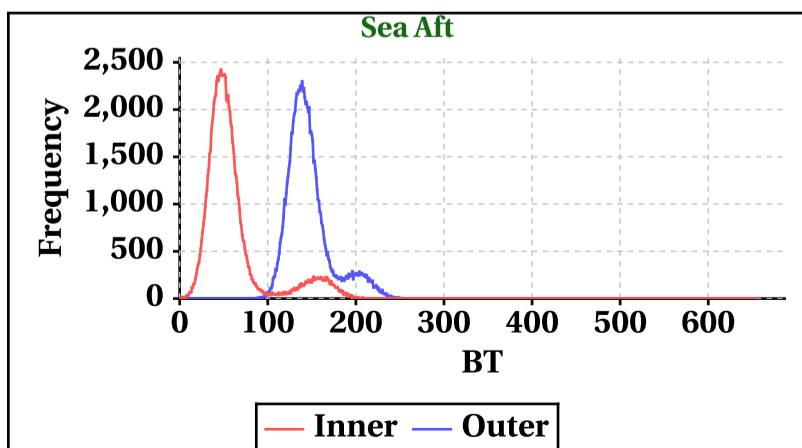
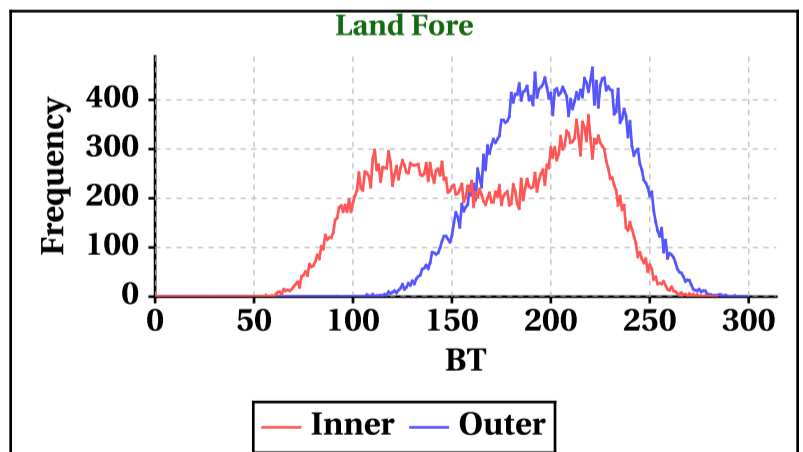
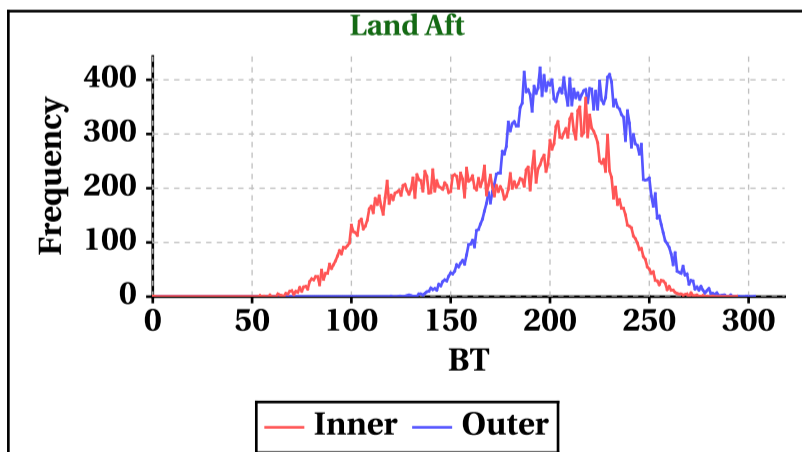


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	-34	-34
Max	31	32	27	26

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	-1	-34	-34
Max	25	26	20	19

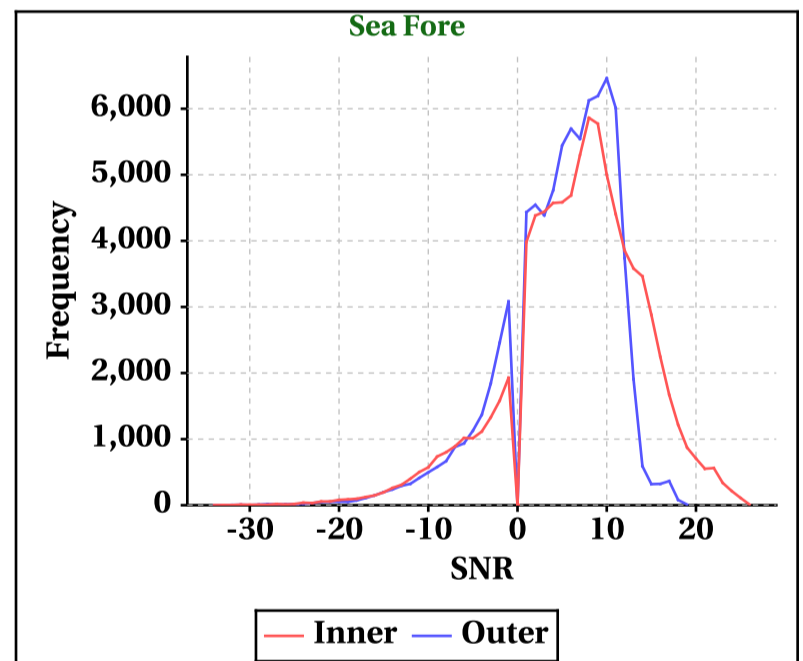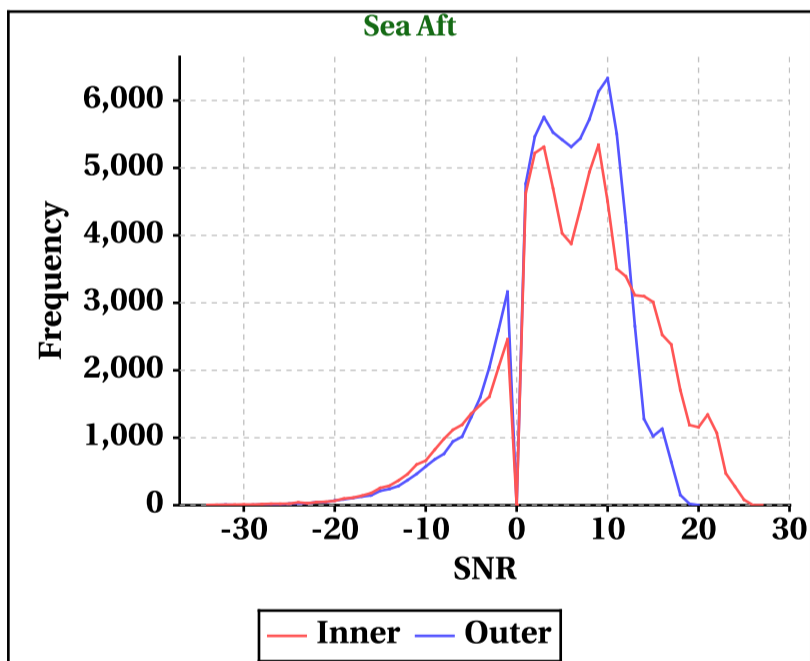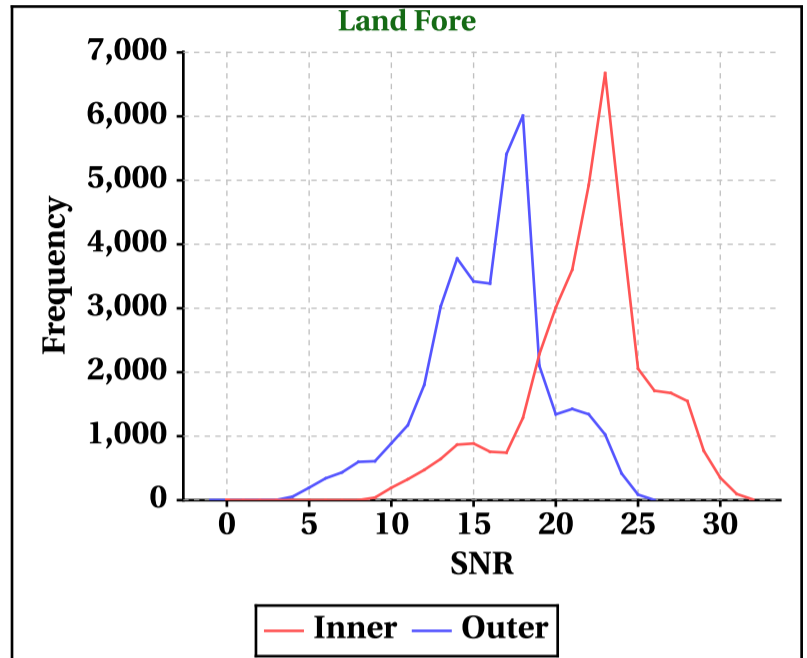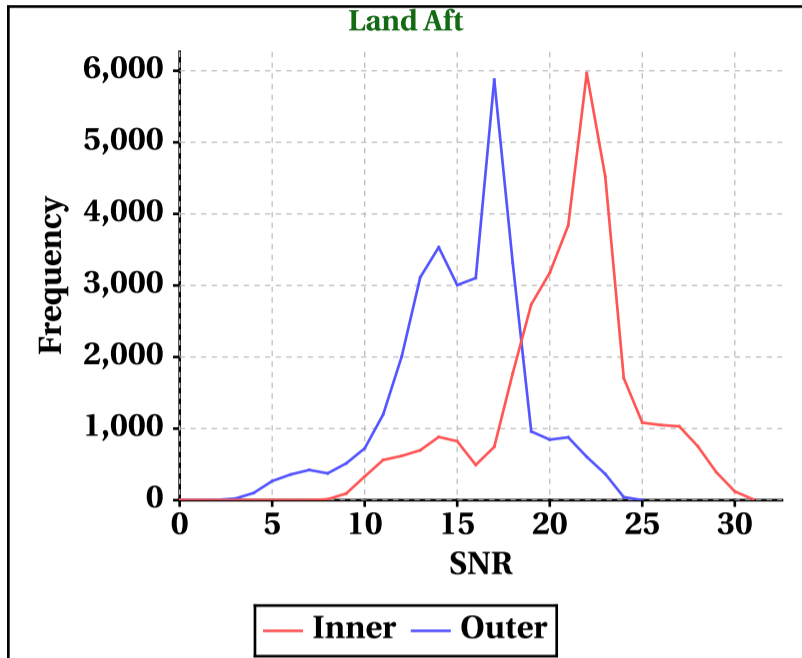


## Orbit-wise behaviour of SNR

Inner Beam (HH)

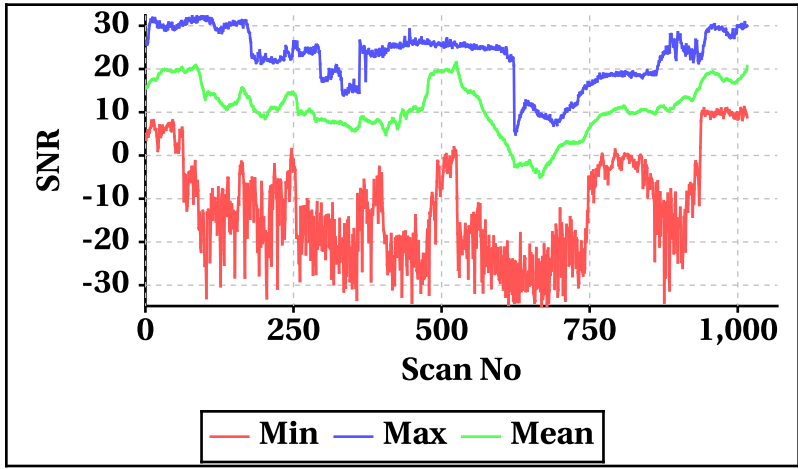


Outer Beam(VV)

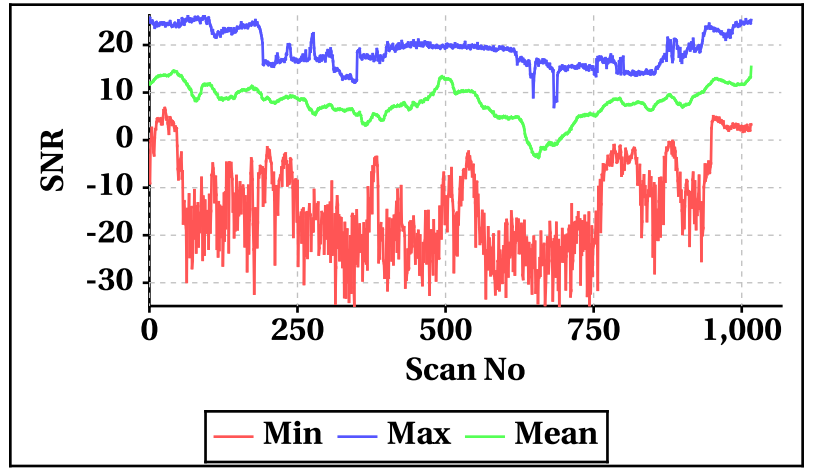


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

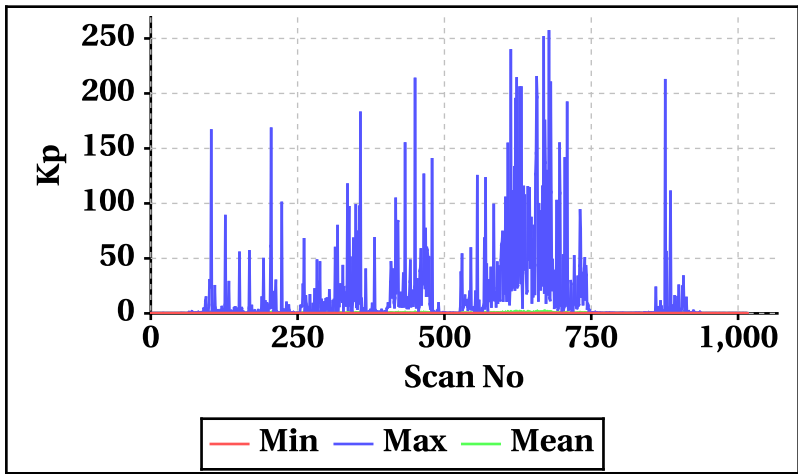


Outer Beam(VV)

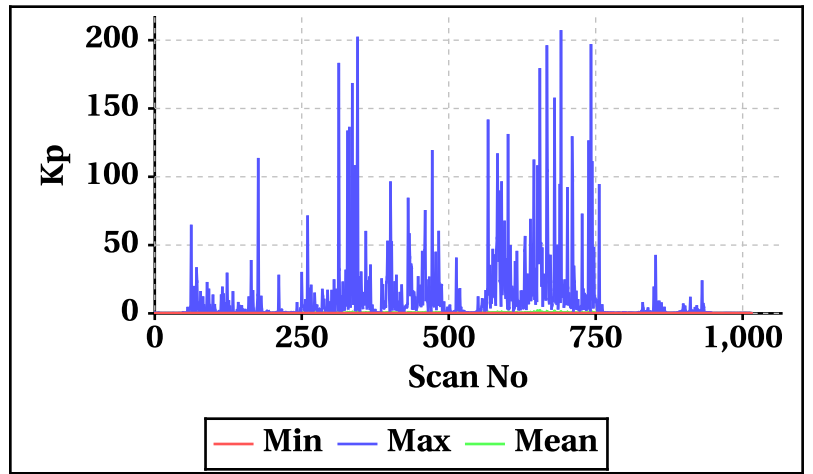


Inner Beam(HH)

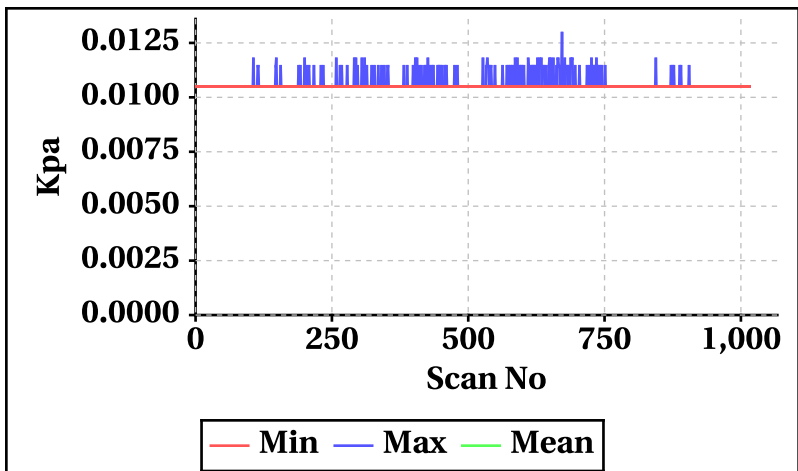


Outer Beam(VV)

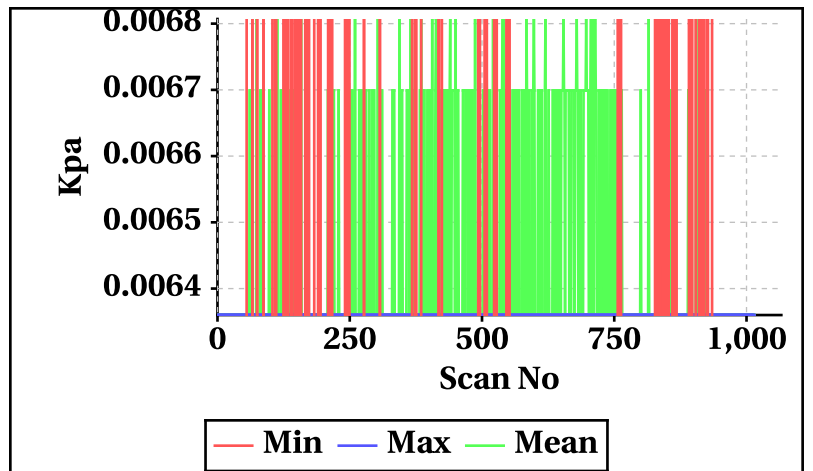


Inner Beam(HH)

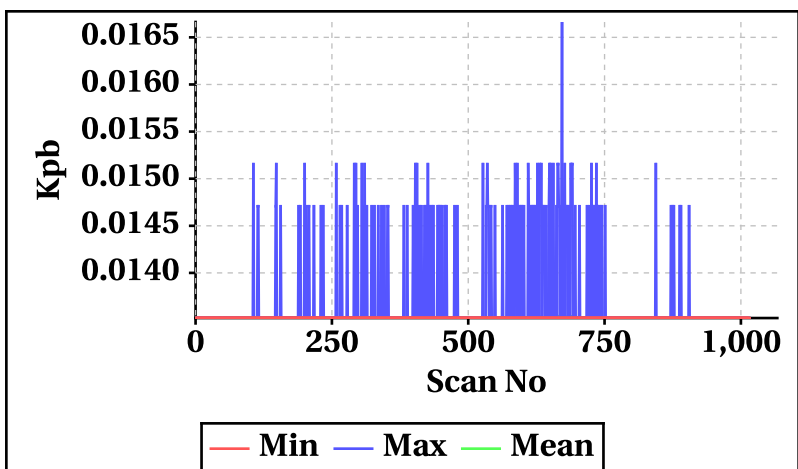


Outer Beam(VV)

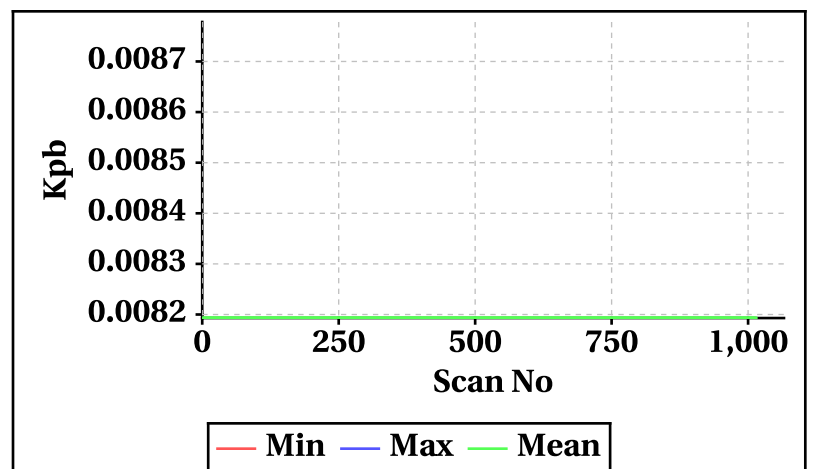

Inner Beam(HH)

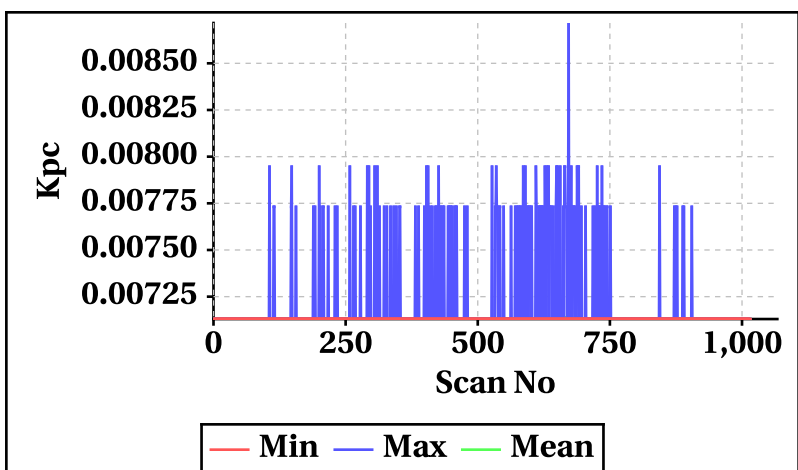


Outer Beam(VV)

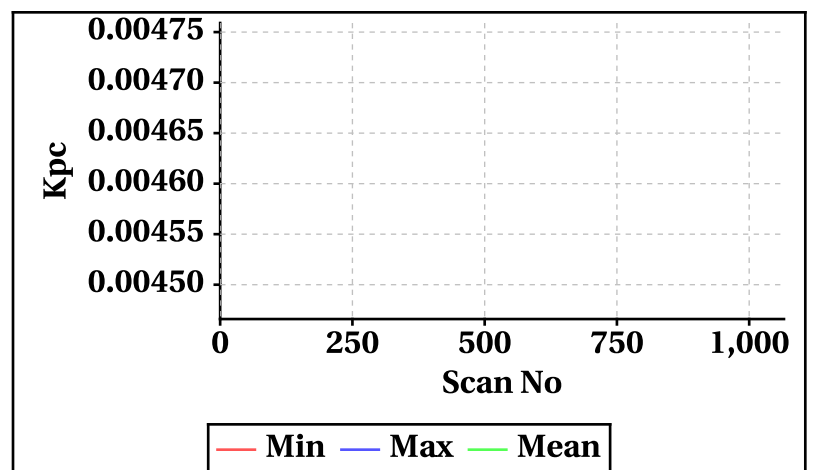




Orbt-wise behaviour of Incidence,Azimuth,Range,X-Factor


Inner Beam (HH)

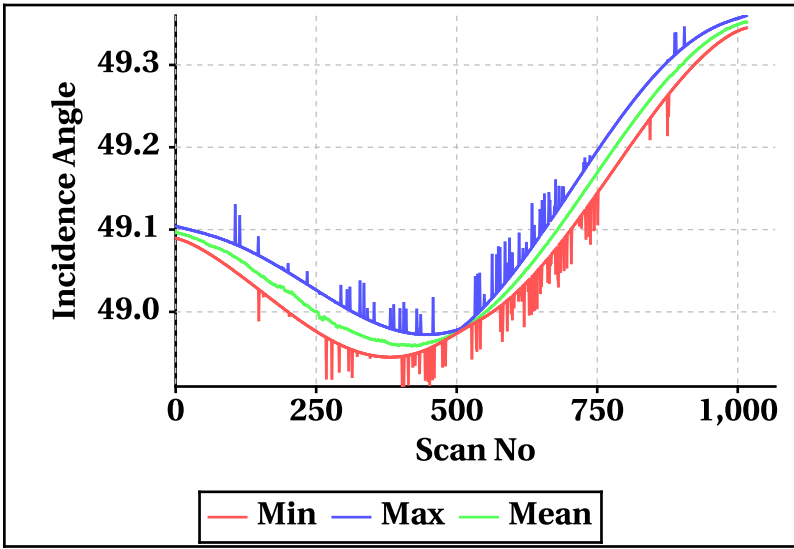


Outer Beam(VV)

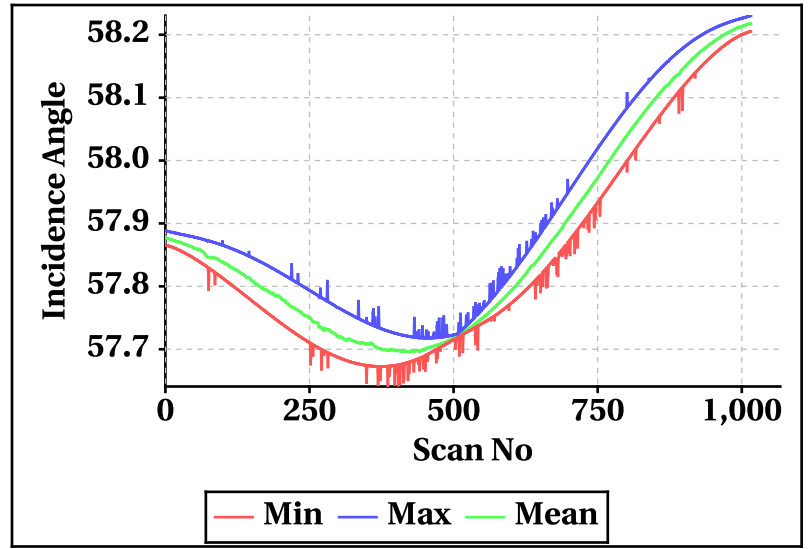


Inner Beam (HH)

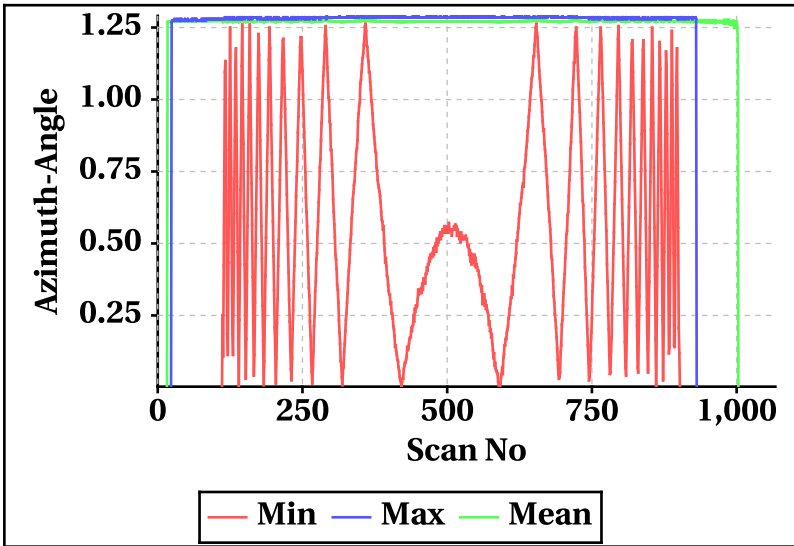


Outer Beam(VV)

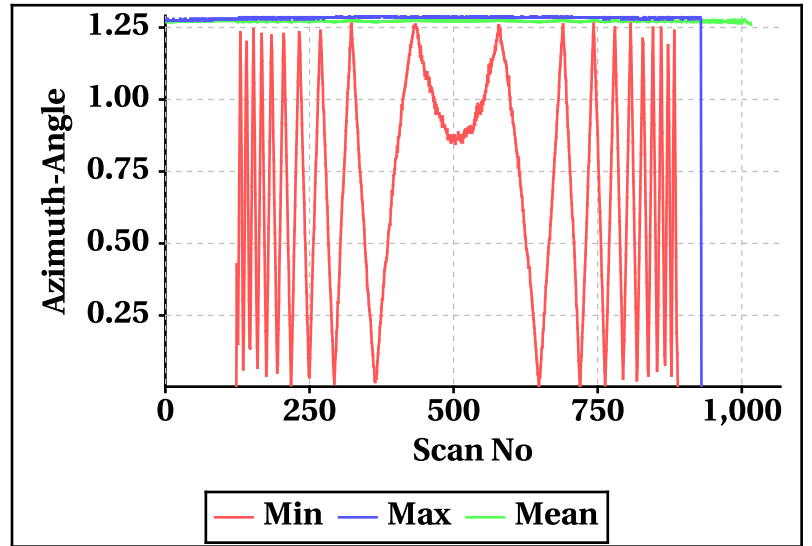


Inner Beam (HH)

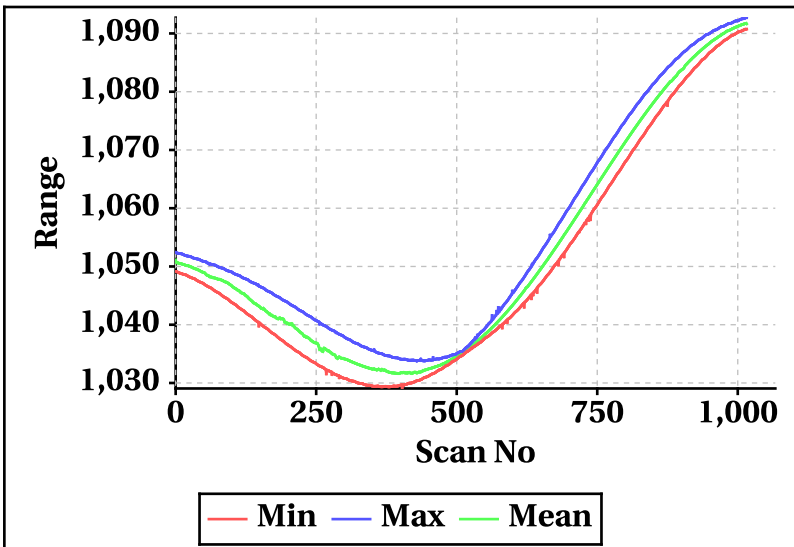


Outer Beam(VV)

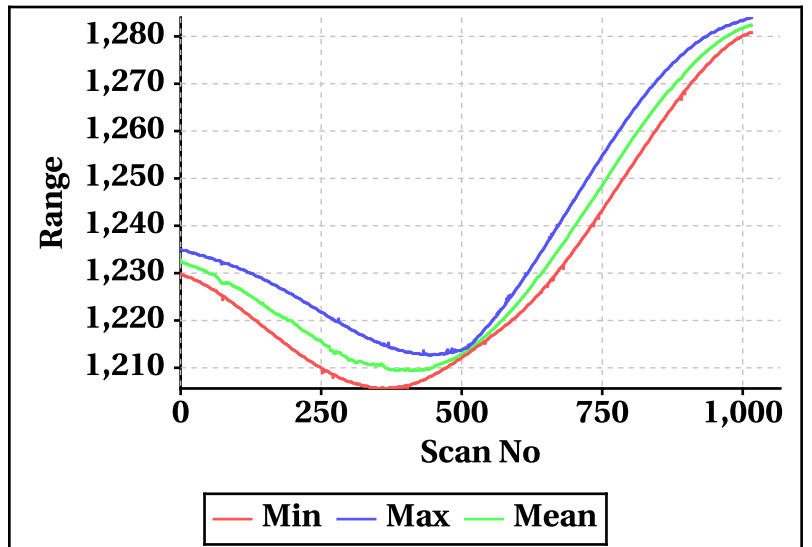

Inner Beam (HH)

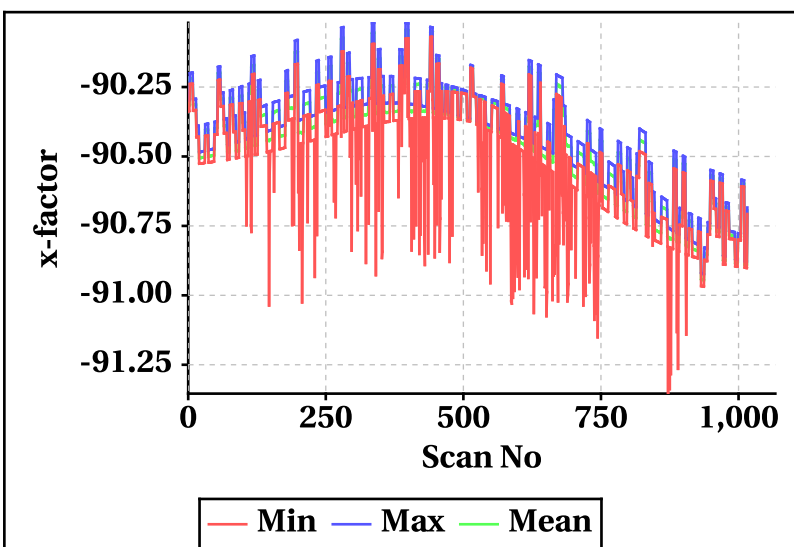

Outer Beam(VV)

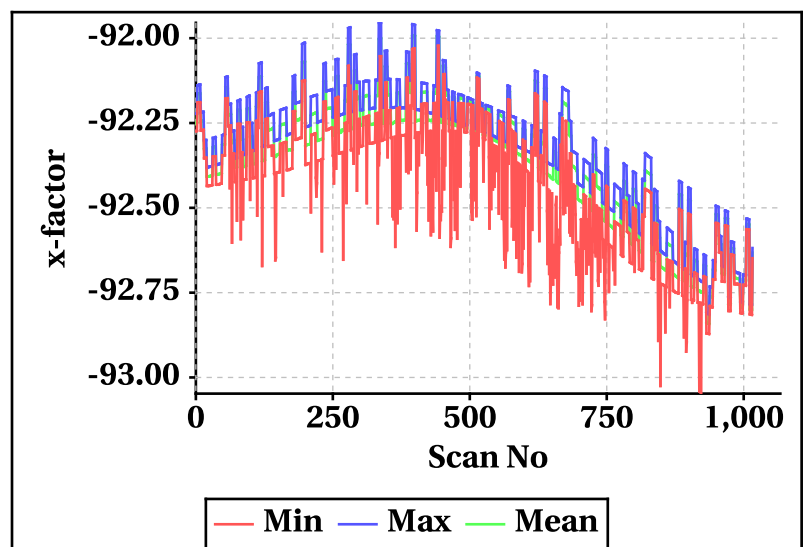


# Doppler Frequency Variation

**Doppler Frequency(KHz) variation statistics Over the half Orbit**

	Inner Beam (HH)	Outer Beam (VV)
<b>Min</b>	-472.38	-528.24
<b>Max</b>	470.48	526.60


**Footprint wise Doppler frequency variation Inner Beam (HH)**

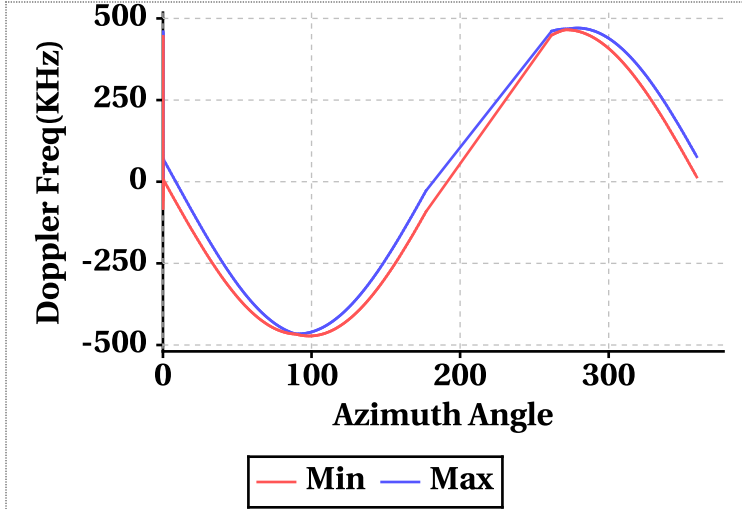


**Doppler Frequency(KHz) variation**

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	-54.68	9.36	-31.48	-148.86	5.26	-40.35
Doppler_70	464.64	467.64	465.49	519.42	522.98	520.38
Doppler_140	14.22	76.58	54.01	9.54	79.46	54.10
Doppler_210	-466.36	-148.86	-464.84	-522.14	-172.56	-520.74
Doppler_280	-148.86	-17.34	-58.27	-172.56	-13.00	-58.60


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)**

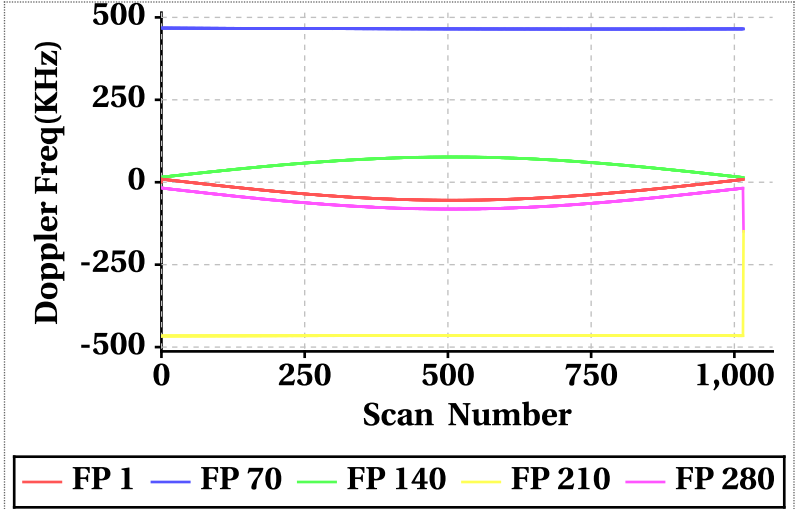

**Footprint wise Doppler frequency variation Outer Beam (VV)**

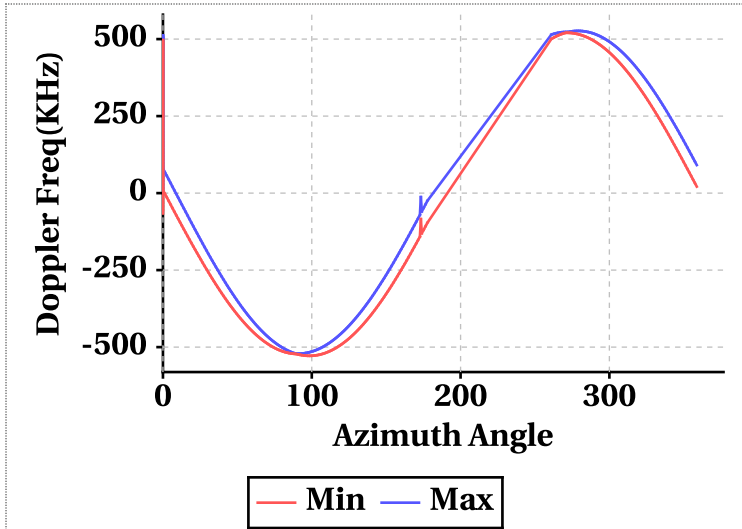


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)**

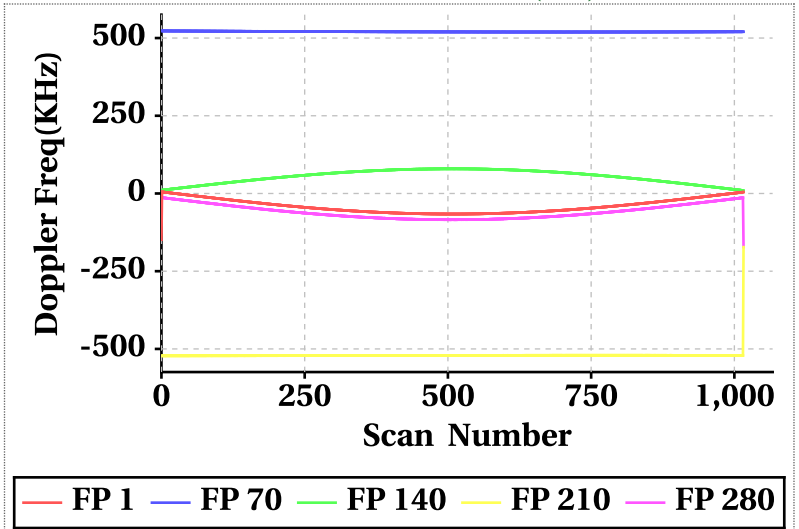


# Latitude Vs Doppler Frequency

**Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]**

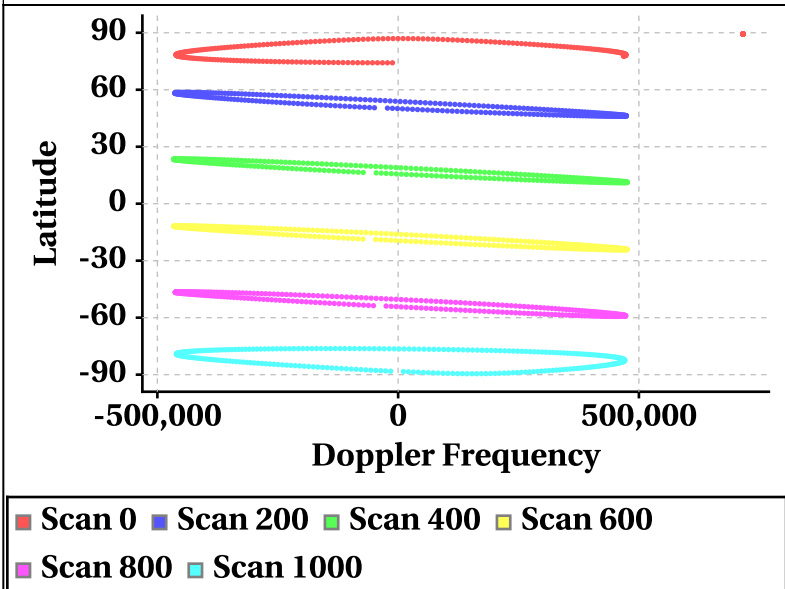


**Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]**

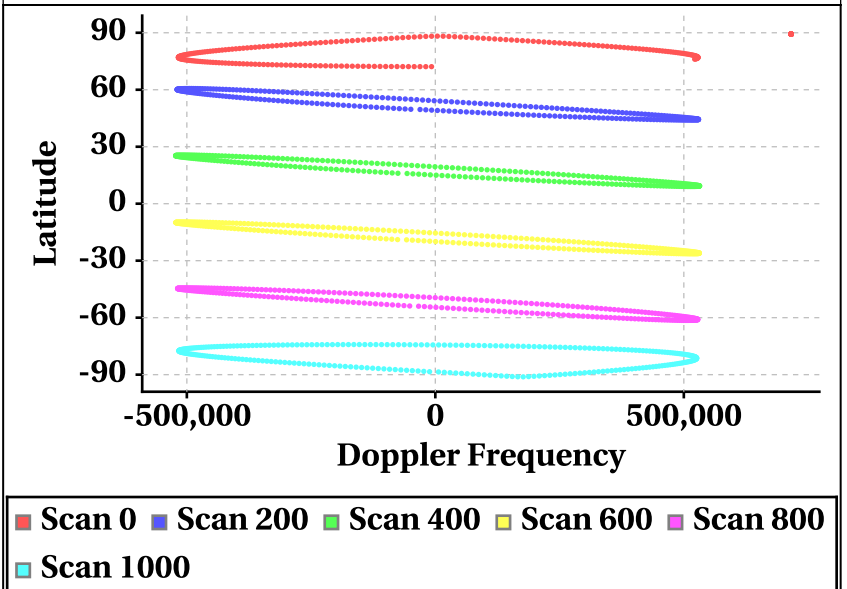

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

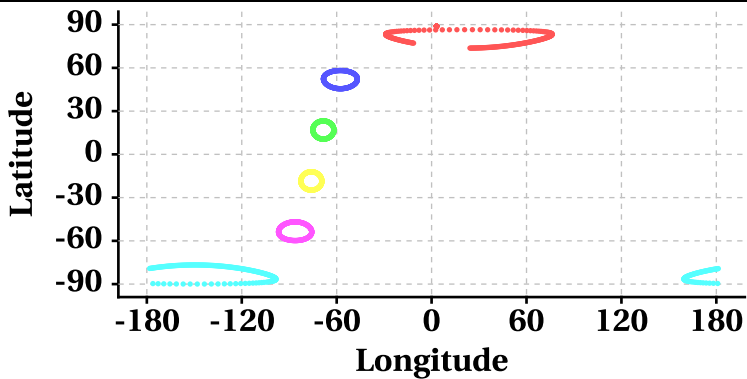

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Scan Trace [Outer Beam (VV)]

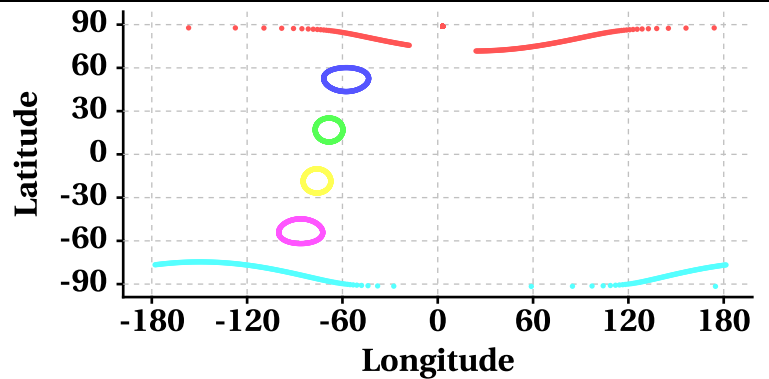

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

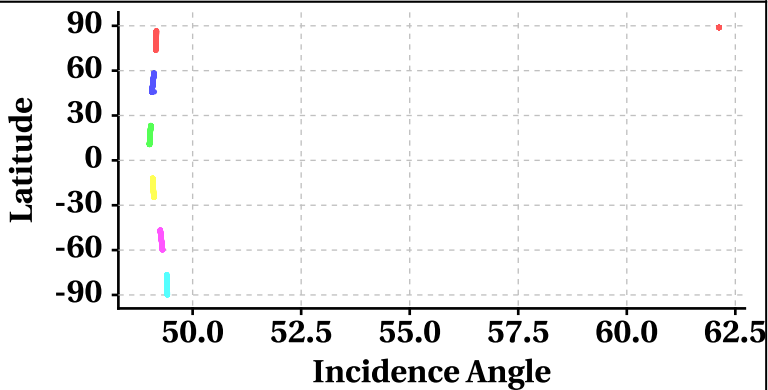

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

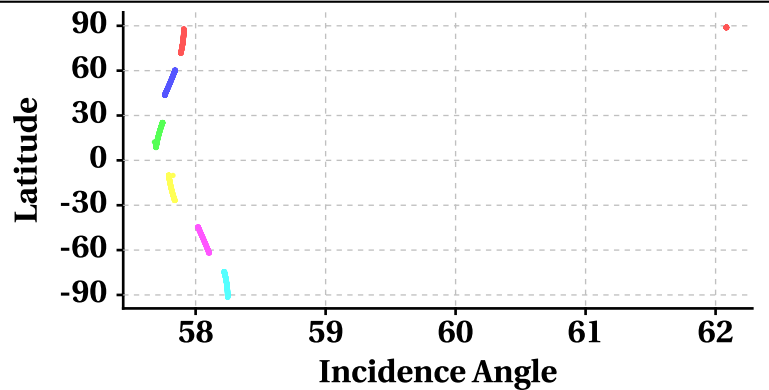

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

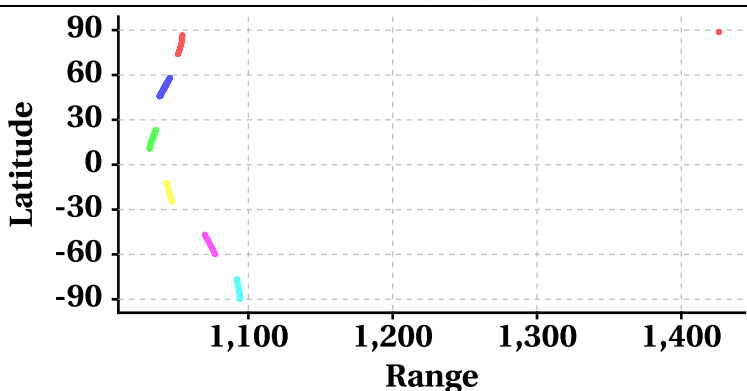

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

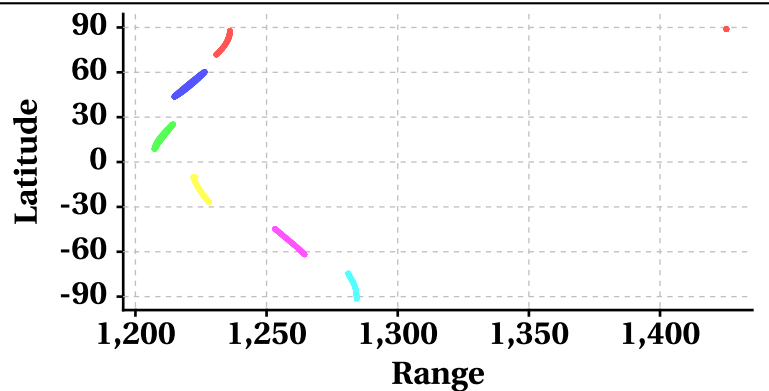

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000



# Variation in Orbit and Attitude Parameters

