


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents


- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	12974	<b>Total Scans</b>	951
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	12975	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	v1.1.3	<b>Rev. Number</b>	12974_12975	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	SN	<b>Data Production Date</b>	10-03-2019	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	10-03-2019	<b>Equator Crossing Time</b>	00:47:02.000	<b>No Of Outer Slices</b>	15


## Brightness Temperature(k) Footprint trace

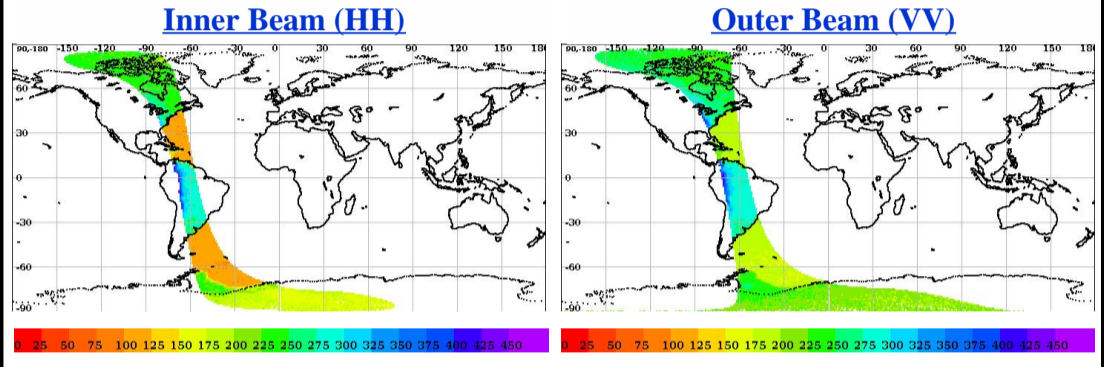

## Image Snapshot for Inner & Outer Beam

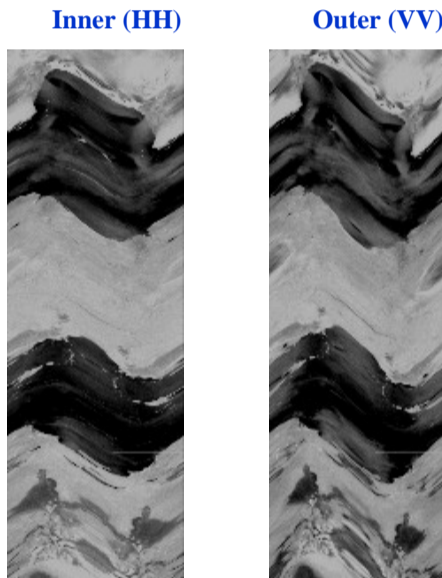

## Sigma0(dB) Footprint trace

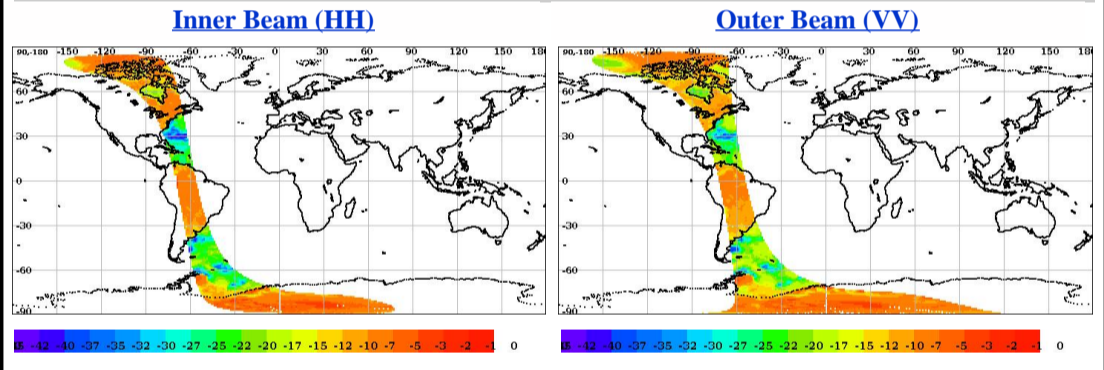


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
<b>Invalid Sigma0(%)</b>	0.30	1.26
<b>Data Not Available From Payload (%)</b>	31.98032	7.721132
<b>Slice not within sample array limits (%)</b>	68.02	92.28
<b>C(S+N) - C(N) &lt; 0.1 (%)</b>	0.00	0.00
<b>Poor Sigma0(%)</b>	22.50	13.39
<b>Noise samples for blending Saturated</b>	1.452385	0.394285
<b>Count samp. for interpol. saturated (%)</b>	0.00	0.00
<b>Sigma0 &lt; lower bound (-96dB) (%)</b>	0.0	0.0
<b>Sigma0 &gt; upper bound (0 dB) (%)</b>	0.00	0.00
<b>SNR &lt; -65 dB (%)</b>	0.016263	0.033244


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

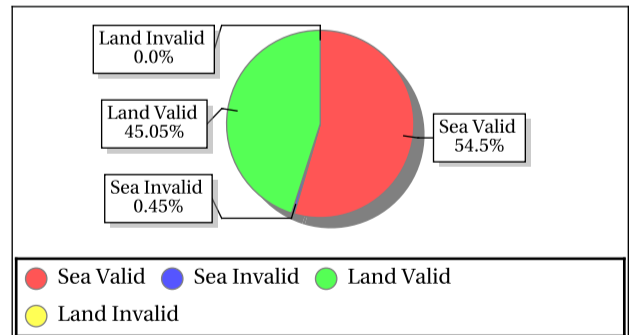

### Outer Beam (VV)

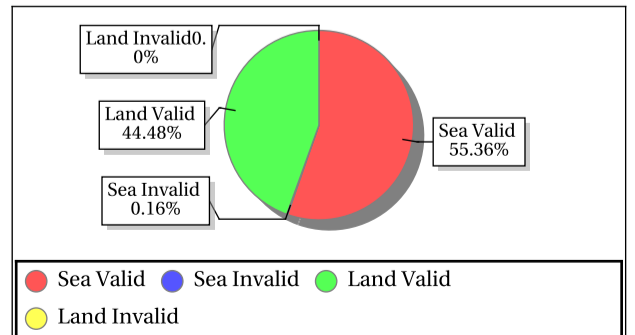

## Invariant Site Sigma-0 Statistics for Ascending/Descending, Fore/Aft in HH/VV beams

Site Name	Center Lat	Center Lon	Beam	Node	ScanDir	Sigma0 Min	Sigma0 Max	Sigma0 Mean	Sigma0 Std	BT Min	BT Max	BT Mean	BT Std
Amazon_3	-6.00	-61.00	Inner	ASC	Aft	-9.52	-7.20	-8.32	0.52	262.30	332.46	294.93	17.59
Amazon_3	-6.00	-61.00	Inner	ASC	Fore	-9.41	-6.82	-7.92	0.59	259.00	330.19	293.56	17.67
Amazon_2	-3.00	-61.00	Inner	ASC	Aft	-14.46	-7.77	-9.51	1.26	216.00	320.80	270.18	27.50
Amazon_2	-3.00	-61.00	Inner	ASC	Fore	-10.98	-7.90	-9.08	0.82	209.68	317.83	259.84	23.00
Amazon_1	0.00	-67.00	Inner	ASC	Aft	-9.22	-6.99	-8.27	0.58	366.20	557.73	428.47	39.02
Amazon_1	0.00	-67.00	Inner	ASC	Fore	-9.42	-6.73	-8.18	0.69	298.03	381.82	342.17	19.81
Amazon_3	-6.00	-61.00	Outer	ASC	Aft	-10.75	-8.46	-9.30	0.48	247.92	316.41	284.37	16.69
Amazon_3	-6.00	-61.00	Outer	ASC	Fore	-9.58	-7.81	-8.69	0.46	268.36	321.63	295.32	14.33
Amazon_2	-3.00	-61.00	Outer	ASC	Aft	-12.39	-9.17	-10.41	0.88	233.83	303.51	279.05	17.26
Amazon_2	-3.00	-61.00	Outer	ASC	Fore	-11.71	-8.29	-10.07	0.83	257.90	320.28	284.75	15.79
Amazon_1	0.00	-67.00	Outer	ASC	Aft	-10.06	-8.14	-9.11	0.48	288.08	366.79	325.66	21.56
Amazon_1	0.00	-67.00	Outer	ASC	Fore	-10.26	-7.71	-8.79	0.55	284.16	354.05	311.98	18.10



## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.12	301.73	0.32	2.695	0.12	258.46	0.25	1.789	0.12	0.54	0.12	0.000	0.12	7.51	0.12	0.011
<b>Kpa</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000
<b>Kpb</b>	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.93	27.16	6.23	1.655	-34.26	27.73	7.49	3.996	-6.66	28.85	20.36	15.161	-18.84	30.81	20.91	27.584

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.09	220.56	0.28	2.694	0.09	222.73	0.23	1.991	0.09	0.14	0.09	0.000	0.09	66.11	0.09	0.029
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.74	21.50	3.89	0.000	-34.78	21.27	4.73	0.000	0.35	22.67	14.56	0.026	-29.50	23.22	14.83	0.016

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)

	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.66	49.35	49.02	0.000	57.41	58.16	57.83	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0000	283.73	1.28	2.322	0.0000	290.56	1.28	3.364	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1017.59	1078.40	1040.35	28.575	1191.67	1266.70	1219.47	45.439	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.67	-89.72	-90.33	0.000	-93.45	-91.77	-92.14	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	15.44	16.03	15.69	0.000	20.45	20.97	20.64	0.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.73	9519.16	289.04	35.000	18.55	9735.24	97.64	11.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



## Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

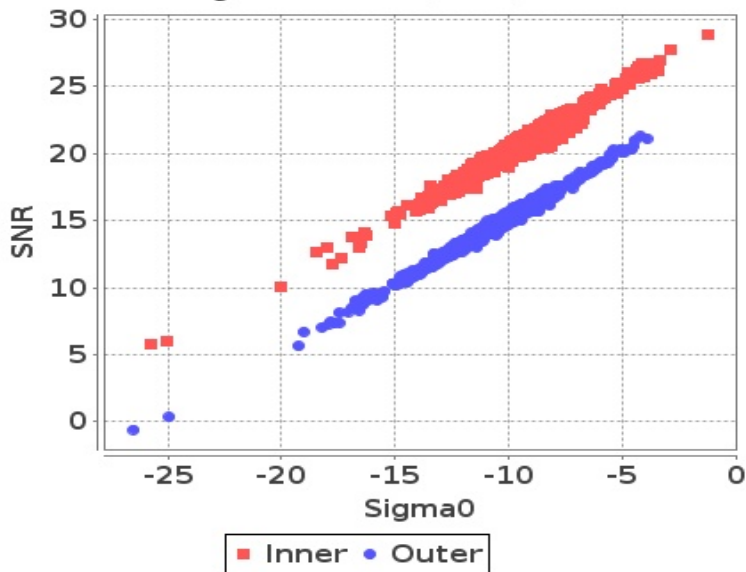


Footprint-Sea

Sigma0 Vs SNR (Sea)

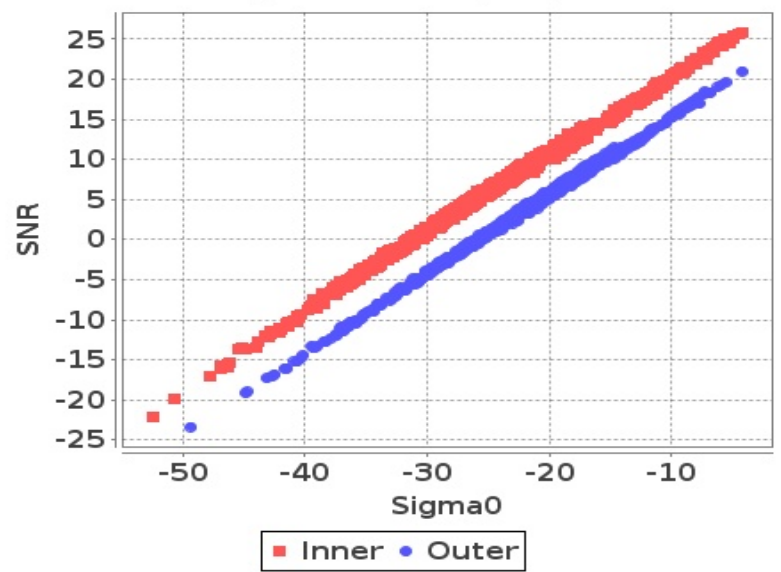


Slice-Land

Sigma0 Vs SNRatSlice (Land)

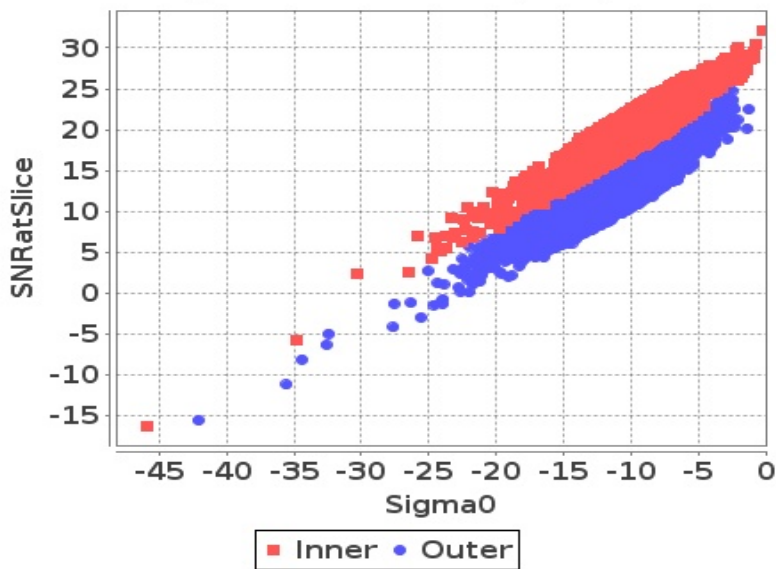

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

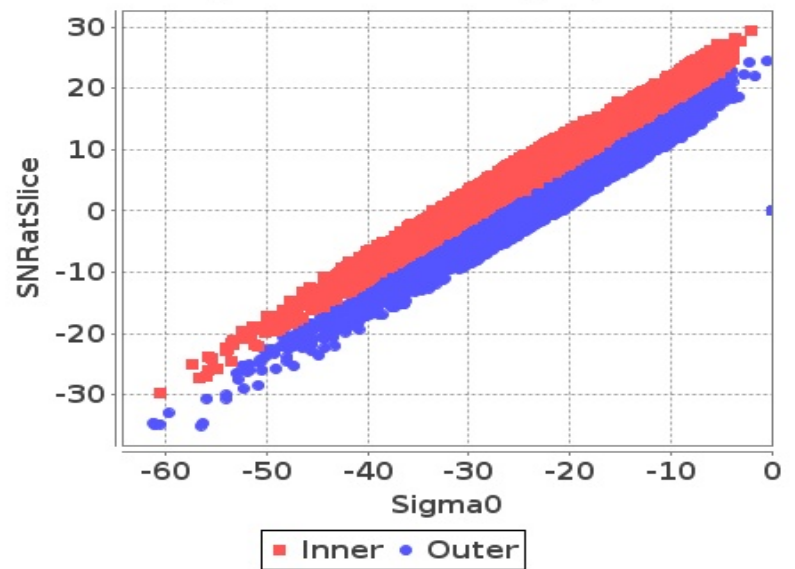

## Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

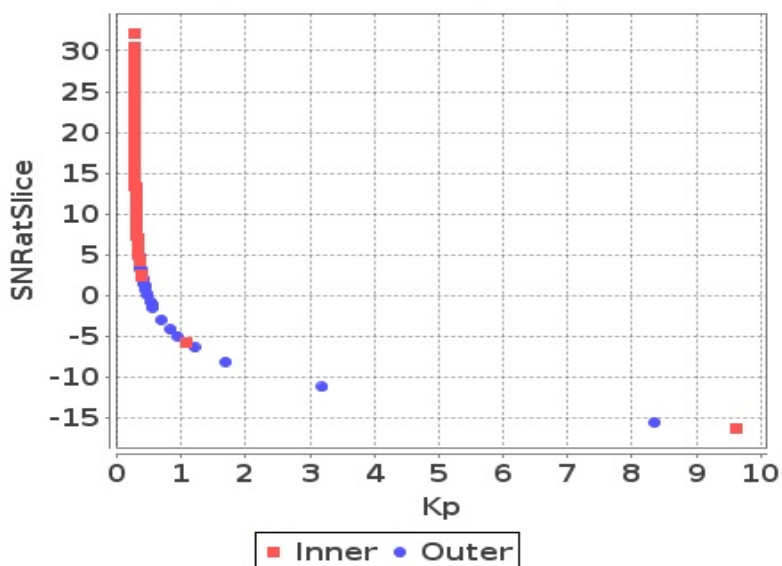


Slice

Kp Vs SNRatSlice (Sea)

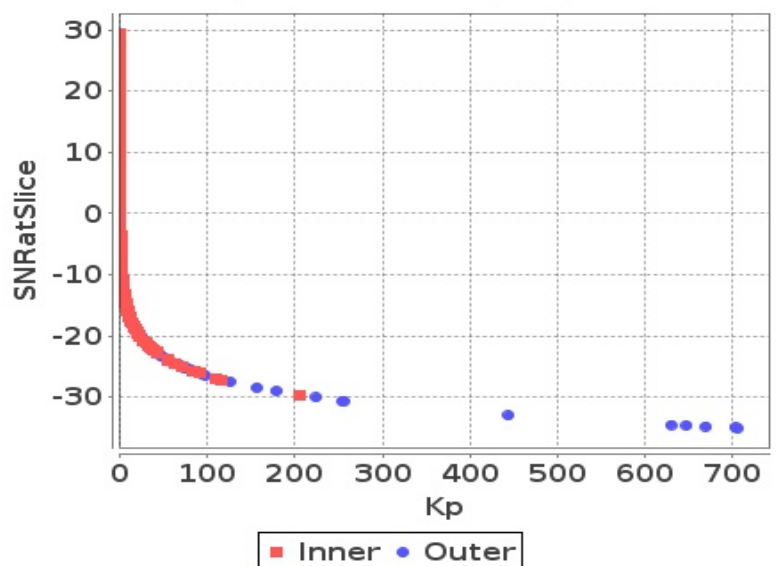


# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

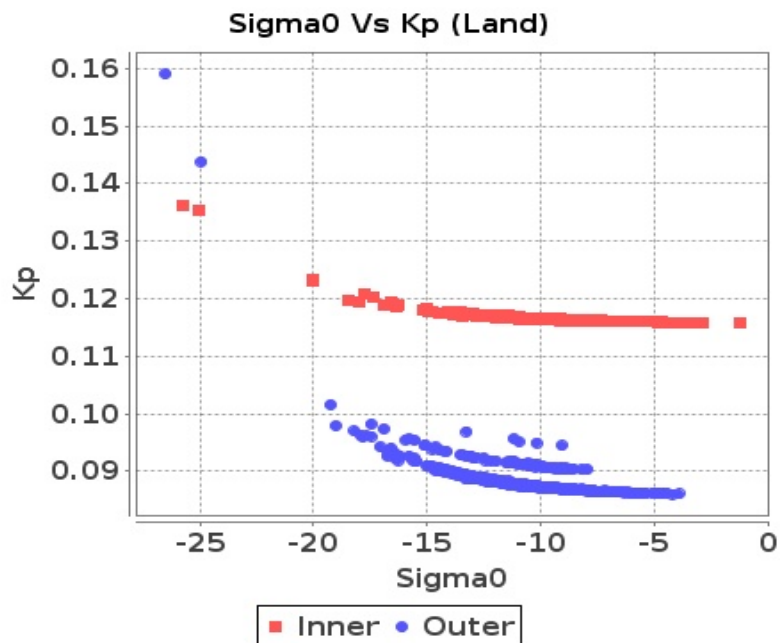


## Footprint-Sea

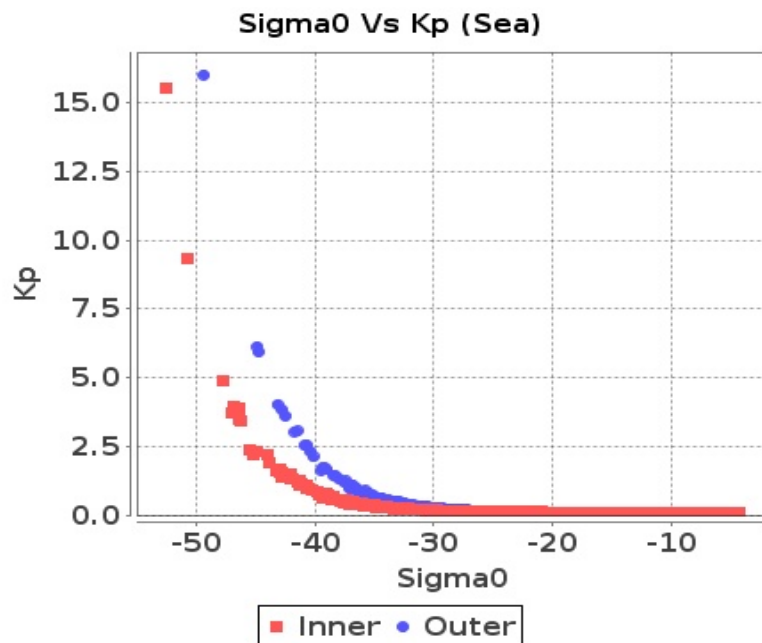

## Slice-Land

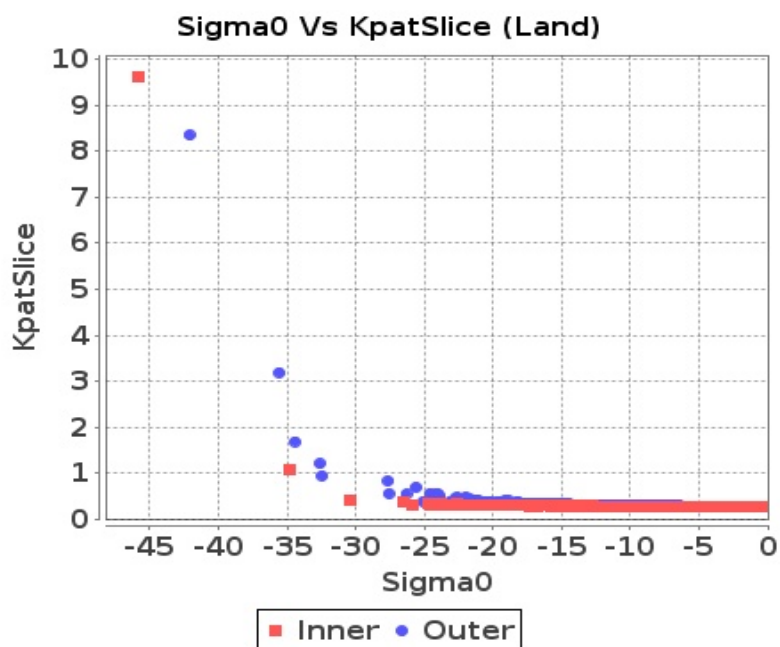

## Slice-Sea




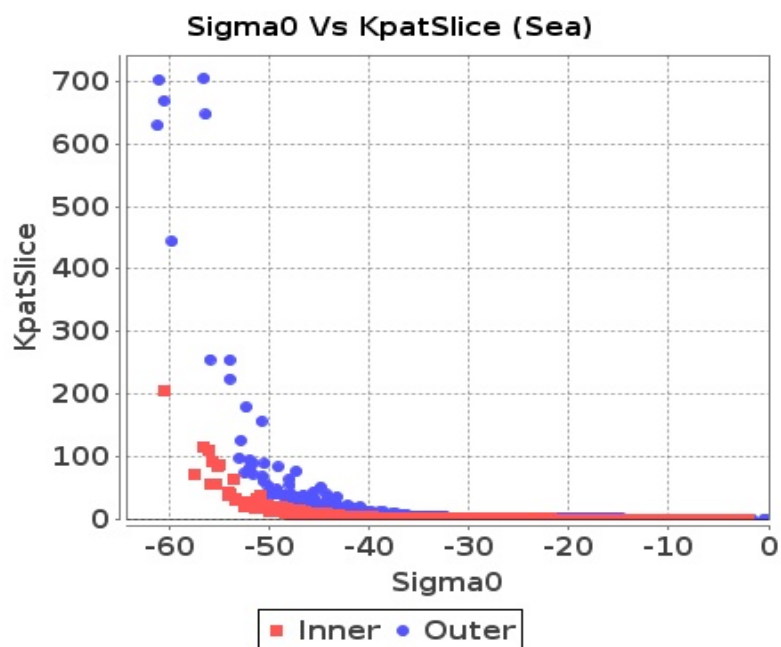


# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-37	-50	-65	-65
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-24	-55	-60	-60
Max	0	0	0	0

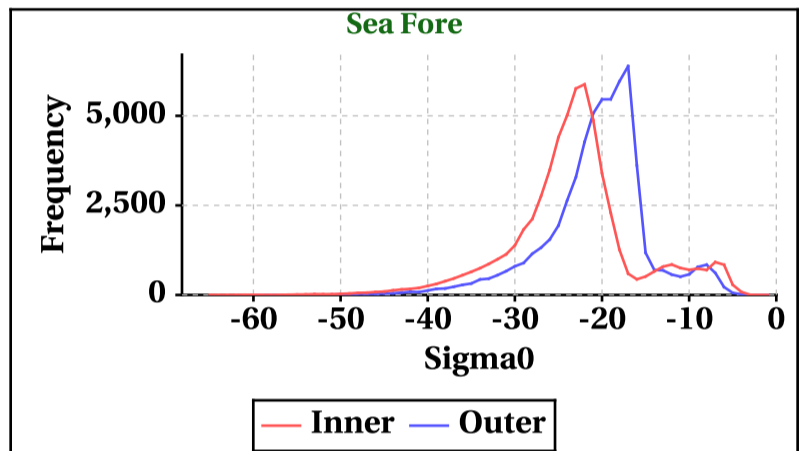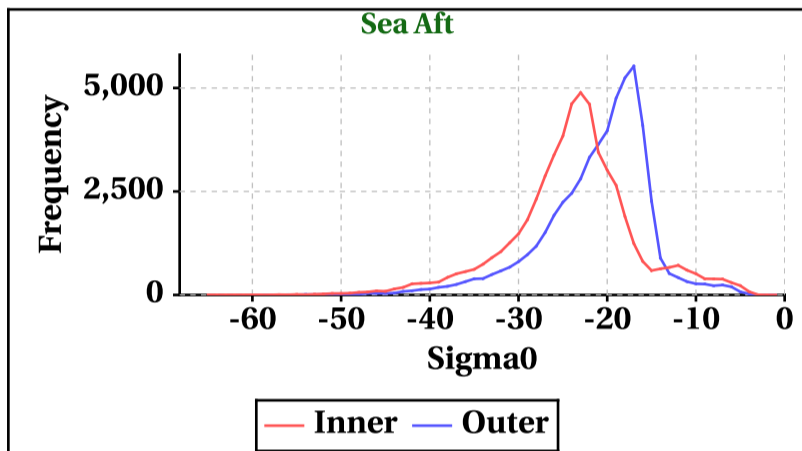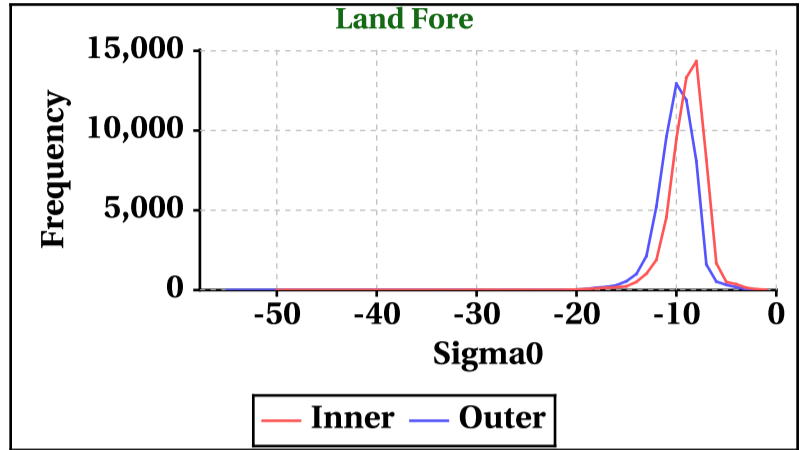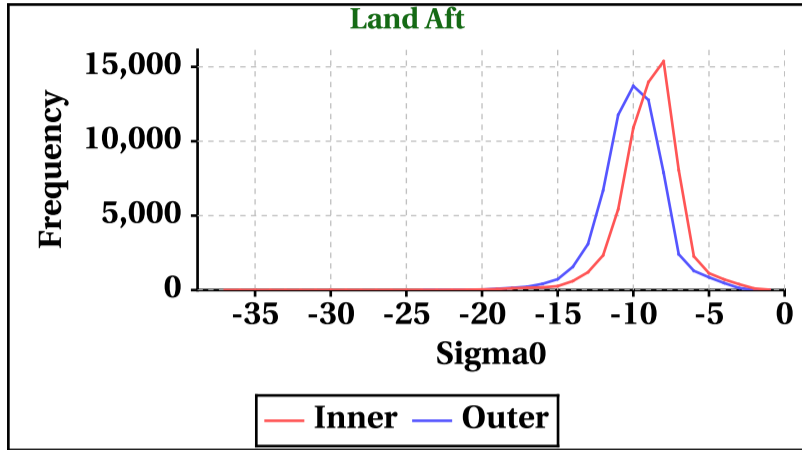

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	601	598	655	655

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	571	563	655	655

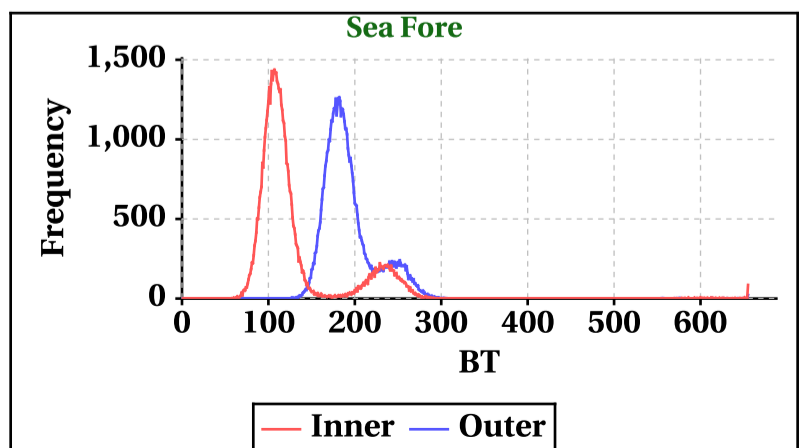
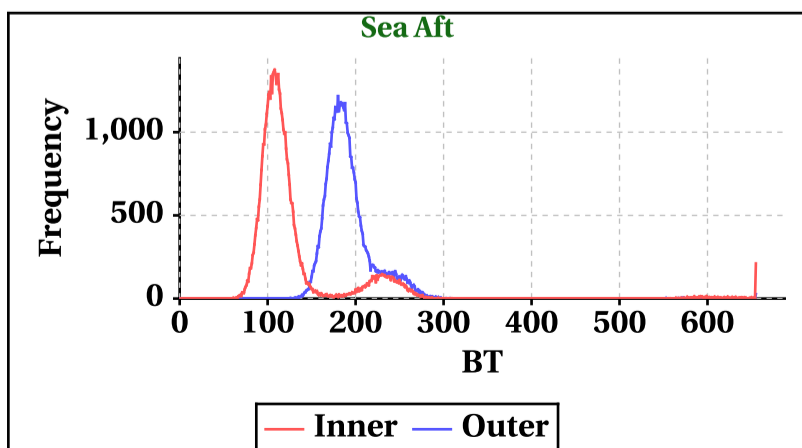
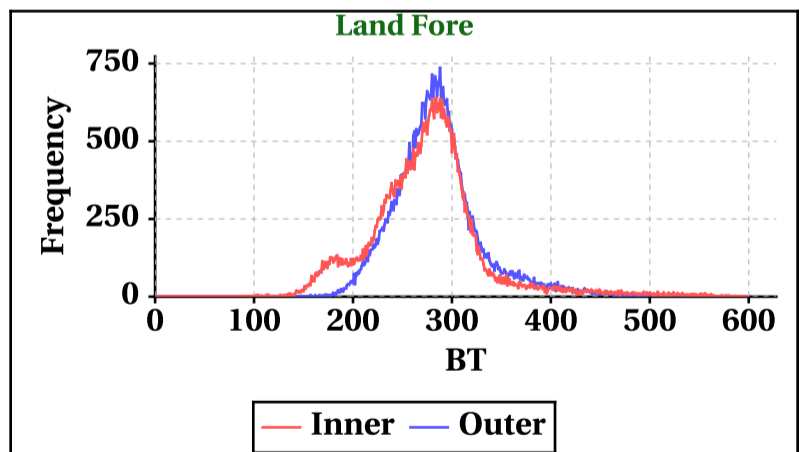
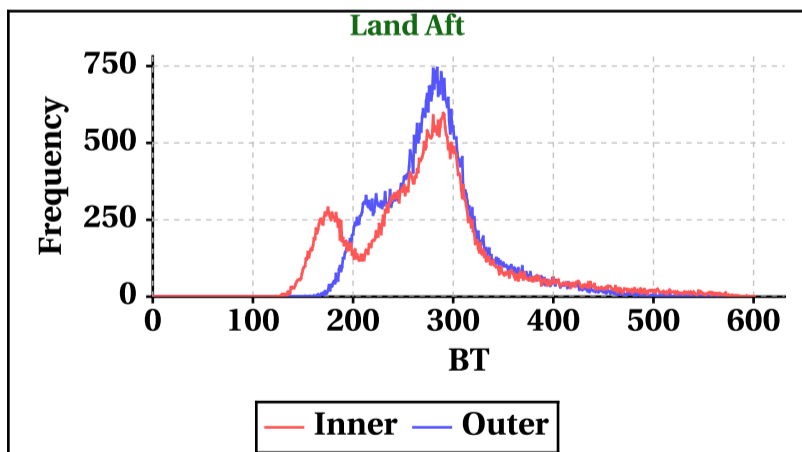


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-6	-18	-34	-34
Max	28	30	27	27

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	-29	-34	-34
Max	22	23	21	21

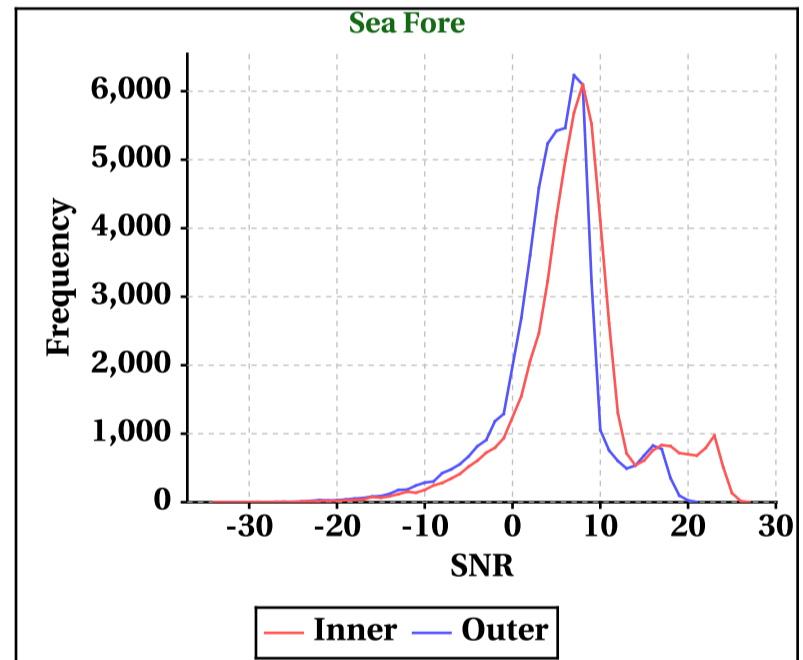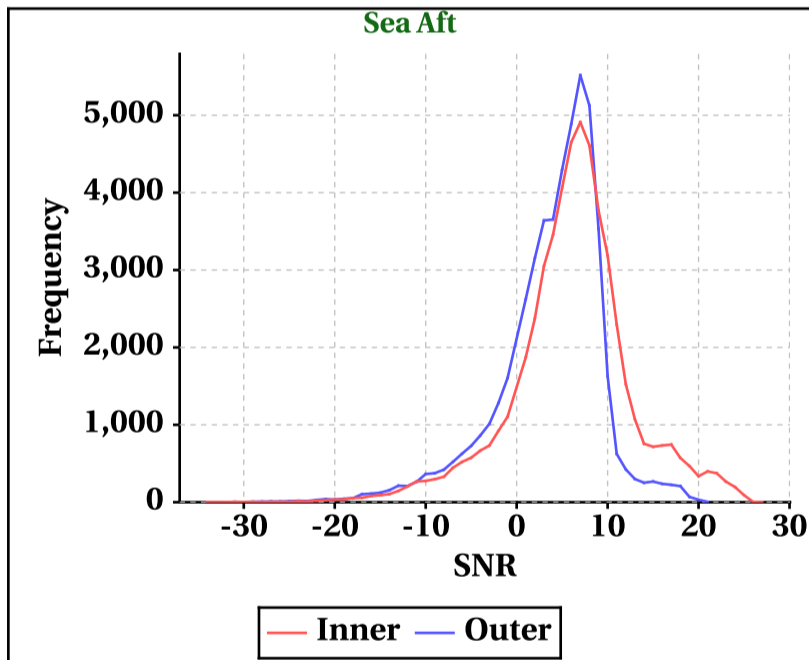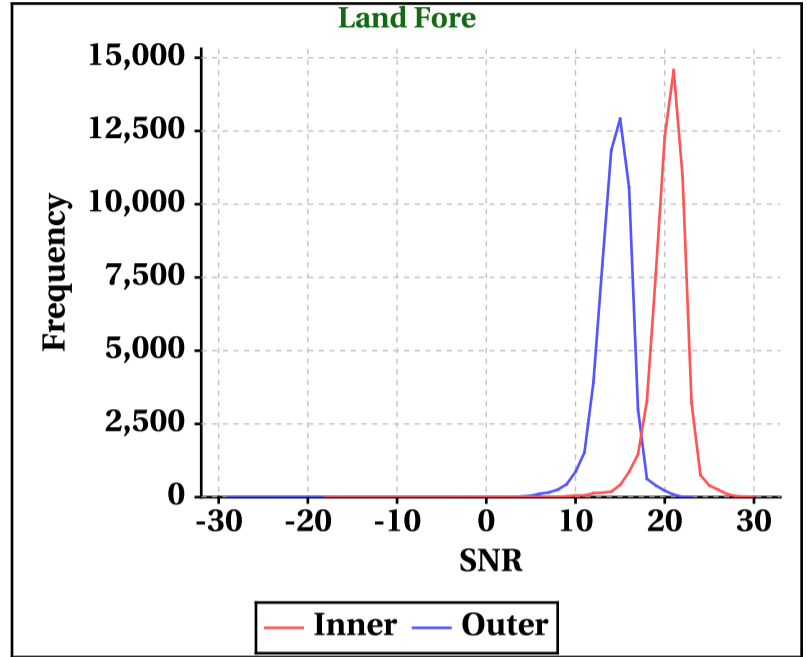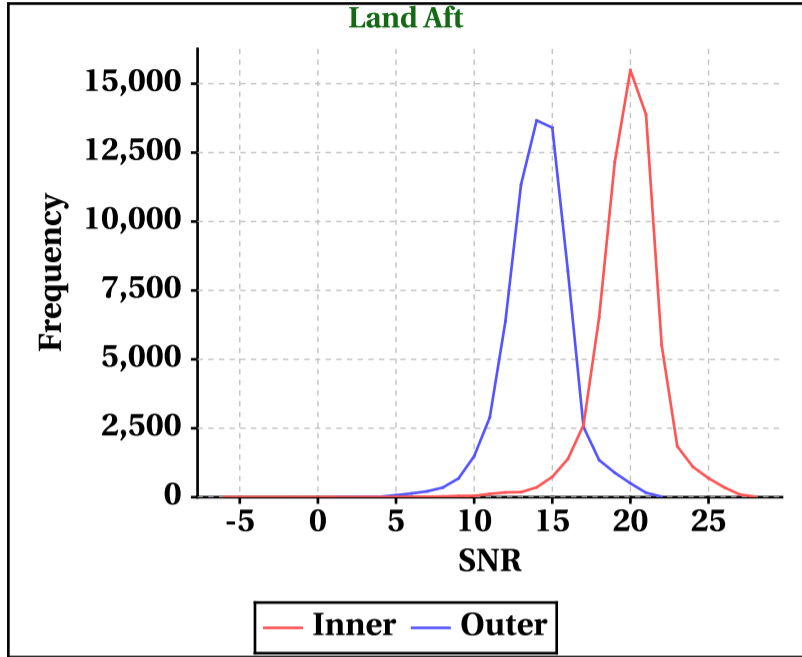


## Orbit-wise behaviour of SNR

**Inner Beam (HH)**

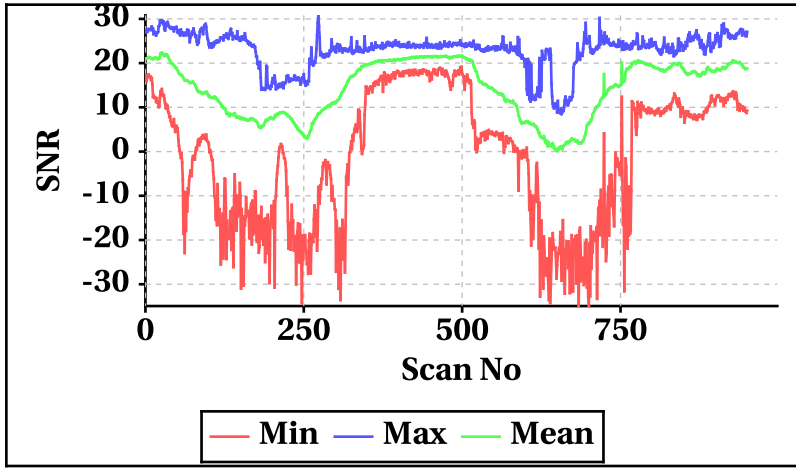


**Outer Beam(VV)**

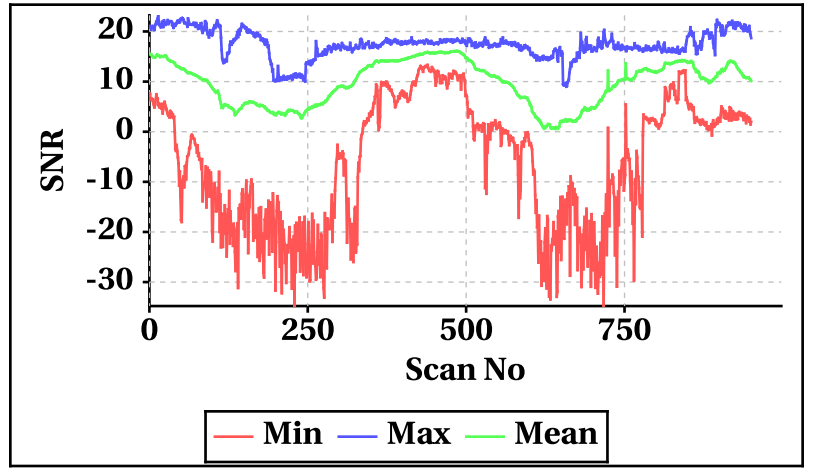


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


**Inner Beam(HH)**

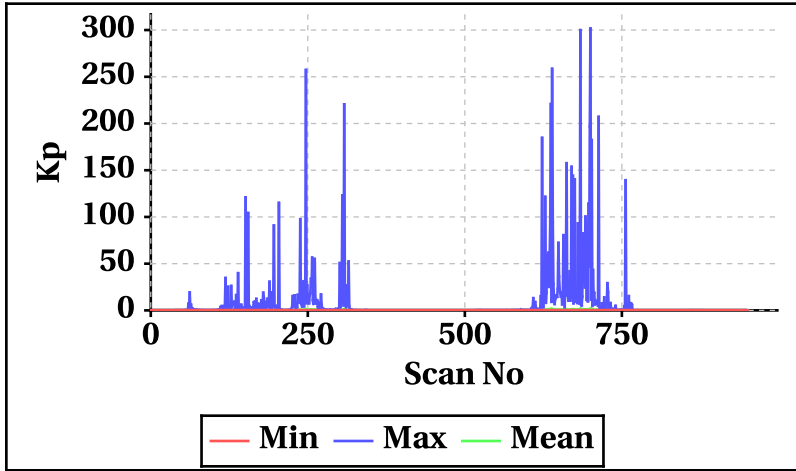


**Outer Beam(VV)**

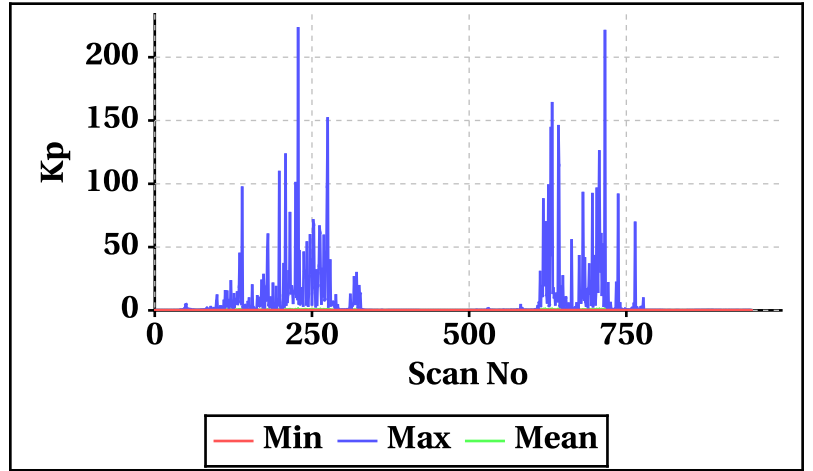


**Inner Beam(HH)**

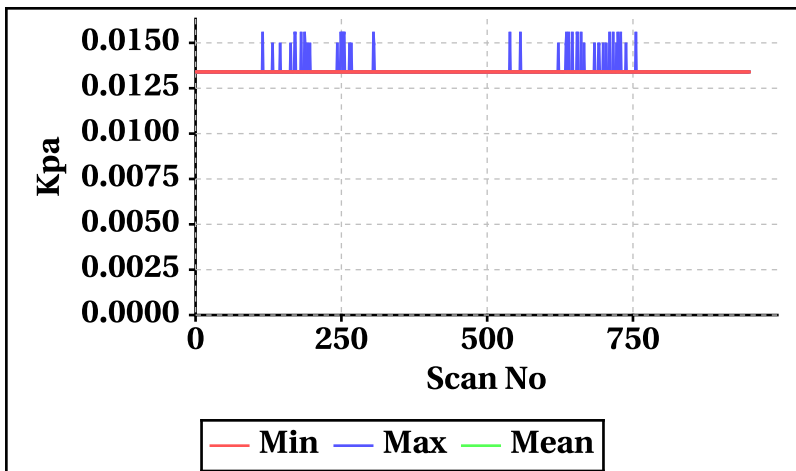


**Outer Beam(VV)**

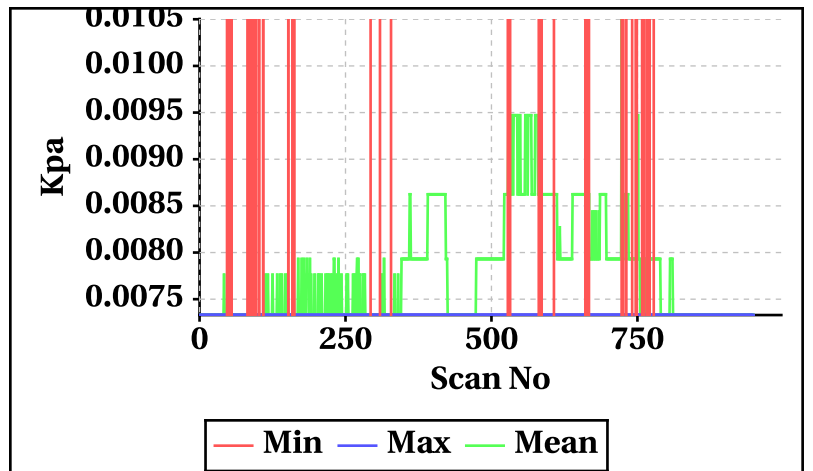


**Inner Beam(HH)**

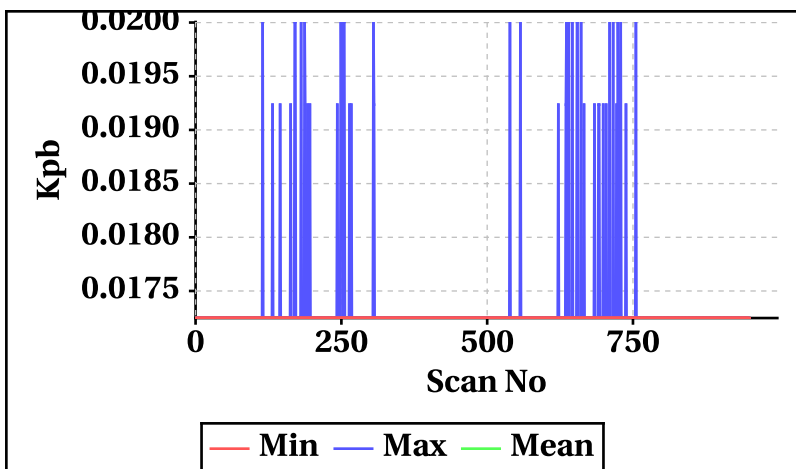


**Outer Beam(VV)**

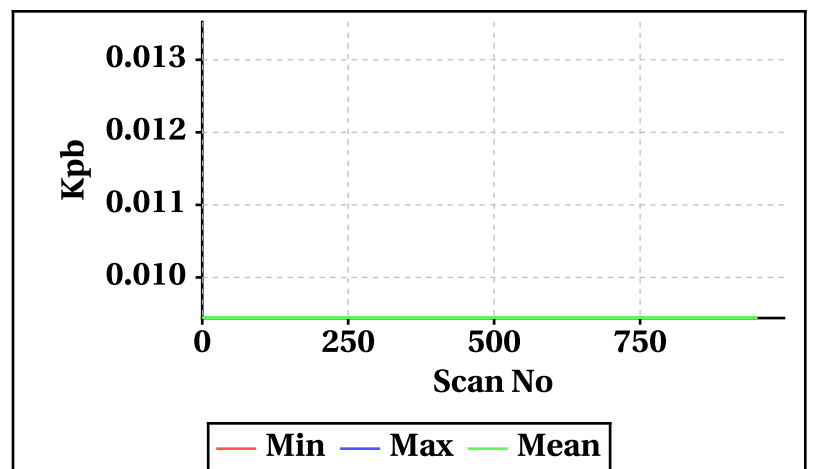

**Inner Beam(HH)**

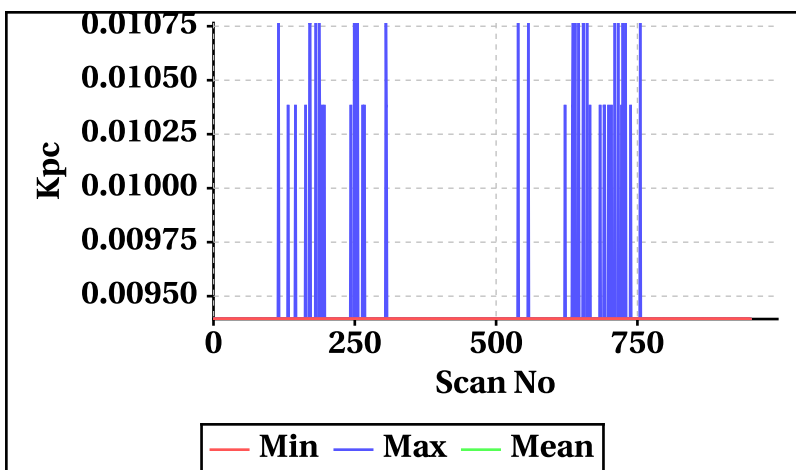


**Outer Beam(VV)**

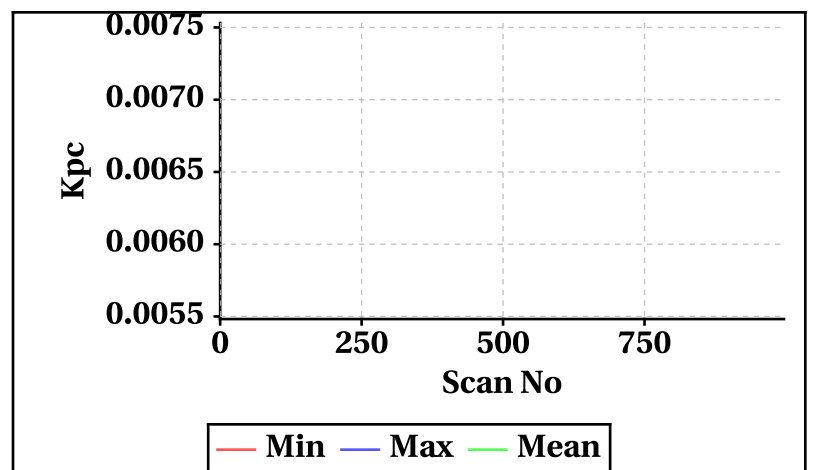




Orbit-wise behaviour of Incidence, Azimuth, Range, X-Factor


Inner Beam (HH)

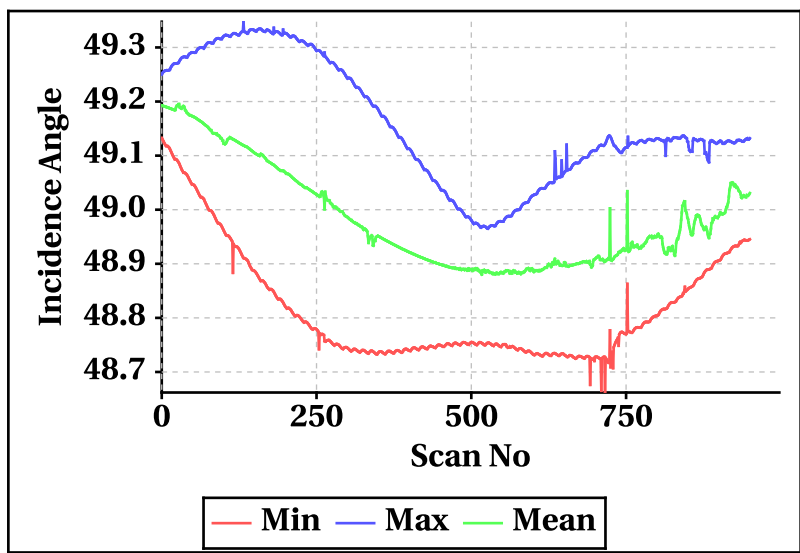


Outer Beam(VV)

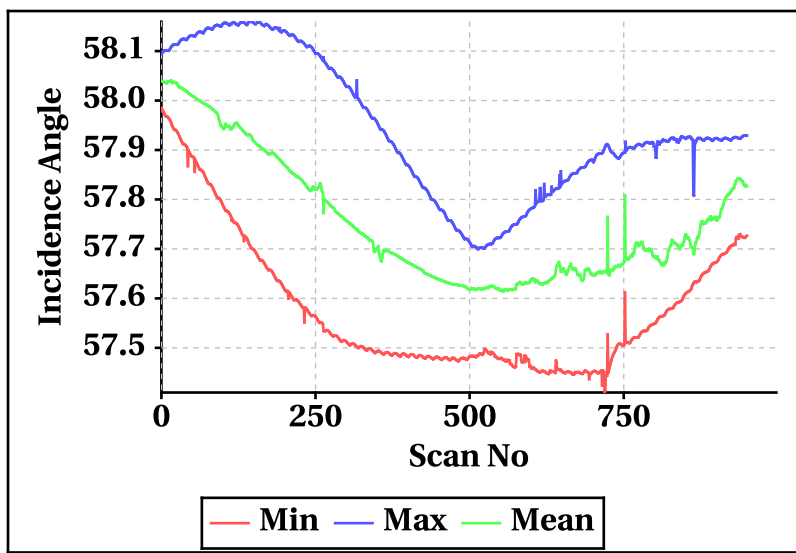


Inner Beam (HH)

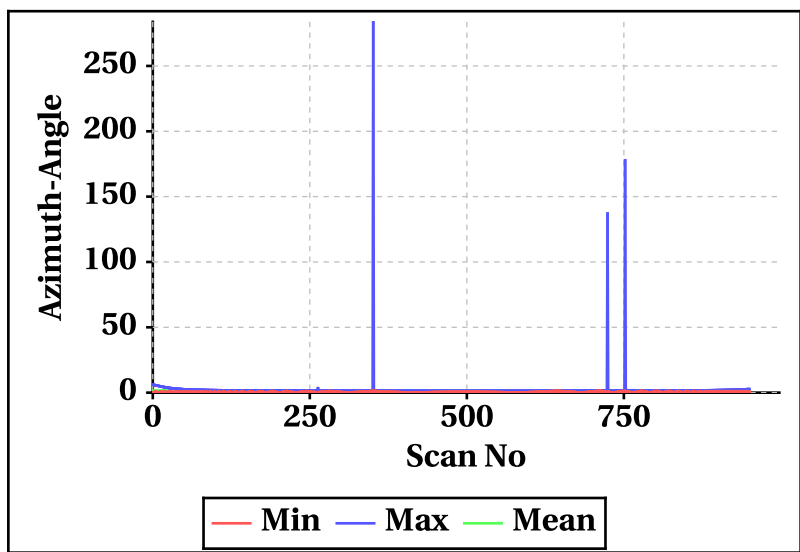


Outer Beam(VV)

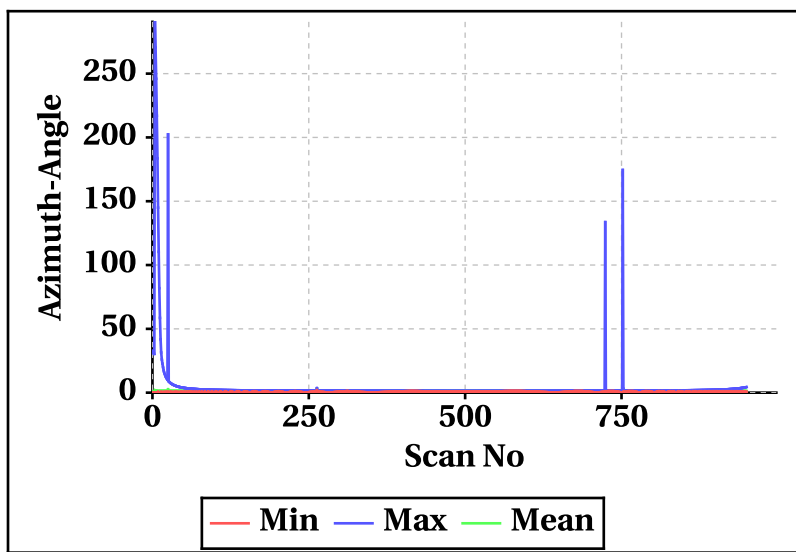


Inner Beam (HH)

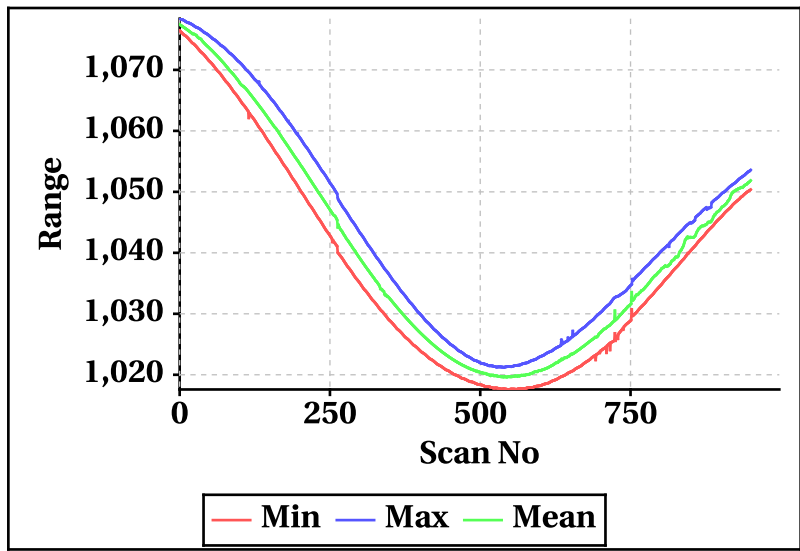


Outer Beam(VV)

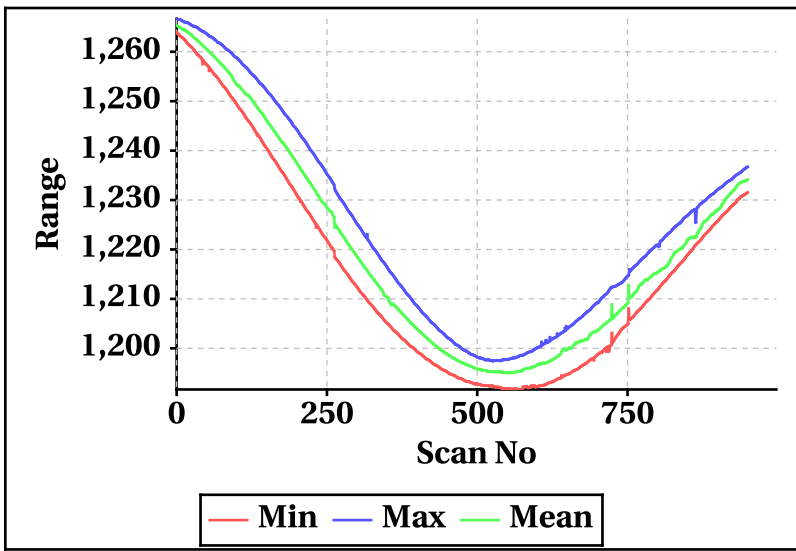

Inner Beam (HH)

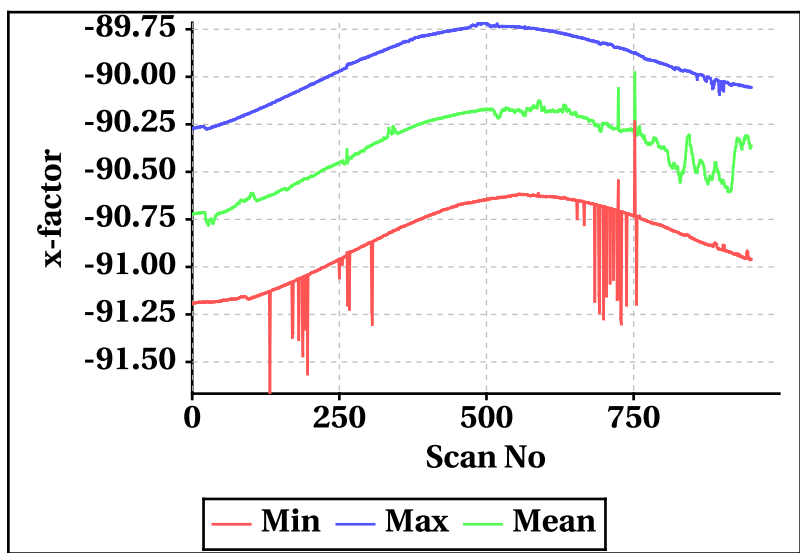

Outer Beam(VV)

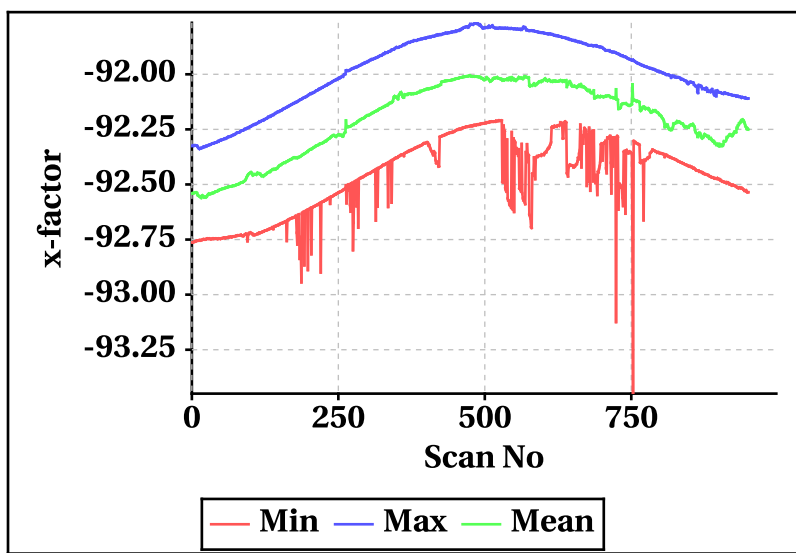


# Doppler Frequency Variation

**Doppler Frequency(KHz) variation statistics Over the half Orbit**

	Inner Beam (HH)	Outer Beam (VV)
<b>Min</b>	-464.04	-520.06
<b>Max</b>	464.24	520.22


**Footprint wise Doppler frequency variation Inner Beam (HH)**

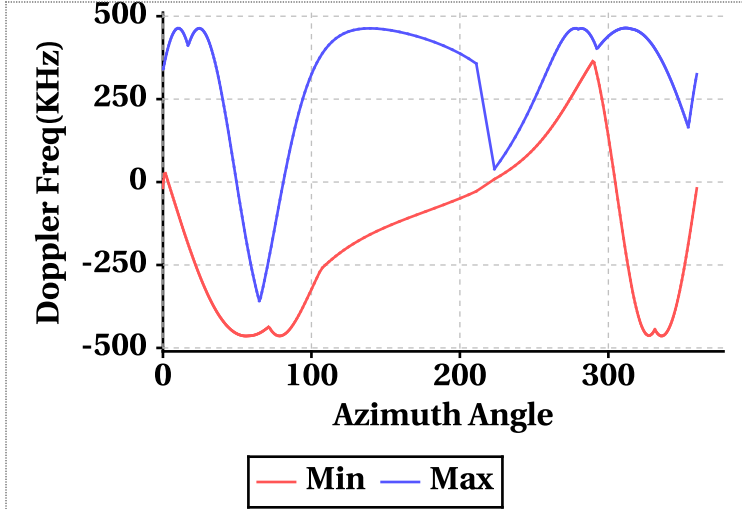


**Doppler Frequency(KHz) variation**

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	8.76	39.44	28.59	4.06	38.08	26.36
Doppler_70	-256.92	463.72	461.57	-276.60	519.90	517.42
Doppler_140	-15.24	422.46	-4.35	-23.02	478.86	-10.73
Doppler_210	-464.00	26.06	-461.62	-519.88	29.38	-517.36
Doppler_280	-17.60	340.92	2.80	-14.00	372.48	8.98


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)**

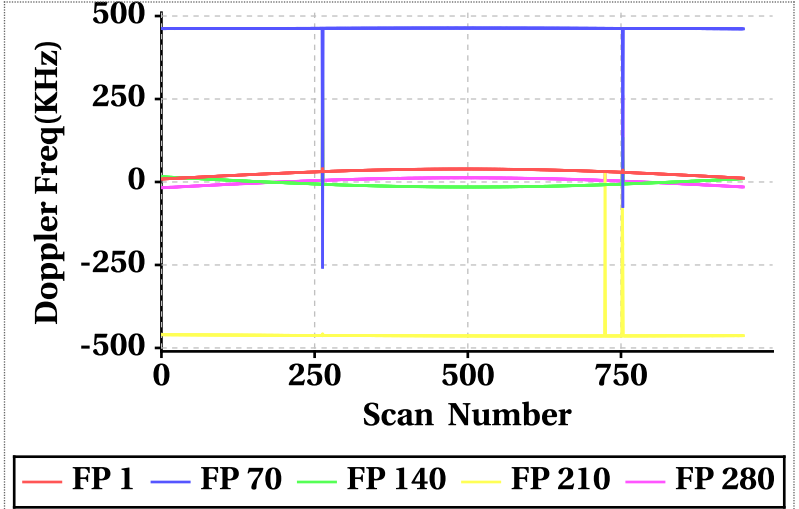

**Footprint wise Doppler frequency variation Outer Beam (VV)**

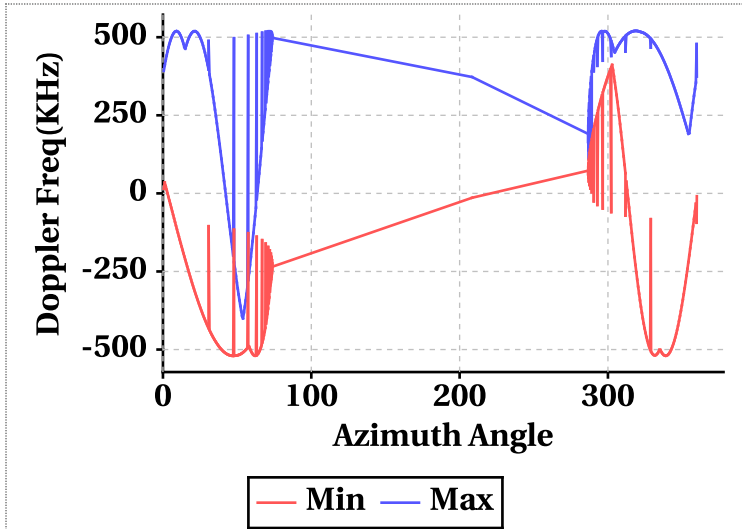


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)**

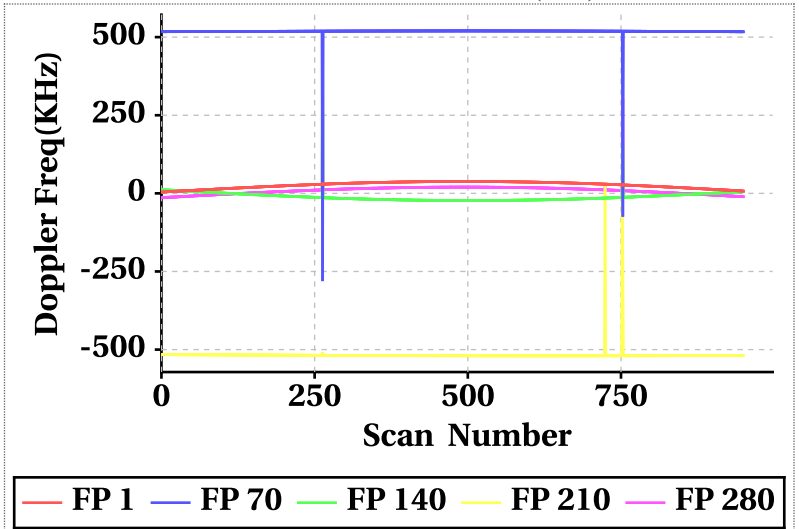


# Latitude Vs Doppler Frequency

**Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]**

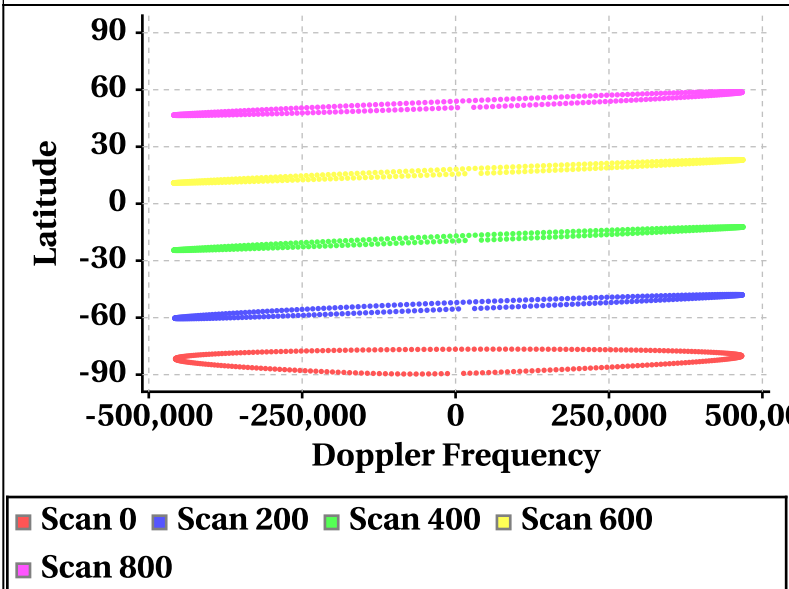


**Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]**

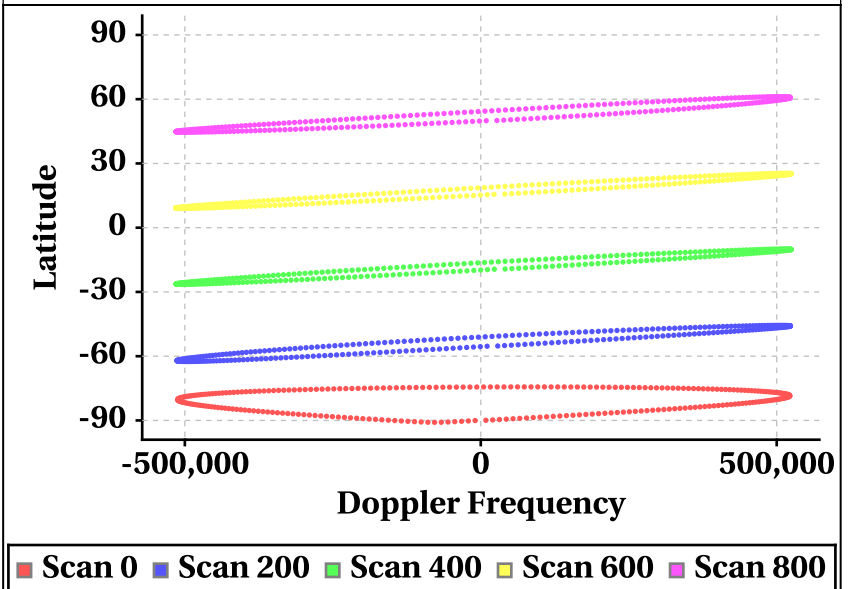

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

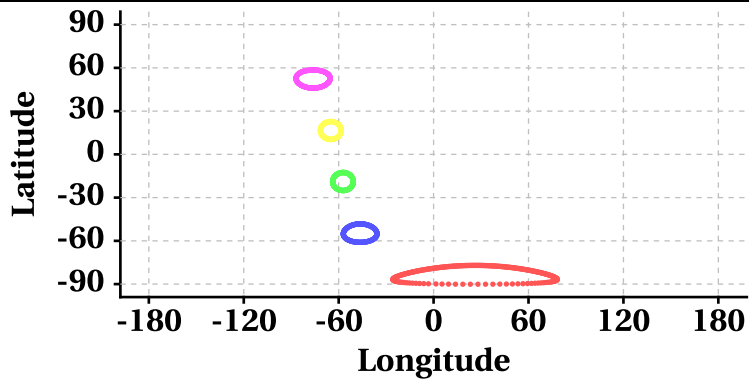

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800


Scan Trace [Outer Beam (VV)]

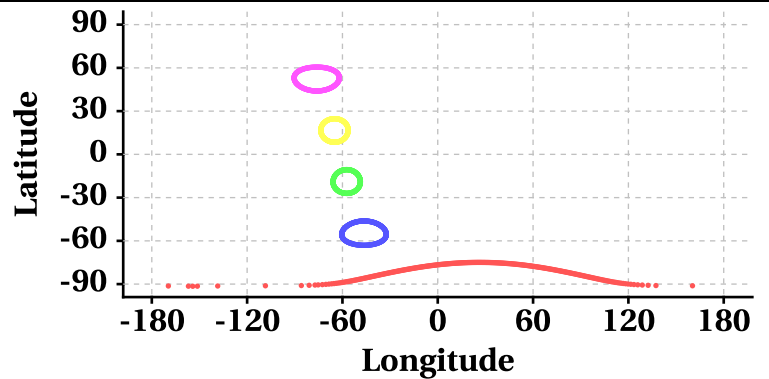

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

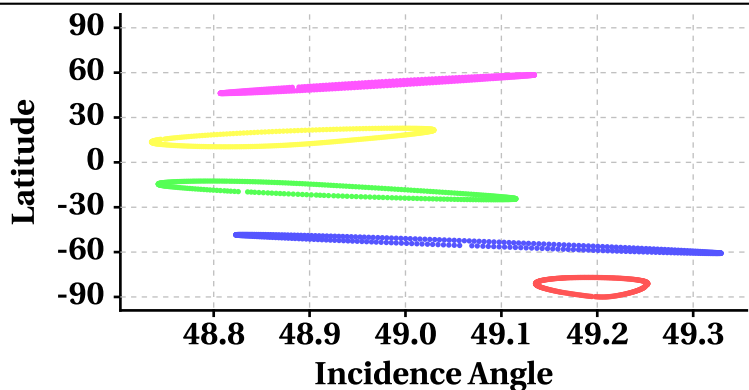

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

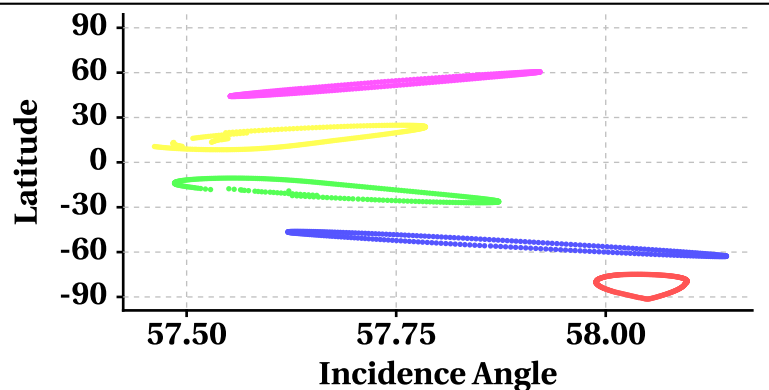

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

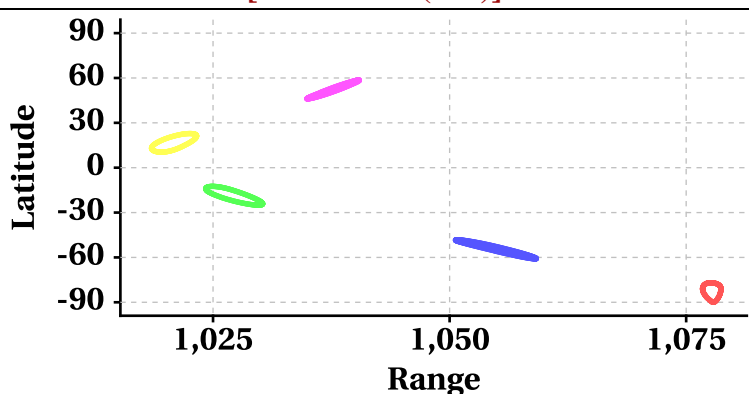

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800

Range at Scan Interval of 200 [Outer Beam(VV)]

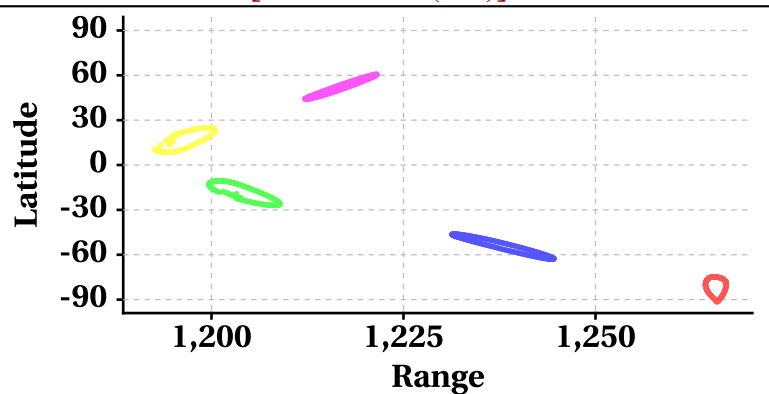

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800



# Variation in Orbit and Attitude Parameters

