


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents

- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	7370	<b>Total Scans</b>	930
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	7371	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	v1.1.2	<b>Rev. Number</b>	07370_07371	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	SN	<b>Data Production Date</b>	16-02-2018	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	16-02-2018	<b>Equator Crossing Time</b>	13:19:41.000	<b>No Of Outer Slices</b>	14

## Brightness Temperature(k) Footprint trace

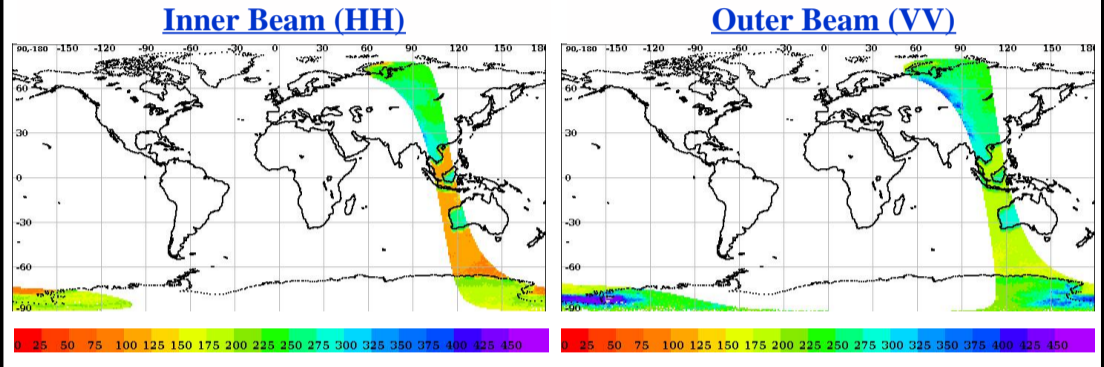


## Image Snapshot for Inner & Outer Beam

Inner (HH)

Outer (VV)



## Sigma0(dB) Footprint trace

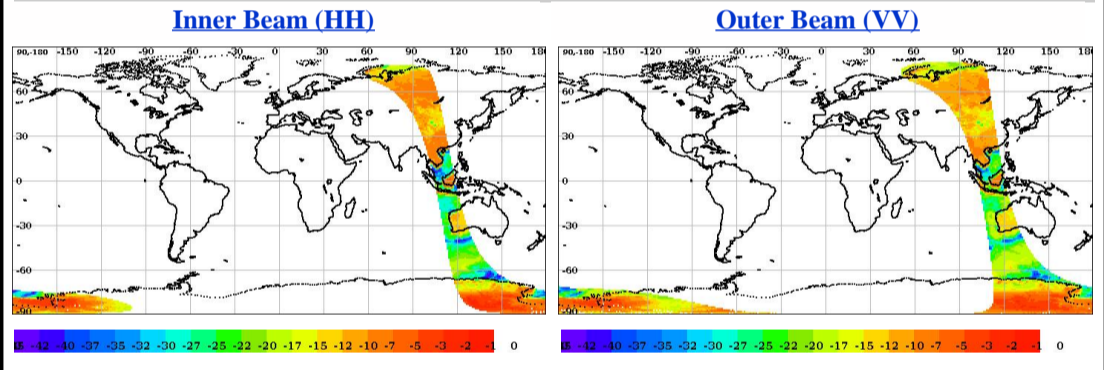


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
<b>Invalid Sigma0(%)</b>	0.02	0.23
Data Not Available From Payload (%)	100.0	8.928572
Slice not within sample array limits (%)	0.00	91.07
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
<b>Poor Sigma0(%)</b>	0.01	0.01
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	100.0	100.0


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

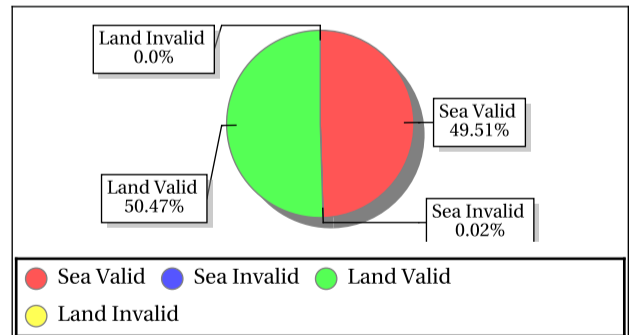

### Outer Beam (VV)

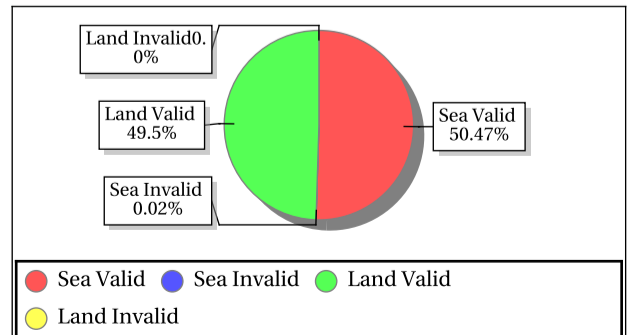

## Invariant Site Sigma-0 Statistics for Ascending/Descending, Fore/Aft in HH/VV beams

Site Name	Center Lat	Center Lon	Beam	Node	ScanDir	Sigma0 Min	Sigma0 Max	Sigma0 Mean	Sigma0 Std	BT Min	BT Max	BT Mean	BT Std
ANT_1	-75.00	121.00	Inner	ASC	Aft	-9.27	-5.75	-7.42	0.86	150.59	216.94	183.02	15.31
ANT_1	-75.00	121.00	Inner	ASC	Fore	-9.49	-5.98	-7.55	0.82	158.21	213.79	180.85	13.27
Australia	-23.00	118.00	Inner	ASC	Aft	-12.21	-8.93	-10.65	0.58	249.71	320.46	272.05	15.26
Australia	-23.00	118.00	Inner	ASC	Fore	-11.94	-8.83	-10.11	0.68	243.66	309.25	272.17	17.18
ANT_1	-75.00	121.00	Outer	ASC	Aft	-9.56	-7.13	-8.39	0.75	214.26	243.80	227.64	7.05
ANT_1	-75.00	121.00	Outer	ASC	Fore	-9.25	-6.91	-8.05	0.74	179.21	215.89	201.07	11.60
Australia	-23.00	118.00	Outer	ASC	Aft	-13.19	-11.18	-12.36	0.54	239.29	312.01	275.15	19.20
Australia	-23.00	118.00	Outer	ASC	Fore	-12.79	-10.83	-11.88	0.54	251.94	321.32	283.31	15.07



## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.10	227.73	0.38	3.788	0.10	237.43	0.33	3.247	0.10	0.30	0.10	0.000	0.10	0.27	0.10	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.31	20.84	3.06	0.000	-34.49	21.43	3.65	0.000	-3.97	31.41	18.33	9.897	-3.36	31.55	19.47	15.211

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.08	204.33	0.35	4.000	0.08	214.29	0.37	3.876	0.08	0.97	0.09	0.000	0.08	0.56	0.09	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.00	0.01	0.00	0.000	0.00	0.01	0.00	0.000	0.00	0.01	0.00	0.000	0.00	0.01	0.00	0.000
<b>SNR</b>	-34.72	15.43	1.43	0.000	-34.92	17.32	1.00	0.000	-11.20	21.88	12.90	0.000	-8.51	23.85	13.59	0.264

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)

	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.74	49.48	49.11	0.000	57.52	58.42	58.07	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0026	6.83	1.27	1.508	0.0000	288.45	1.27	2.791	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1030.38	1100.28	1058.76	11.187	1207.66	1294.98	1243.77	25.775	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-92.13	-89.35	-90.56	0.000	-93.68	-91.83	-92.50	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	15.12	15.81	15.45	0.000	20.12	20.72	20.34	0.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.81	20.71	19.71	0.000	18.53	20.71	19.61	0.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



## Sigma0 Behaviour (Sigma0 Vs SNR)

Footprint-Land


Sigma0 Vs SNR (Land)

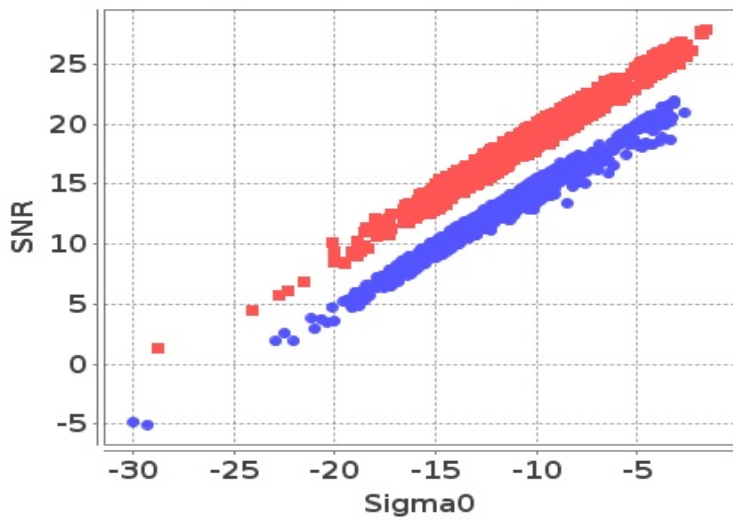

■ Inner ● Outer

Footprint-Sea


Sigma0 Vs SNR (Sea)

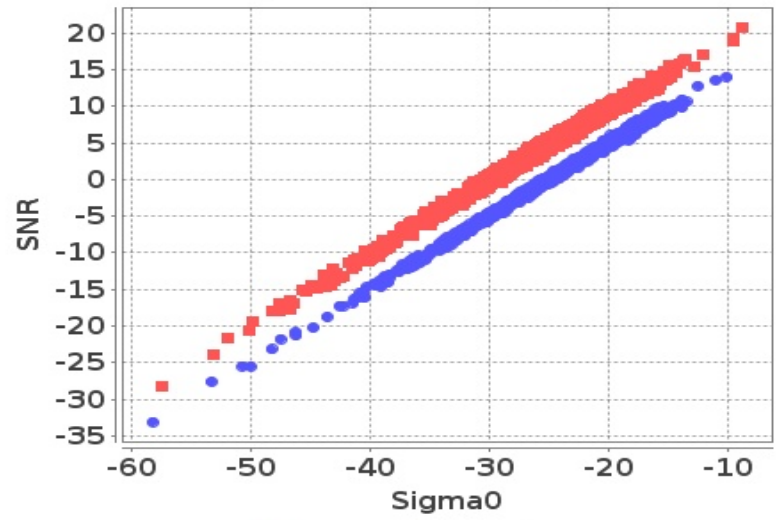

■ Inner ● Outer

Slice-Land


Sigma0 Vs SNRatSlice (Land)

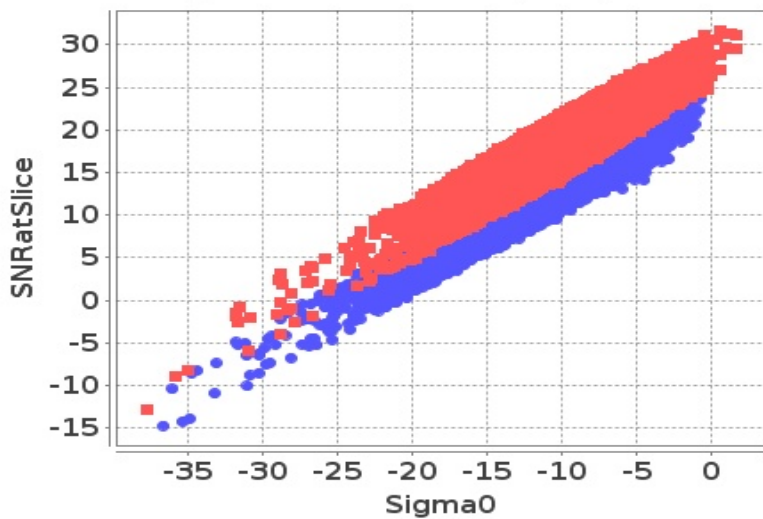

■ Inner ● Outer

Slice-Sea

Sigma0 Vs SNRatSlice (Sea)

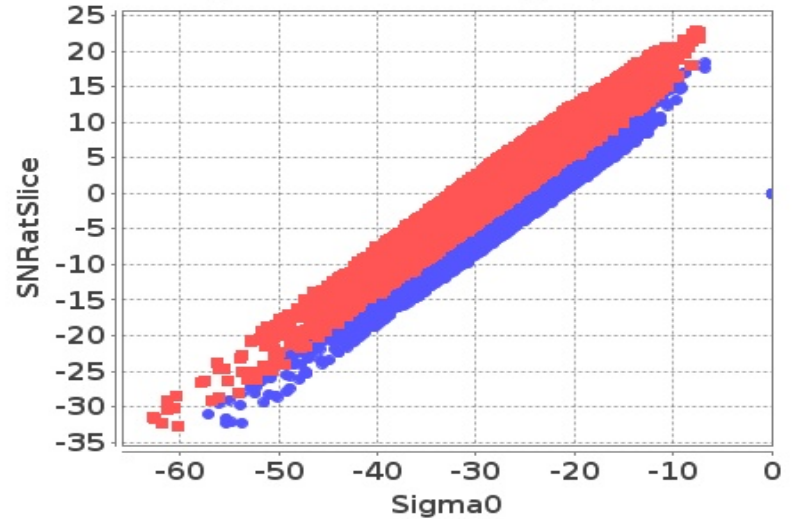


■ Inner ● Outer

## Sigma0 Behaviour (Kp Vs SNR)

Slice


Kp Vs SNRatSlice (Land)

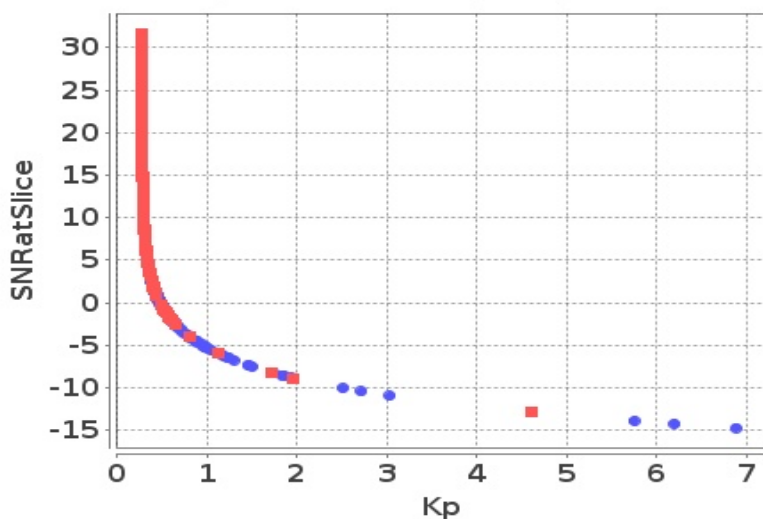

■ Inner ● Outer

Slice

Kp Vs SNRatSlice (Sea)

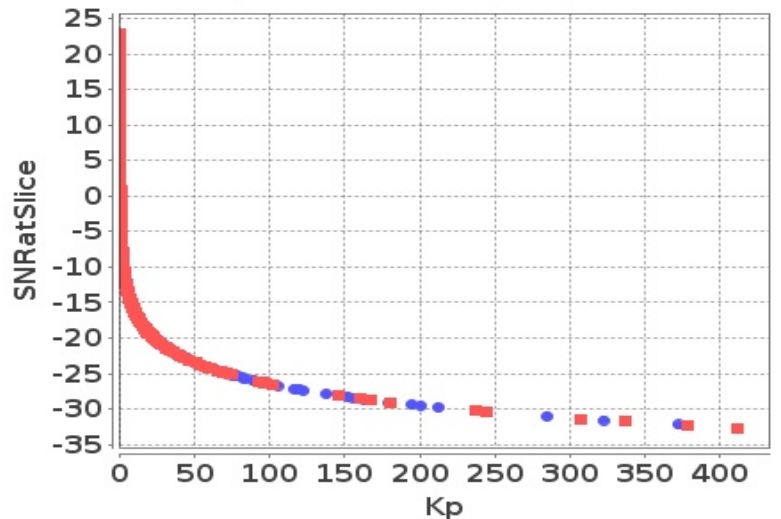


■ Inner ● Outer



# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

### Sigma0 Vs Kp (Land)

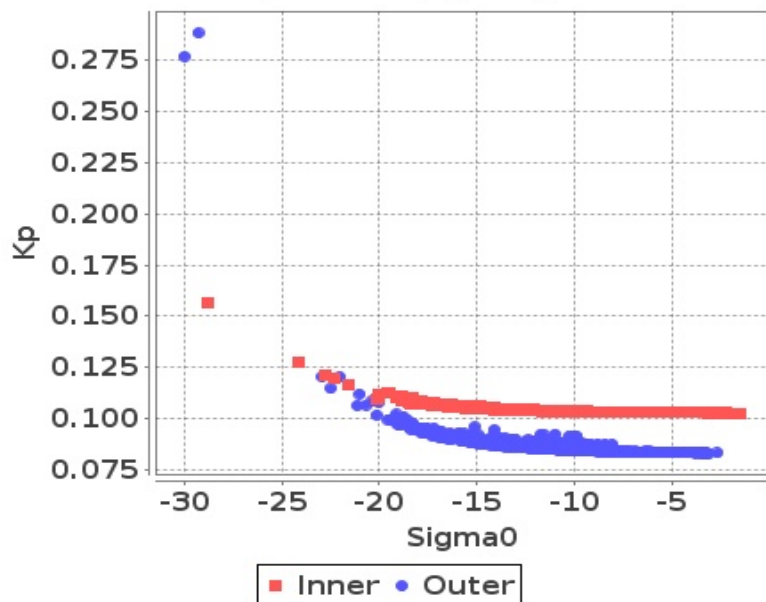


## Footprint-Sea

### Sigma0 Vs Kp (Sea)

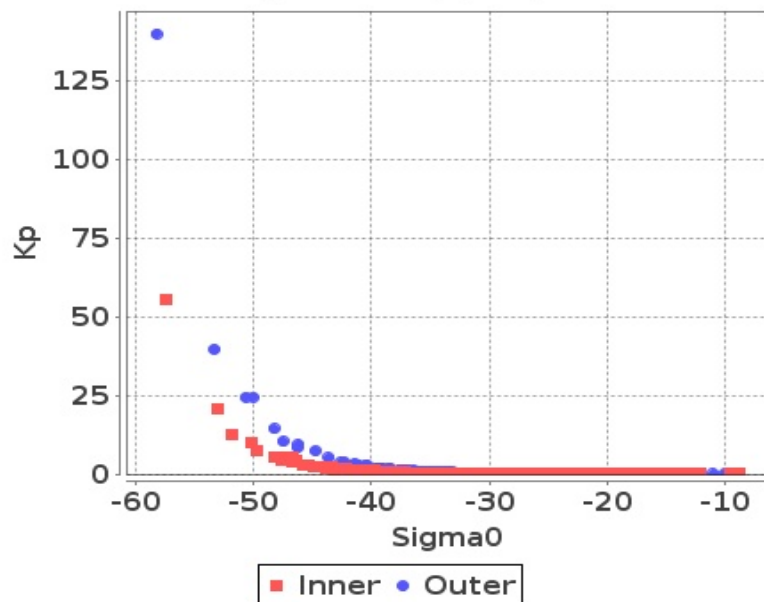


## Slice-Land

### Sigma0 Vs KpatSlice (Land)

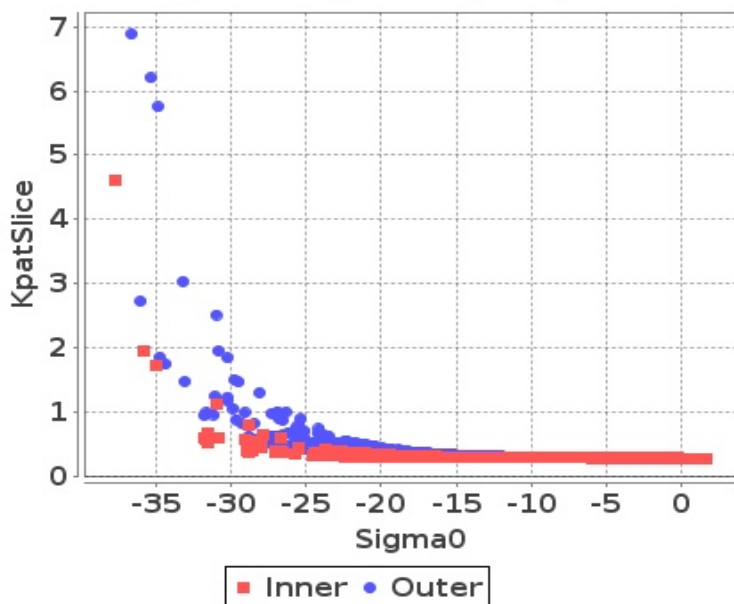

## Slice-Sea

### Sigma0 Vs KpatSlice (Sea)




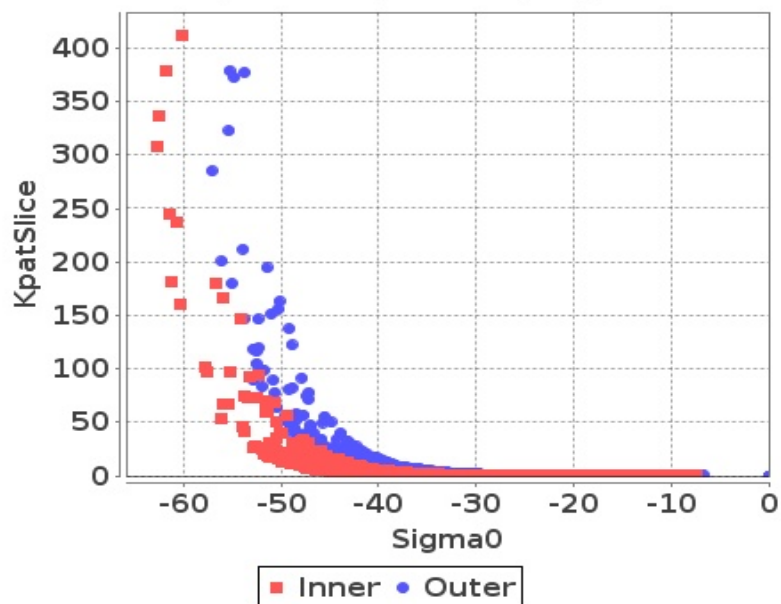


# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-32	-33	-63	-65
Max	2	1	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-35	-33	-59	-60
Max	0	0	0	0

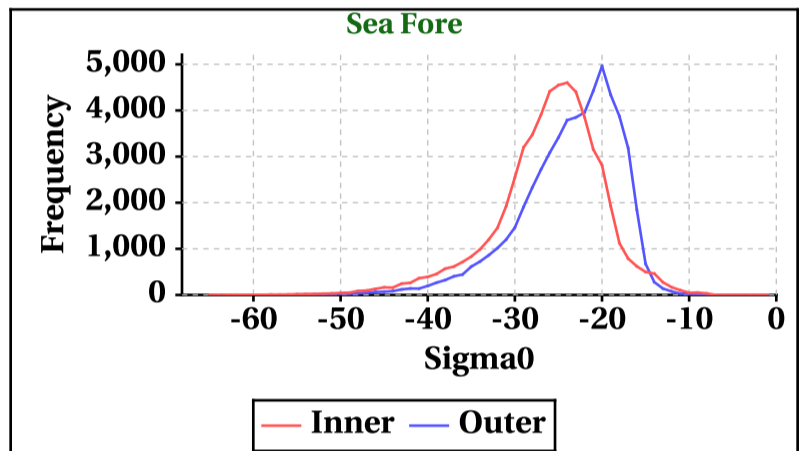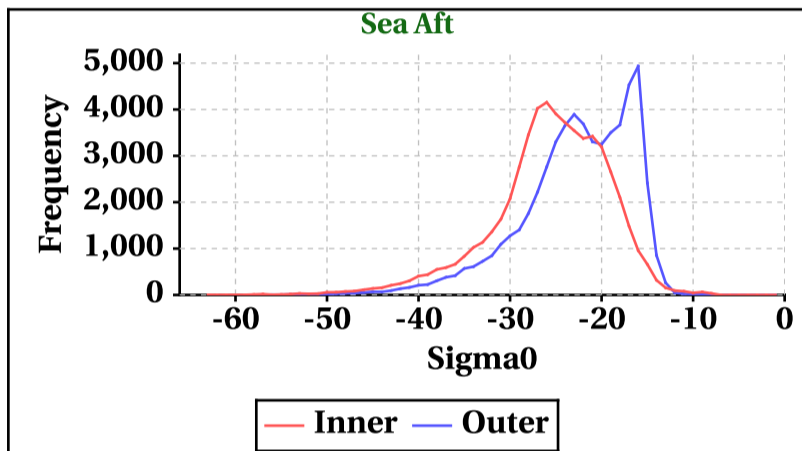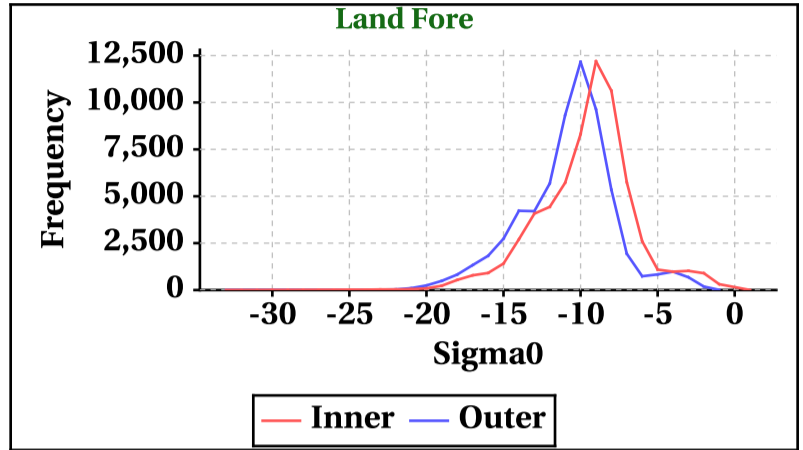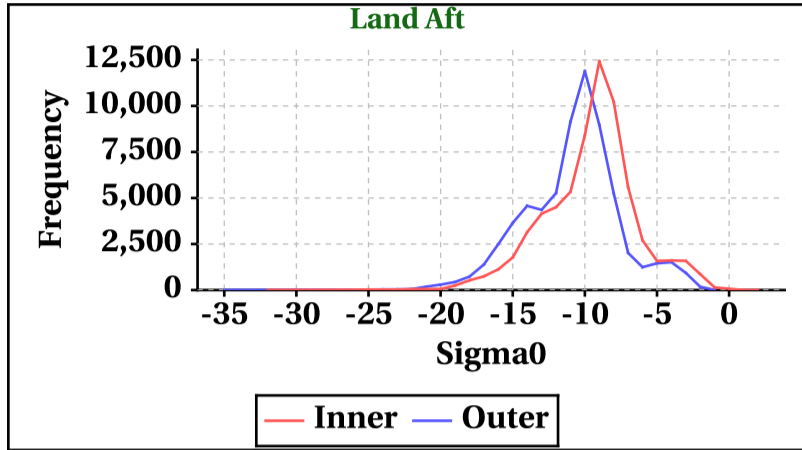

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	494	444	279	292

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	655	524	363	312

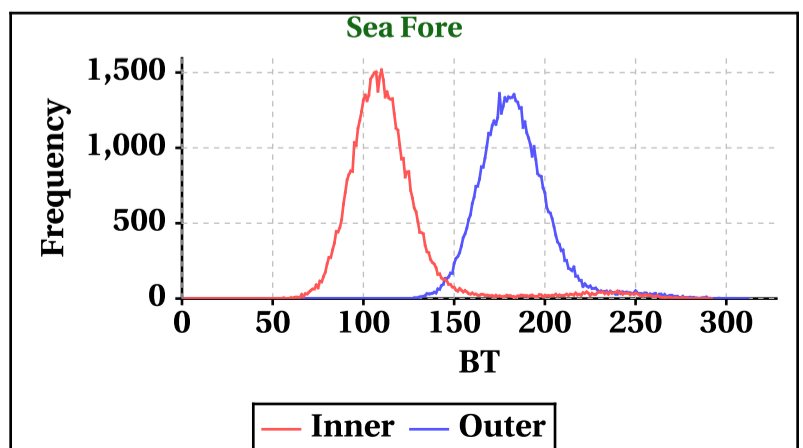
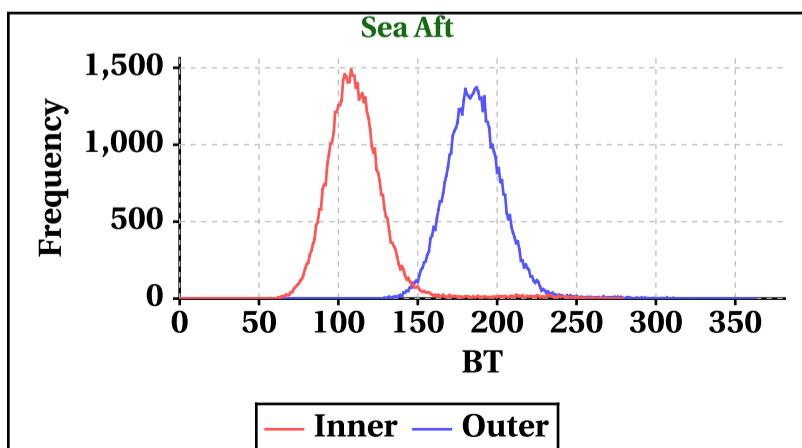
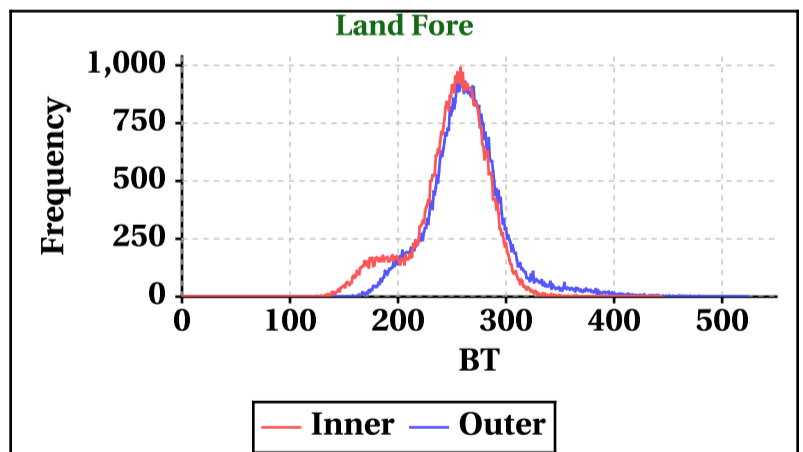
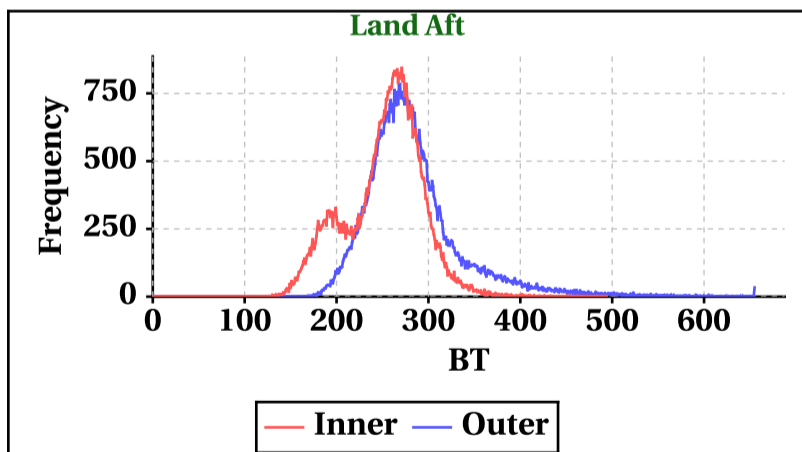


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-3	-3	-34	-34
Max	31	31	20	21

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-11	-8	-34	-34
Max	21	23	15	17

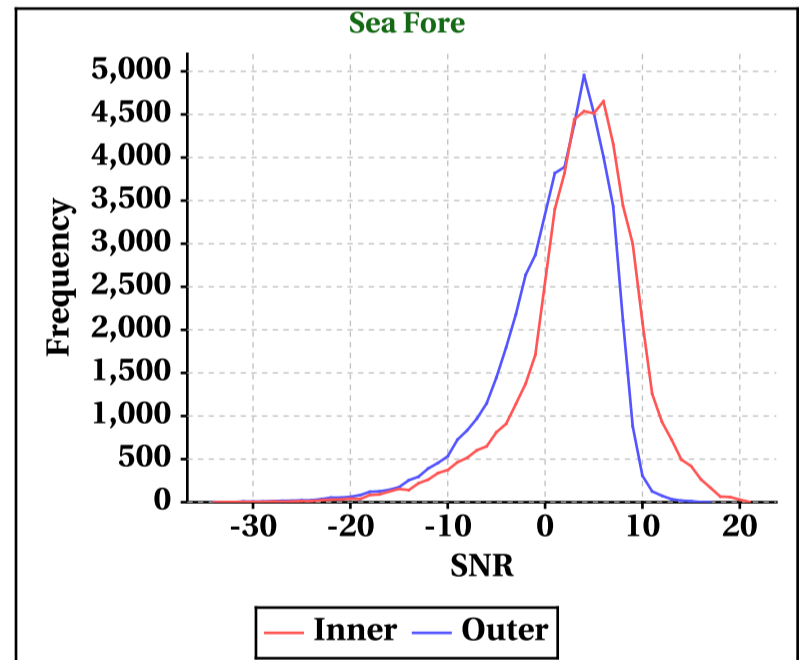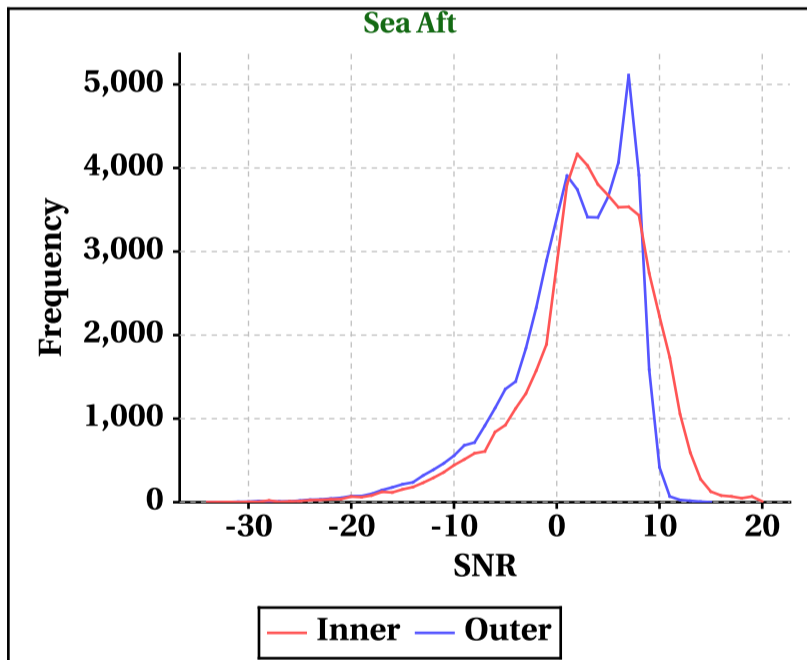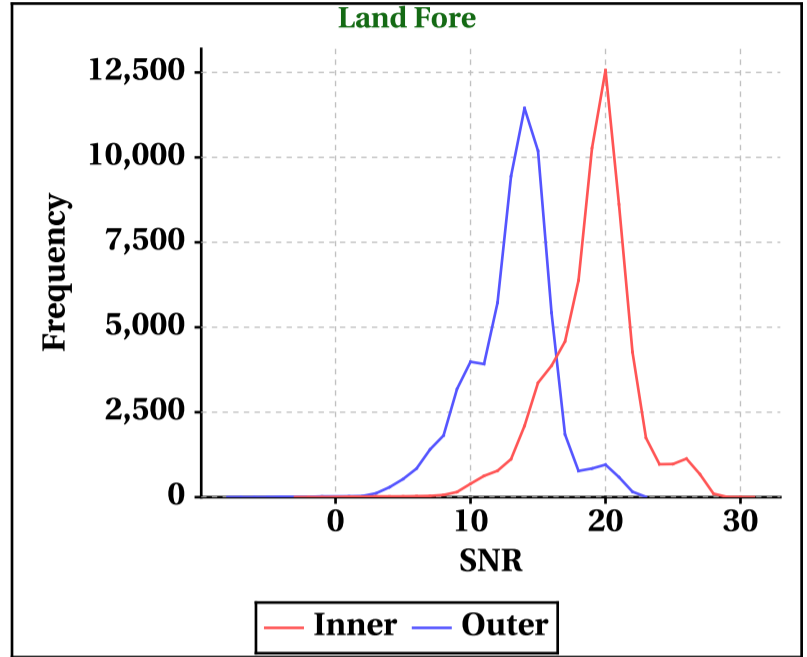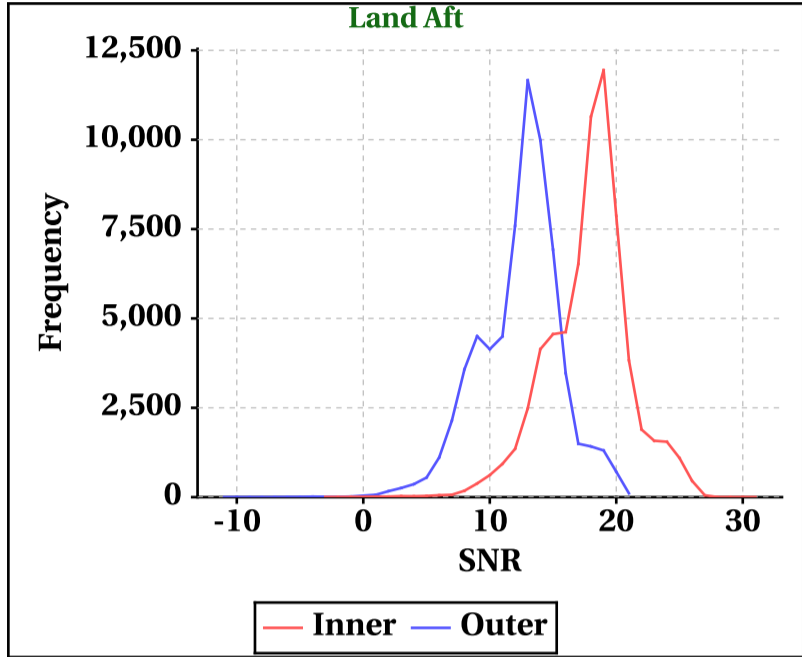


## Orbit-wise behaviour of SNR

**Inner Beam (HH)**

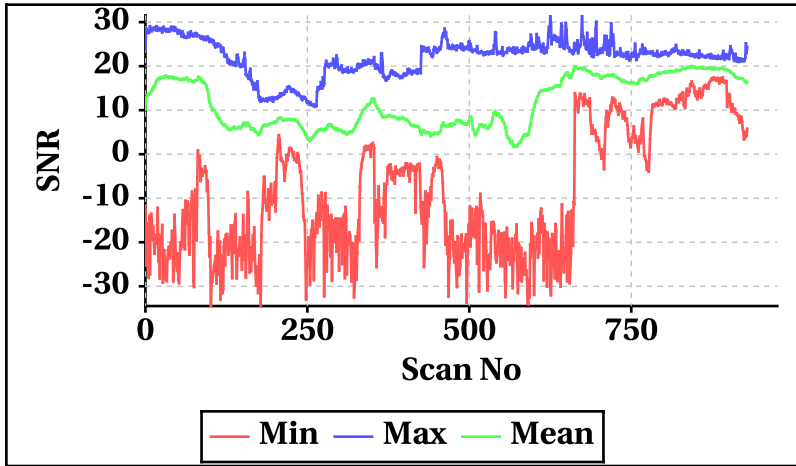


**Outer Beam(VV)**

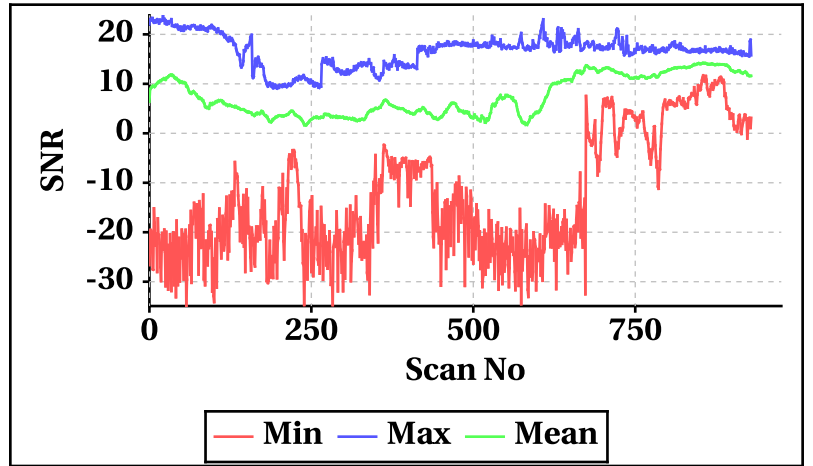


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


**Inner Beam(HH)**

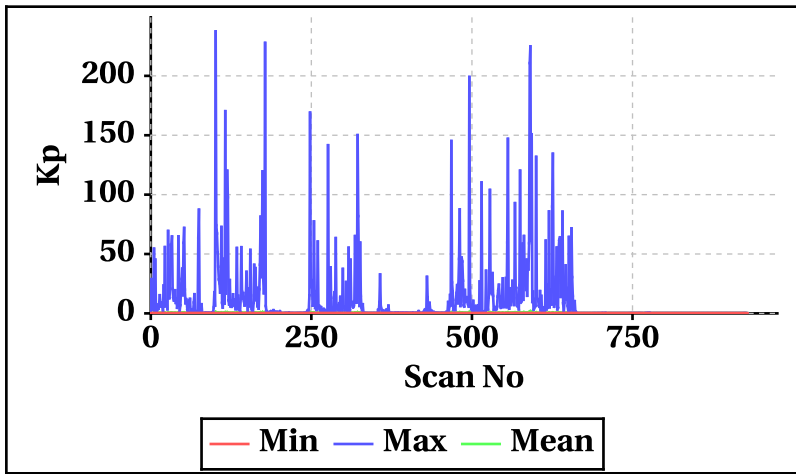


**Outer Beam(VV)**

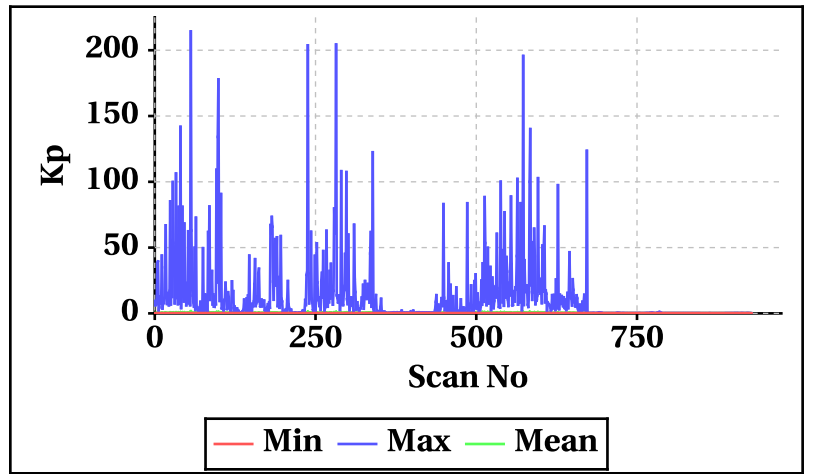


**Inner Beam(HH)**

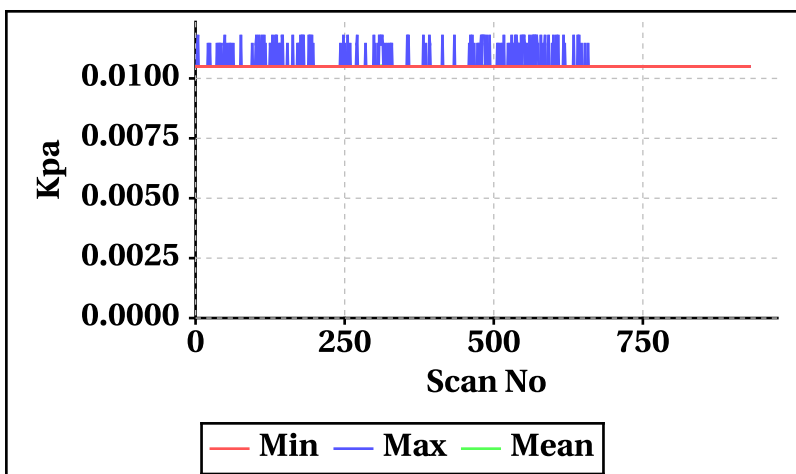


**Outer Beam(VV)**

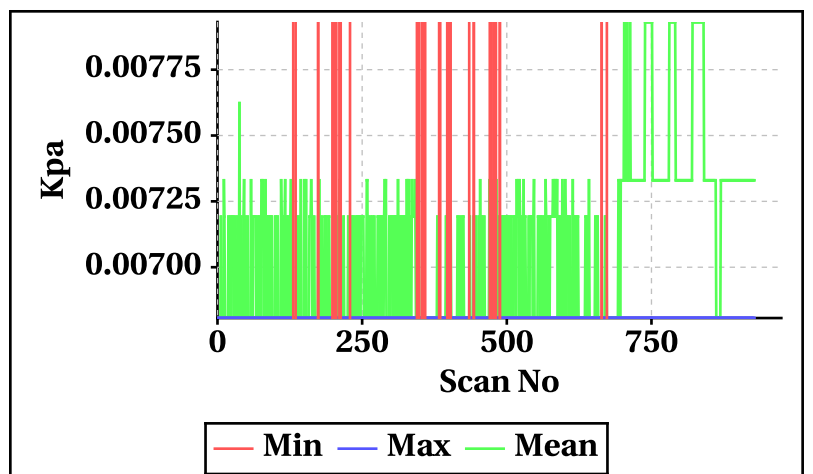


**Inner Beam(HH)**

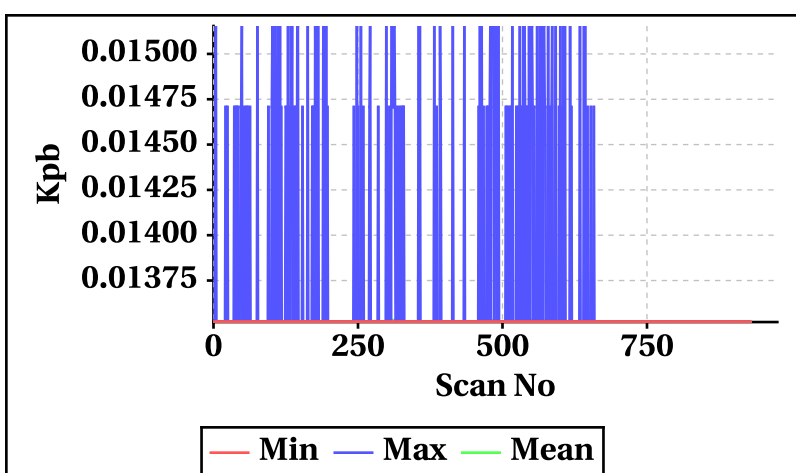


**Outer Beam(VV)**

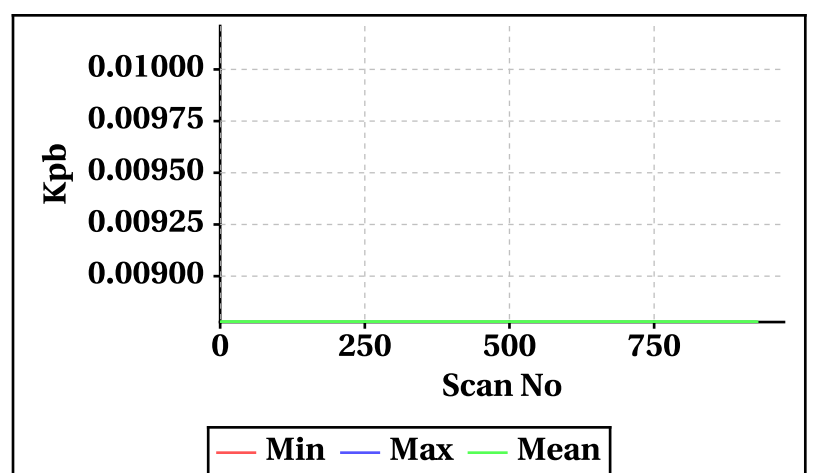

**Inner Beam(HH)**

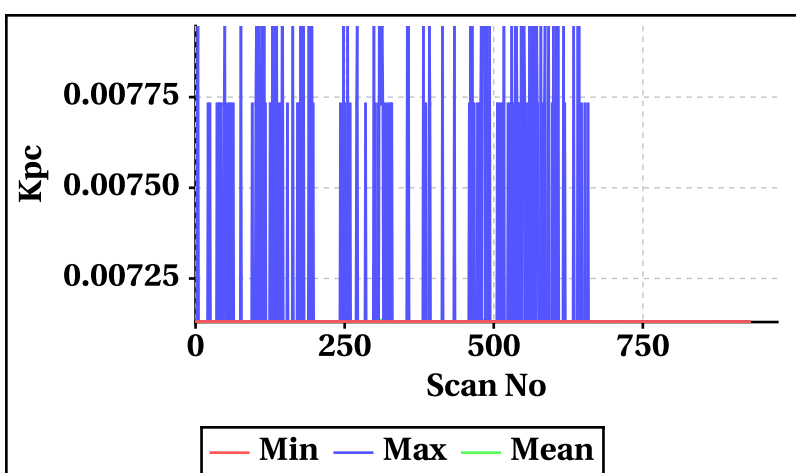


**Outer Beam(VV)**

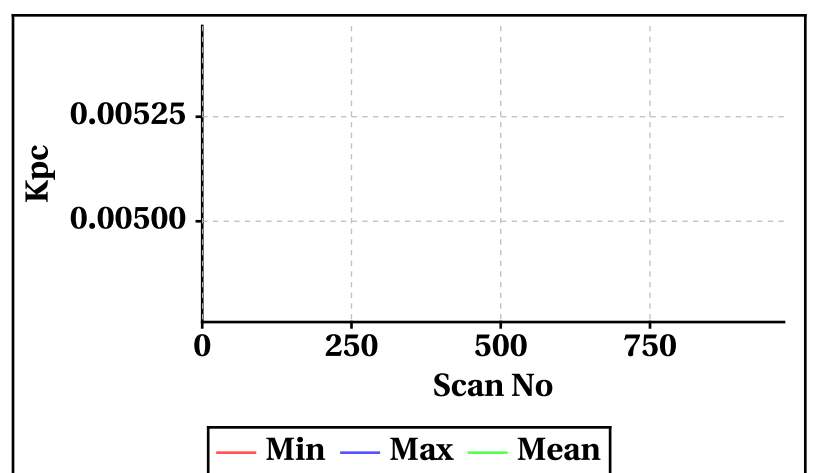




# Orbit-wise behaviour of Incidence, Azimuth, Range, X-Factor


**Inner Beam (HH)**

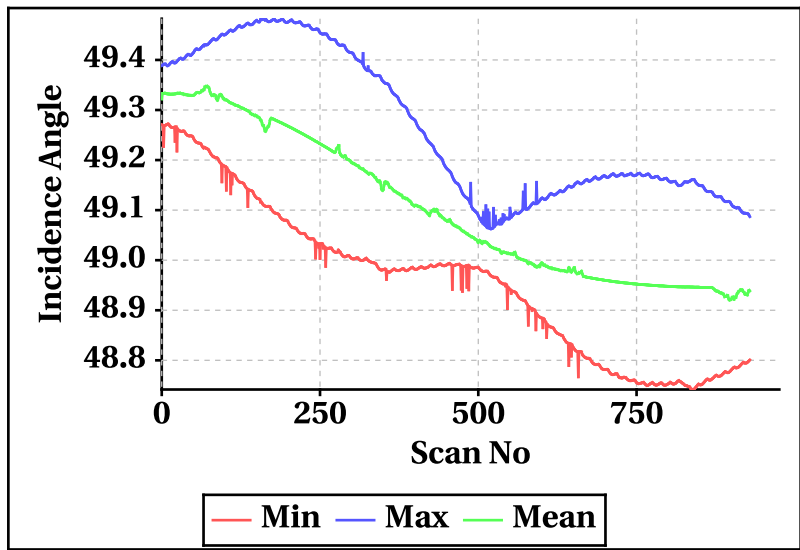


**Outer Beam(VV)**

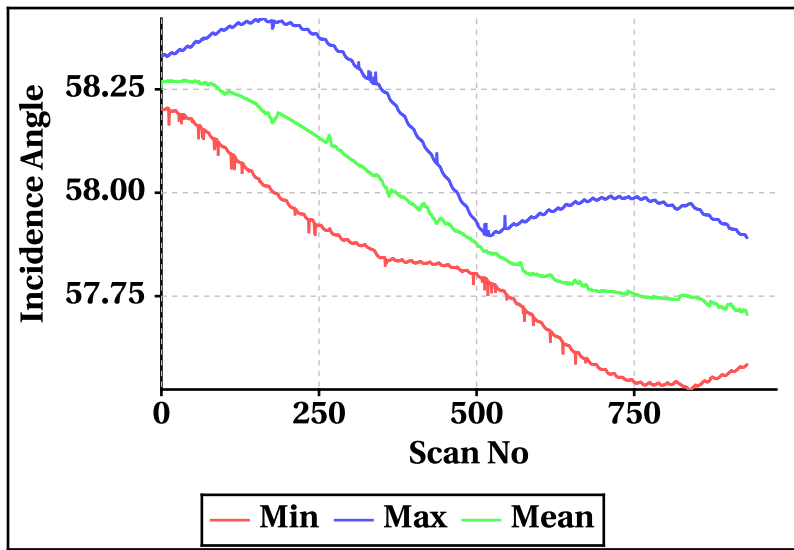


**Inner Beam (HH)**

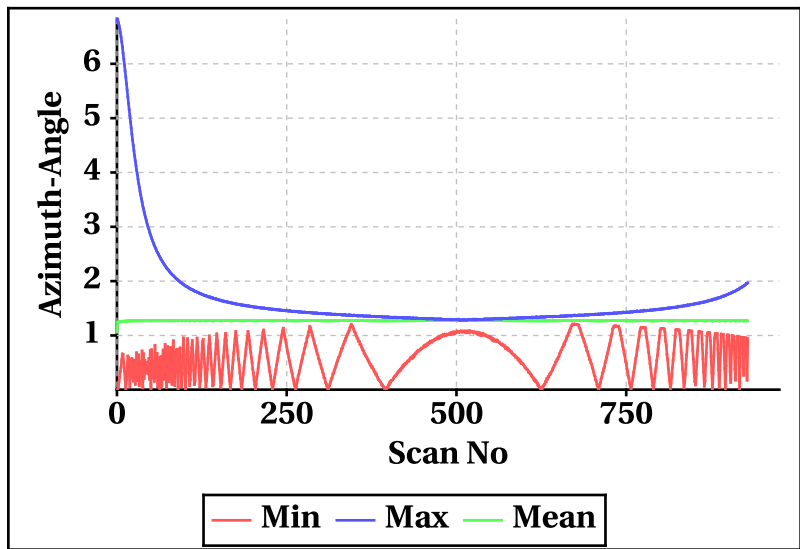


**Outer Beam(VV)**

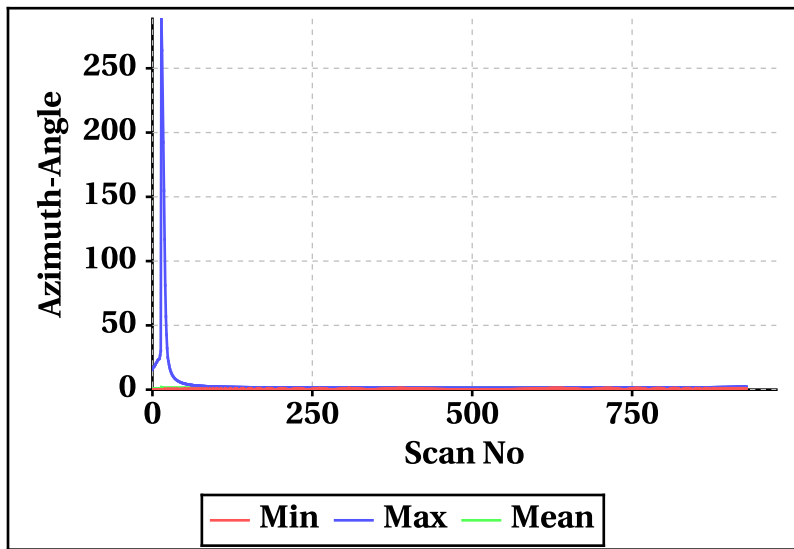


**Inner Beam (HH)**

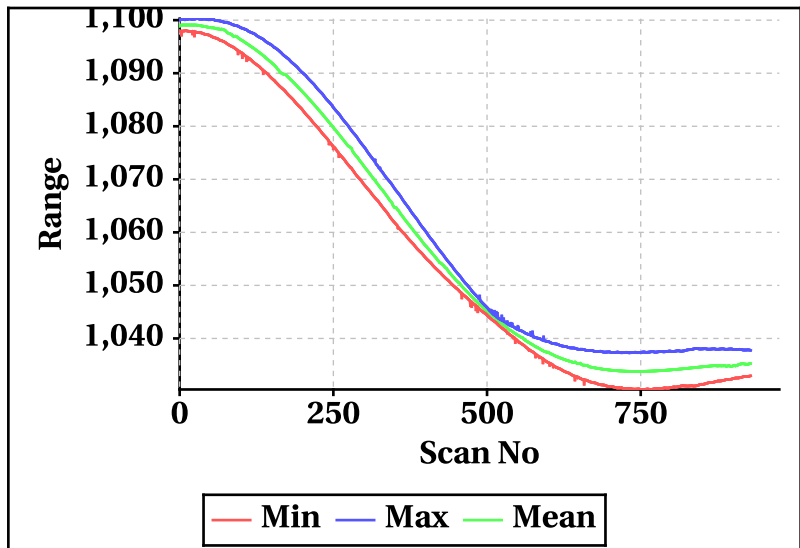


**Outer Beam(VV)**

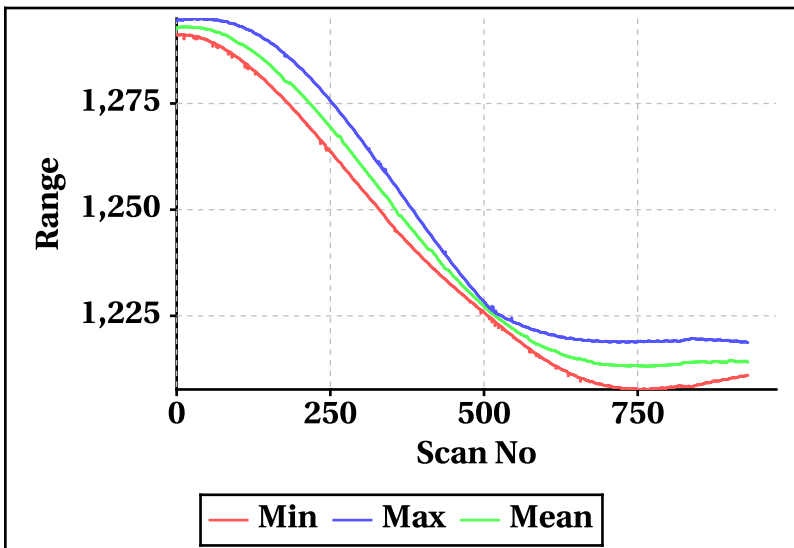

**Inner Beam (HH)**

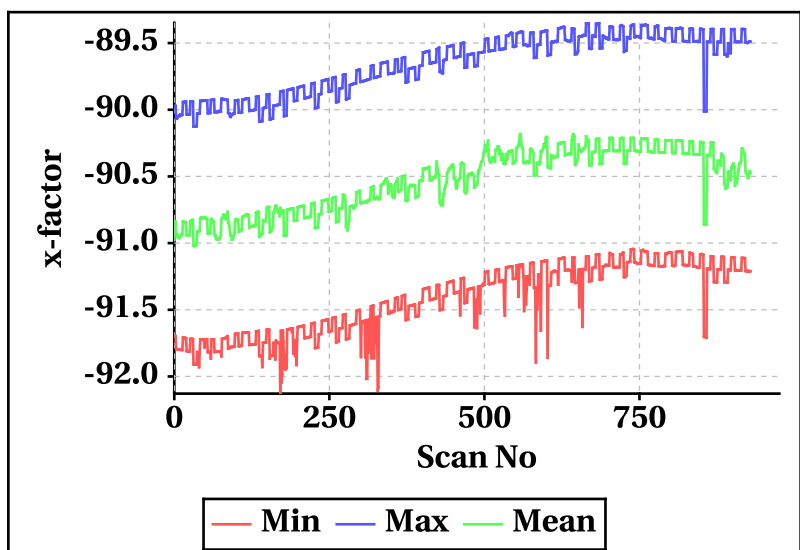

**Outer Beam(VV)**

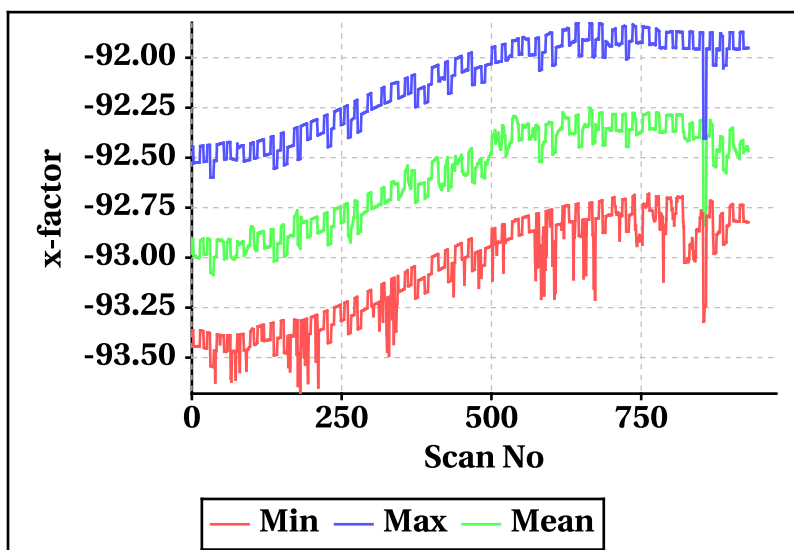


# Doppler Frequency Variation

**Doppler Frequency(KHz) variation statistics Over the half Orbit**

	Inner Beam (HH)	Outer Beam (VV)
<b>Min</b>	-469.06	-526.02
<b>Max</b>	472.20	528.82


**Footprint wise Doppler frequency variation Inner Beam (HH)**

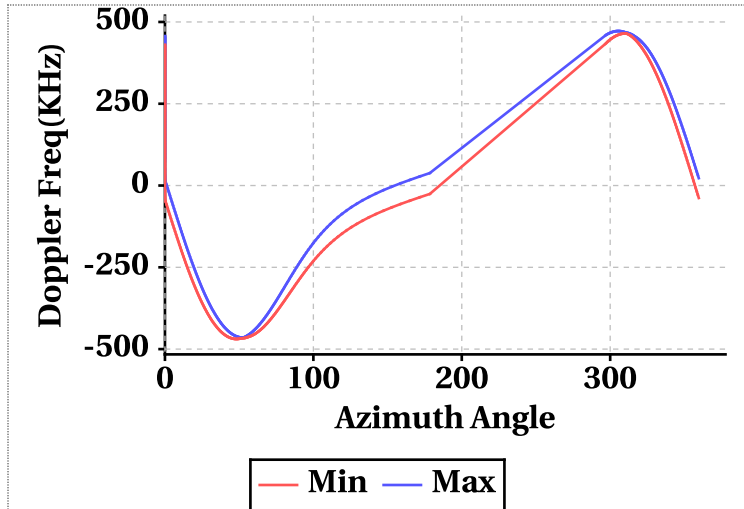


**Doppler Frequency(KHz) variation**

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	0.00	75.14	54.92	2.12	78.74	56.21
Doppler_70	464.58	469.18	467.58	520.62	525.94	524.16
Doppler_140	-48.52	12.20	-29.22	-61.24	7.24	-39.47
Doppler_210	-467.20	-464.56	-466.46	-523.54	-520.82	-522.62
Doppler_280	-15.32	48.56	28.29	-10.66	60.58	37.97


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)**

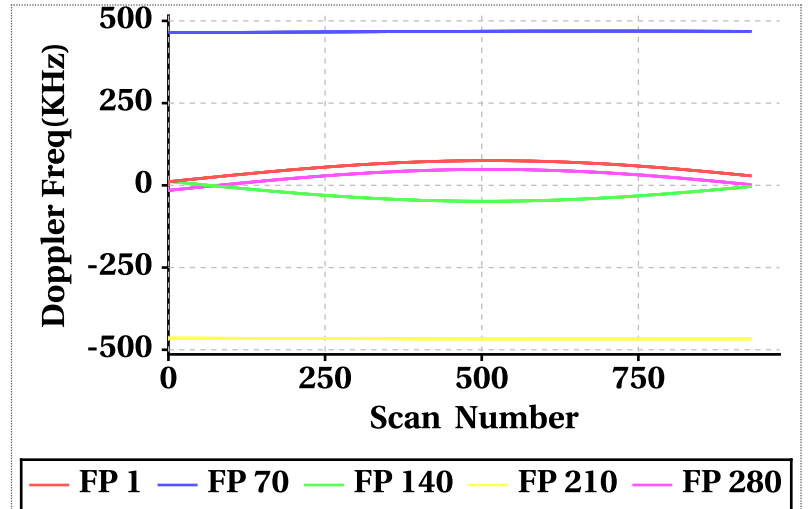

**Footprint wise Doppler frequency variation Outer Beam (VV)**

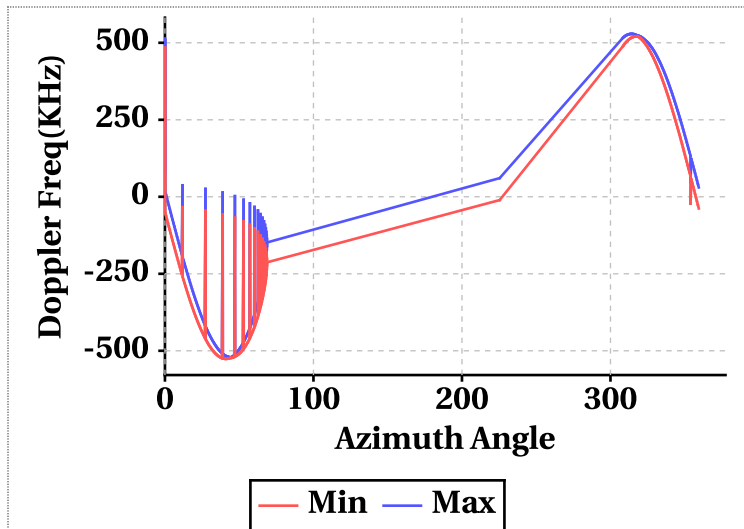


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)**

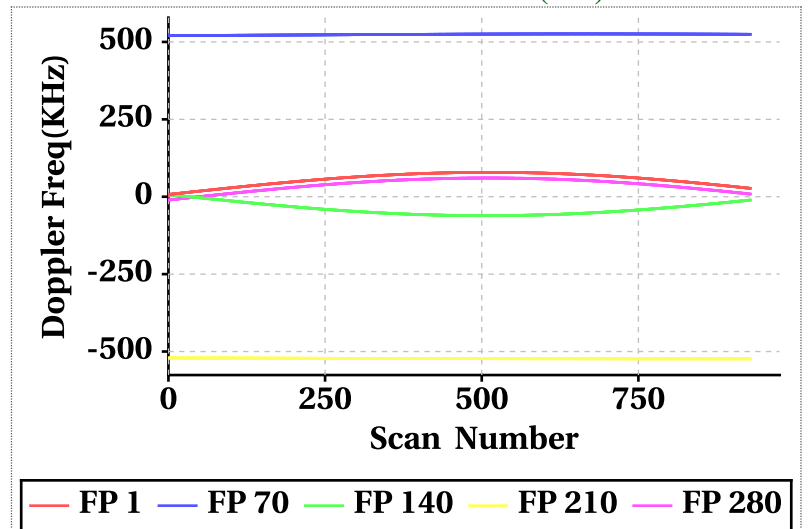


# Latitude Vs Doppler Frequency

**Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]**

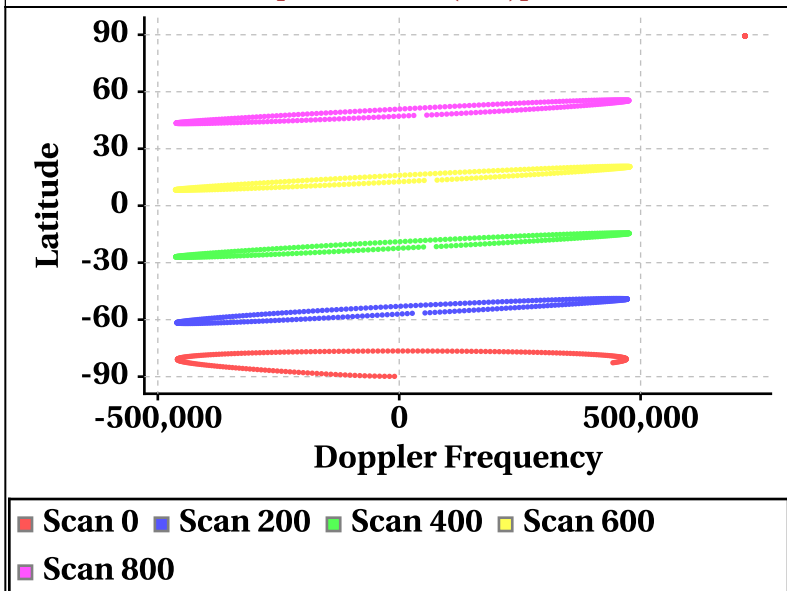


**Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]**

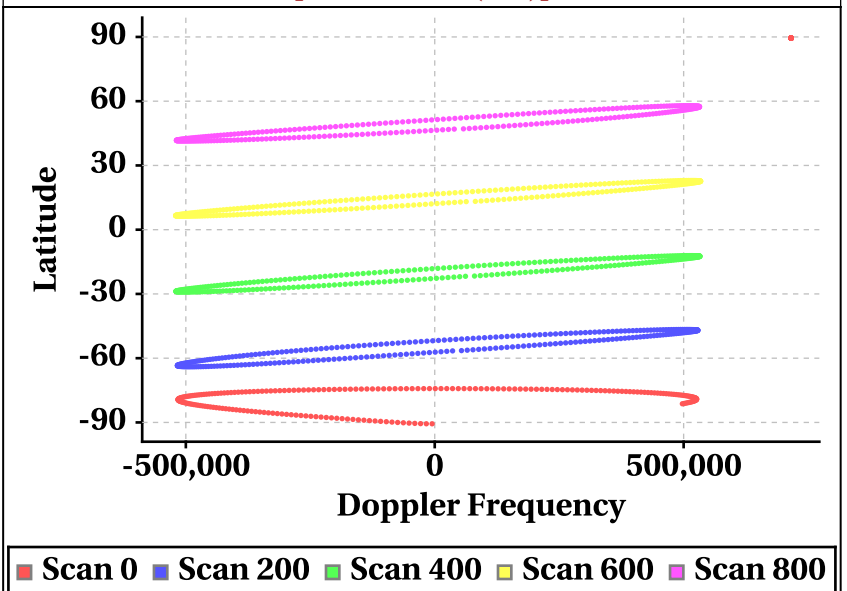


# Parameter as a function of Latitude

## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

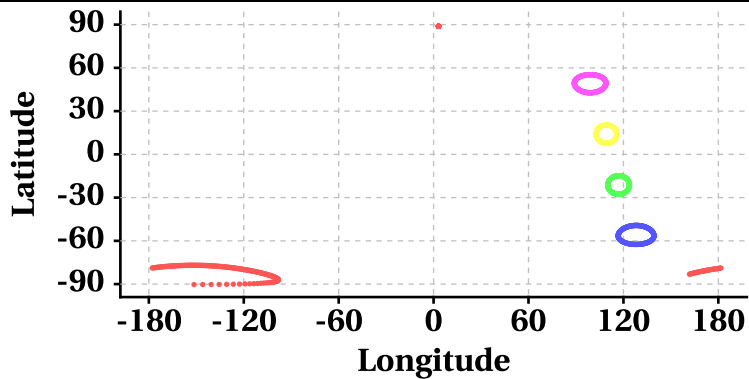


Scan Trace [Outer Beam (VV)]

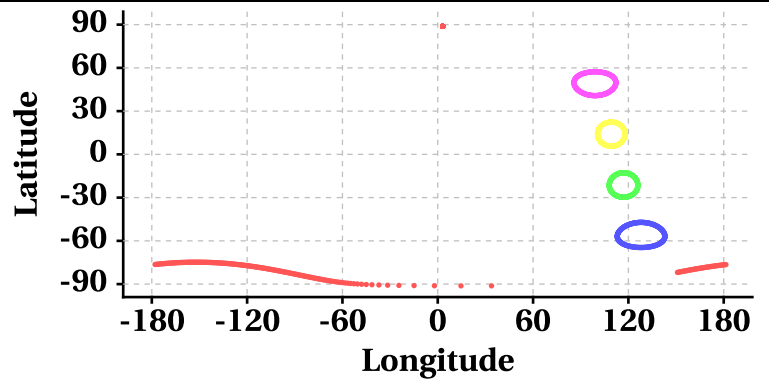


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

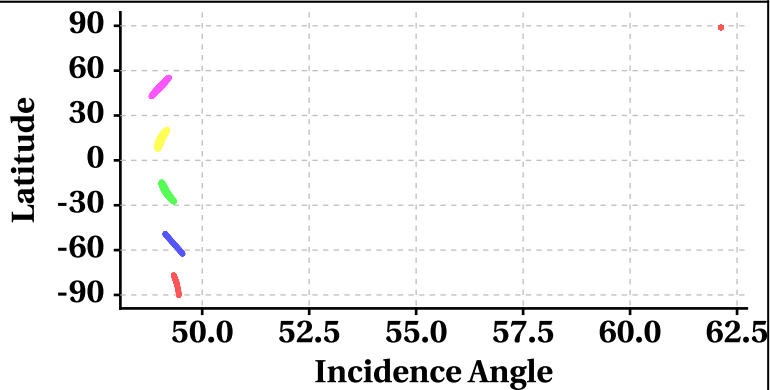


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

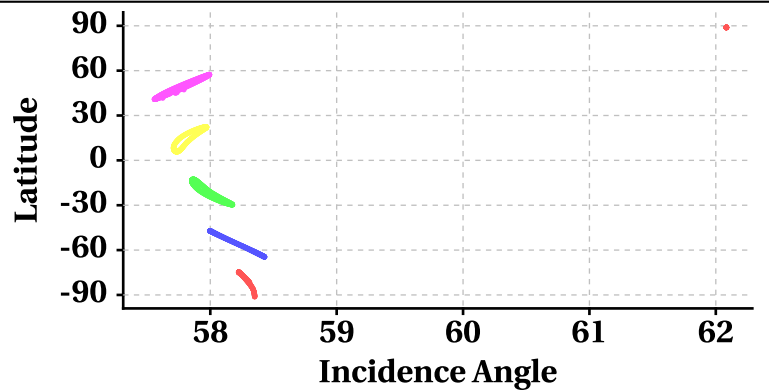


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

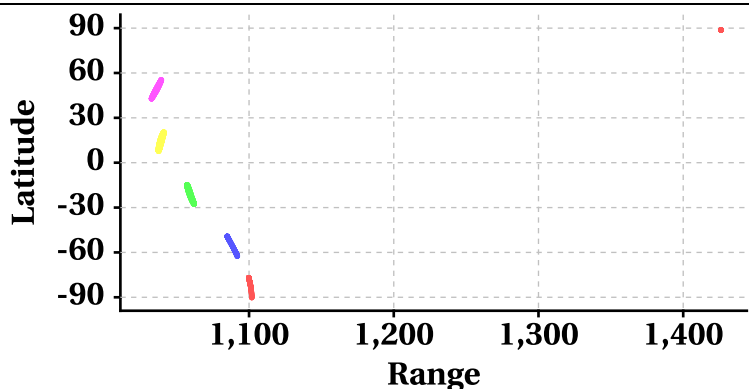

Range at Scan Interval of 200 [Outer Beam(VV)]

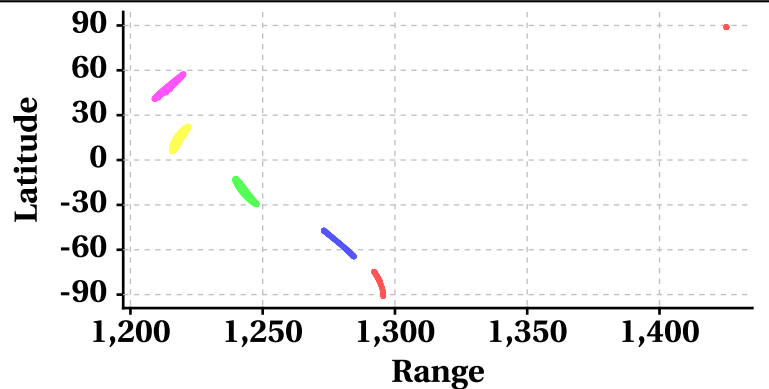

# Variation in Orbit and Attitude Parameters

