


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents


- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	18318	<b>Total Scans</b>	1016
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	18319	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	v1.1.4	<b>Rev. Number</b>	18318_18319	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	NS	<b>Data Production Date</b>	12-03-2020	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	12-03-2020	<b>Equator Crossing Time</b>	12:55:51.000	<b>No Of Outer Slices</b>	15


## Brightness Temperature(k) Footprint trace

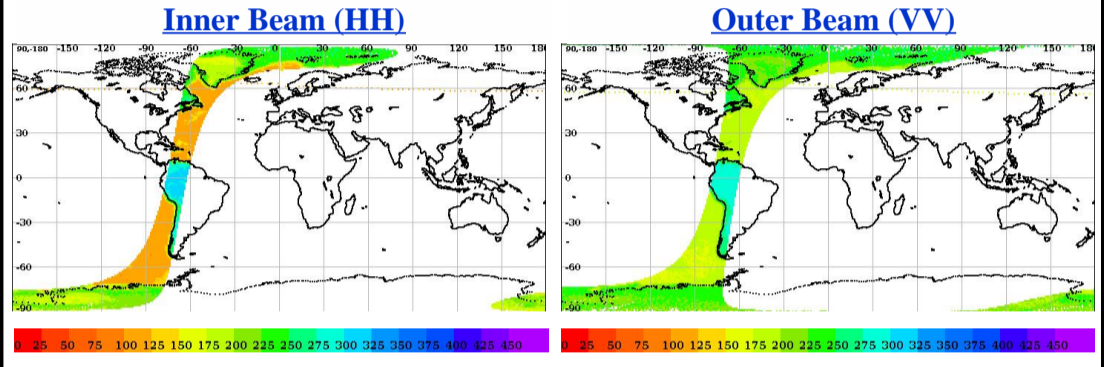

## Image Snapshot for Inner & Outer Beam

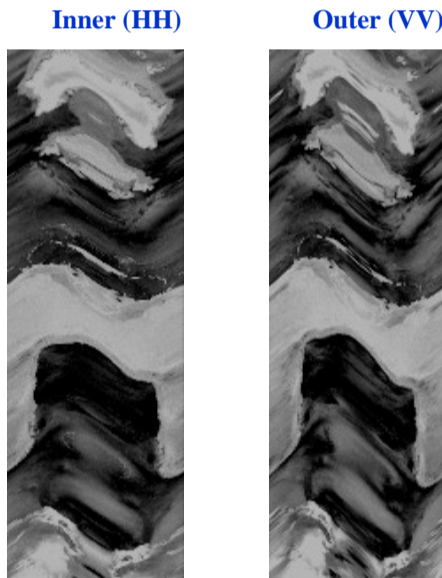

## Sigma0(dB) Footprint trace

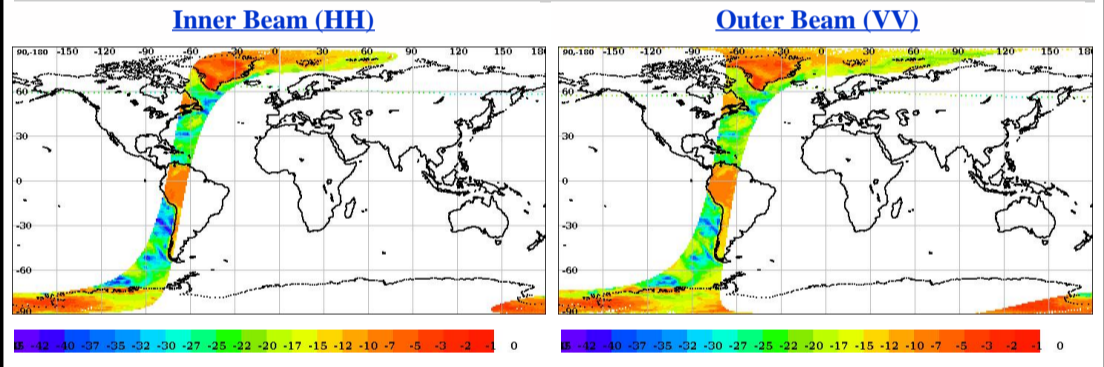


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.00	0.00
Data Not Available From Payload (%)	0.0	0.0
Slice not within sample array limits (%)	0.00	0.00
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	22.23	13.34
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	0.030117	0.072908


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

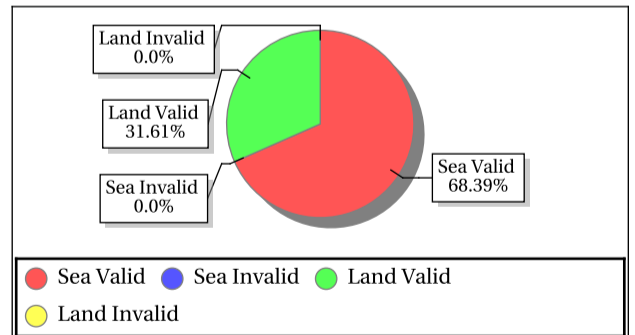

### Outer Beam (VV)

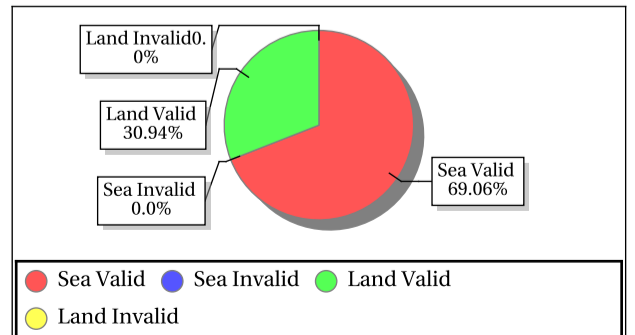

## Invariant Site Sigma-0 Statistics for Ascending/Descending, Fore/Aft in HH/VV beams

Site Name	Center Lat	Center Lon	Beam	Node	ScanDir	Sigma0 Min	Sigma0 Max	Sigma0 Mean	Sigma0 Std	BT Min	BT Max	BT Mean	BT Std
GreenLand_2	77.50	-41.50	Inner	DSC	Aft	-5.68	-4.46	-4.83	0.42	147.49	193.27	172.40	15.18
GreenLand_2	77.50	-41.50	Inner	DSC	Fore	-5.47	-3.96	-4.64	0.60	160.96	178.82	169.32	6.84
GreenLand_3	71.55	-42.45	Inner	DSC	Aft	-10.46	-7.81	-9.34	0.67	175.79	208.00	190.39	9.99
GreenLand_3	71.55	-42.45	Inner	DSC	Fore	-10.33	-8.37	-9.34	0.68	164.97	232.62	203.99	19.61
GreenLand_1	74.69	-42.50	Inner	DSC	Aft	-9.80	-7.63	-8.85	0.76	170.11	202.97	183.32	10.95
GreenLand_1	74.69	-42.50	Inner	DSC	Fore	-10.32	-7.90	-9.11	0.75	156.71	210.03	187.78	14.19
Amazon_1	0.00	-67.00	Inner	DSC	Aft	-8.59	-6.39	-7.62	0.58	257.92	337.54	307.55	18.05
Amazon_1	0.00	-67.00	Inner	DSC	Fore	-8.85	-6.16	-7.56	0.60	272.50	337.71	303.09	15.11
GreenLand_2	77.50	-41.50	Outer	DSC	Aft	-5.10	-4.59	-4.86	0.21	201.58	230.31	217.67	11.98
GreenLand_2	77.50	-41.50	Outer	DSC	Fore	-5.46	-4.40	-4.95	0.44	209.09	232.27	224.44	10.86
GreenLand_3	71.55	-42.45	Outer	DSC	Aft	-11.77	-10.45	-11.11	0.40	221.37	259.16	237.70	10.64
GreenLand_3	71.55	-42.45	Outer	DSC	Fore	-12.32	-9.78	-11.26	0.70	200.67	256.54	231.57	16.24
GreenLand_1	74.69	-42.50	Outer	DSC	Aft	-9.91	-7.21	-8.69	0.79	205.08	238.73	224.30	10.57
GreenLand_1	74.69	-42.50	Outer	DSC	Fore	-10.49	-7.77	-9.04	0.72	206.32	262.82	233.49	16.62
Amazon_2	-3.00	-61.00	Outer	DSC	Aft	-11.15	-8.72	-9.93	0.50	245.72	318.88	284.67	15.66
Amazon_2	-3.00	-61.00	Outer	DSC	Fore	-11.55	-8.60	-9.99	0.52	240.27	338.62	283.26	17.93
Amazon_1	0.00	-67.00	Outer	DSC	Aft	-9.88	-7.54	-8.98	0.58	246.54	330.16	293.01	18.38
Amazon_1	0.00	-67.00	Outer	DSC	Fore	-10.09	-7.70	-8.71	0.64	245.34	322.33	288.10	18.57



## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.12	224.29	0.34	3.024	0.12	276.61	0.31	2.478	0.12	0.16	0.12	0.000	0.12	0.31	0.12	0.000
<b>Kpa</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-33.64	26.70	4.91	0.477	-34.55	27.59	4.97	0.569	2.78	28.84	19.45	16.949	-3.32	29.91	20.34	31.848

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.09	187.17	0.26	2.255	0.09	216.12	0.27	2.072	0.09	0.15	0.09	0.000	0.09	0.48	0.09	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.02	22.77	2.87	0.007	-34.65	20.91	2.78	0.000	0.16	22.73	13.68	0.088	-7.43	23.51	14.20	0.674

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)


	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.69	49.30	49.01	0.000	57.47	58.14	57.87	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0027	267.47	1.28	2.628	0.0000	294.07	1.27	3.881	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1032.00	1076.15	1050.23	0.000	1208.91	1263.89	1230.08	1.447	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.40	-89.62	-90.15	0.000	-92.83	-91.66	-92.01	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	15.84	16.40	16.03	0.000	20.87	22.75	21.11	2.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.78	1799.97	25.11	4.000	18.39	1964.07	25.97	4.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00

- Normal
- Deviations
- Alarming
- High Errors




## Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

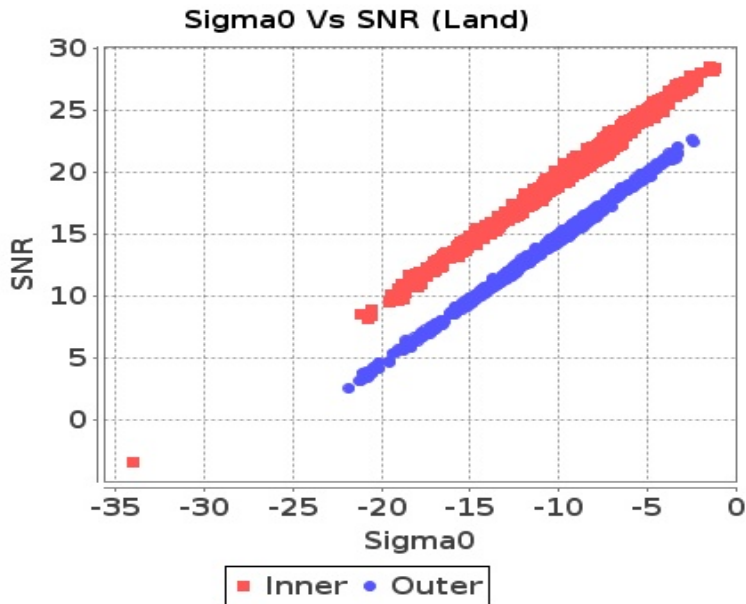


Footprint-Sea

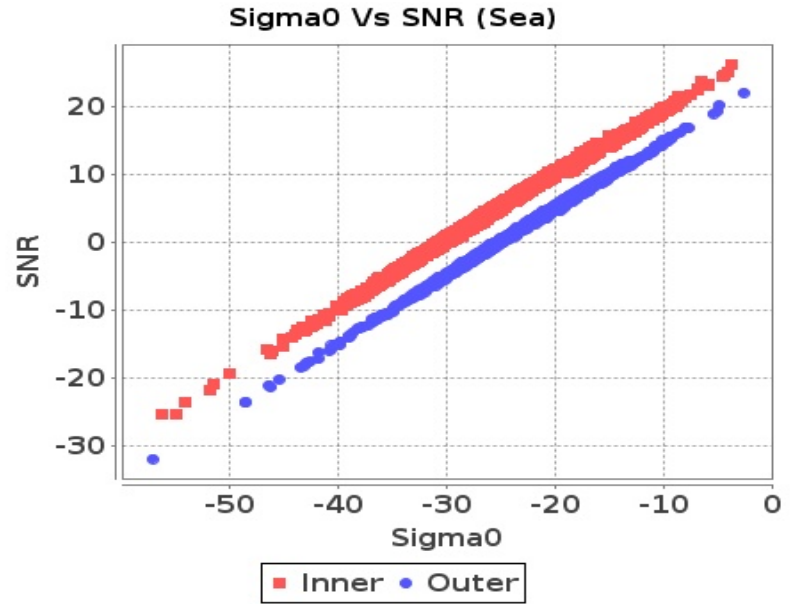

Slice-Land

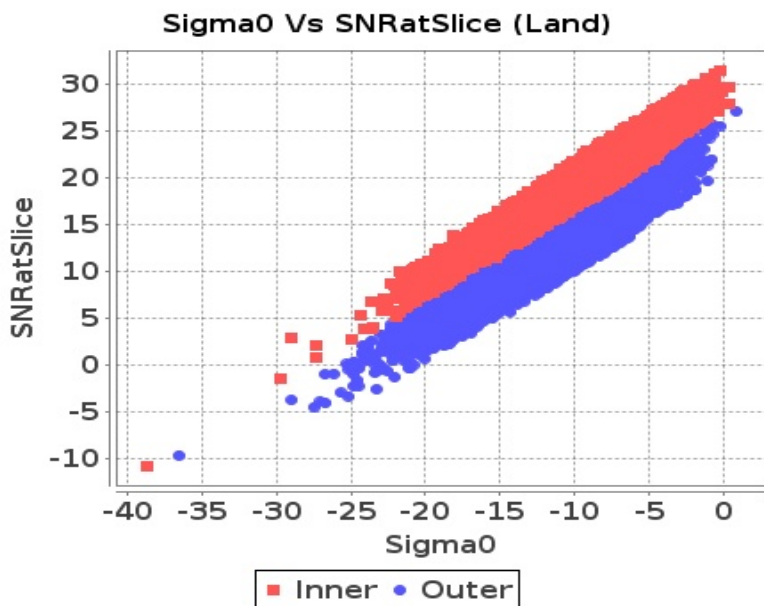


Slice-Sea

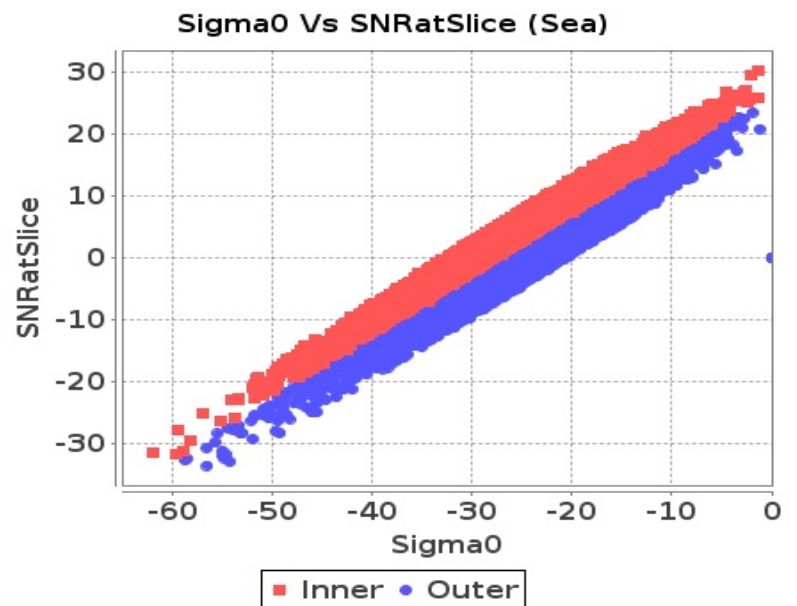


## Sigma0 Behaviour (Kp Vs SNR)

Slice

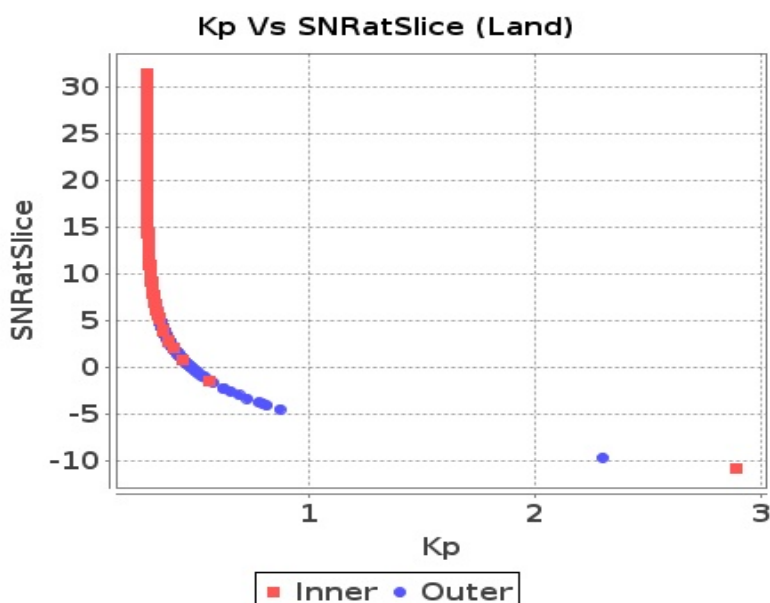


Slice

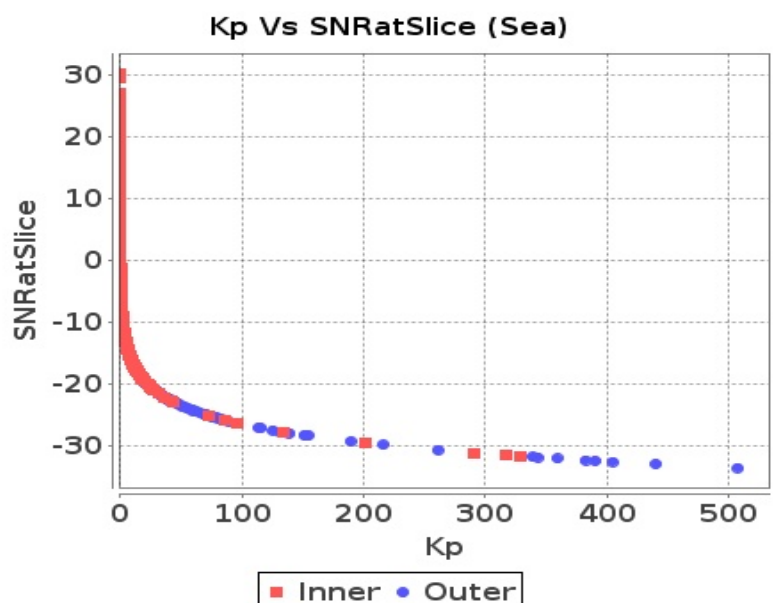

# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

### Sigma0 Vs Kp (Land)

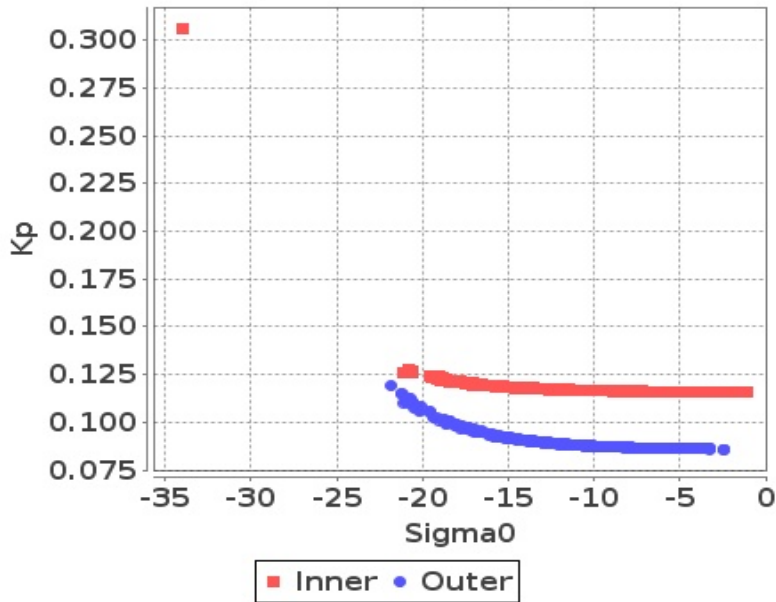


## Footprint-Sea

### Sigma0 Vs Kp (Sea)

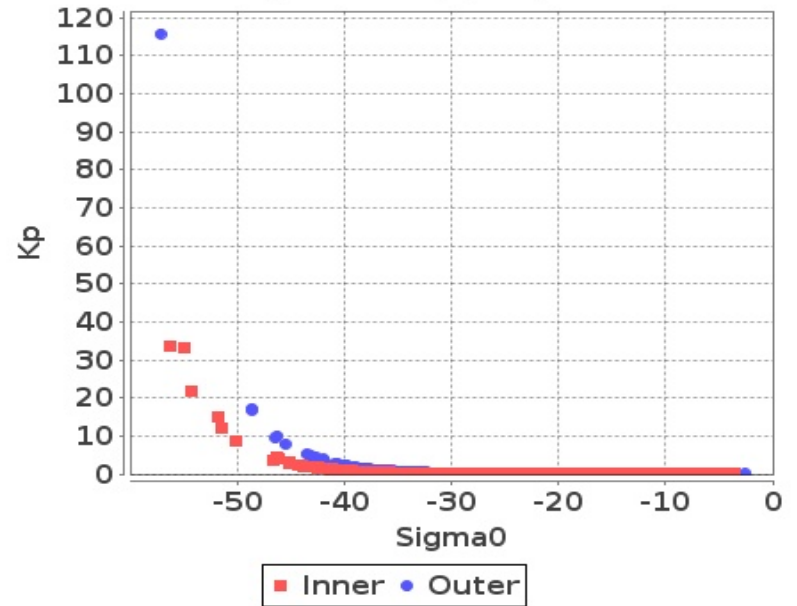


## Slice-Land

### Sigma0 Vs KpatSlice (Land)

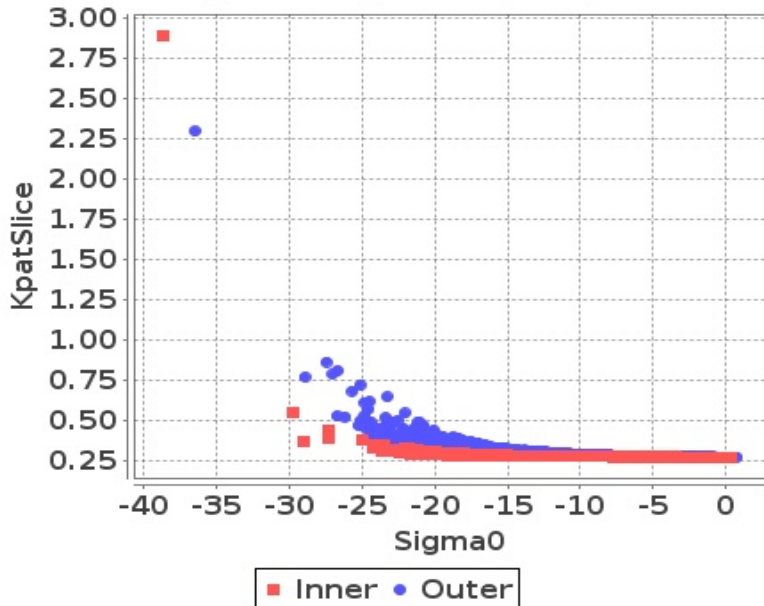

## Slice-Sea

### Sigma0 Vs KpatSlice (Sea)




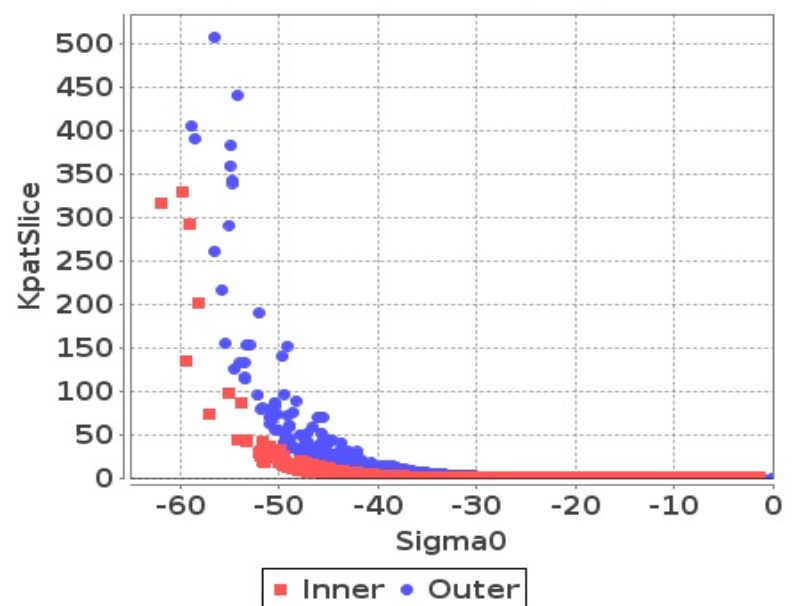


# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-26	-33	-63	-65
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-25	-32	-58	-59
Max	0	0	0	0

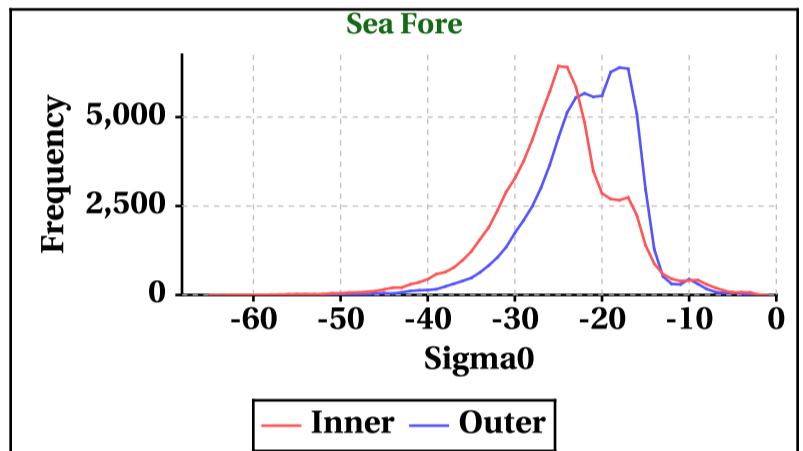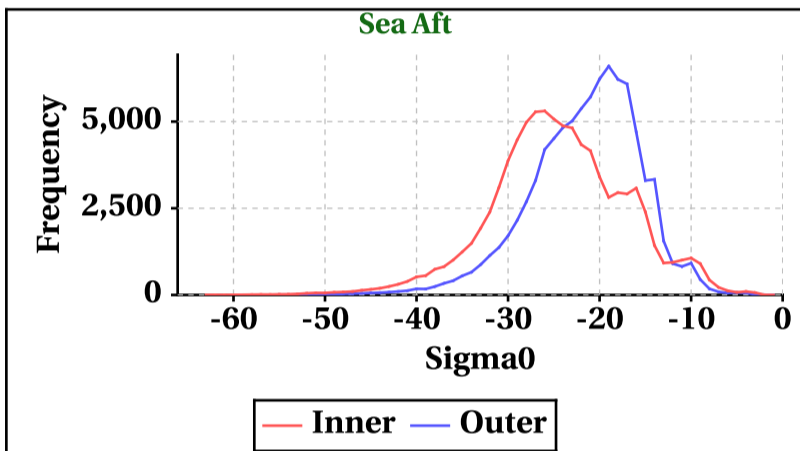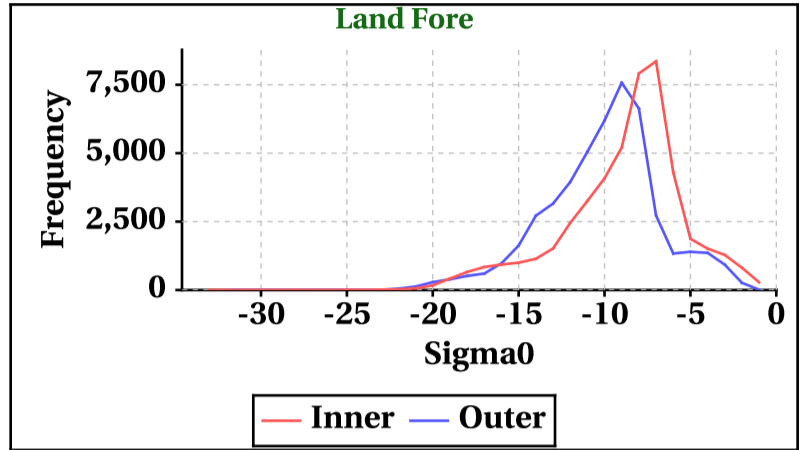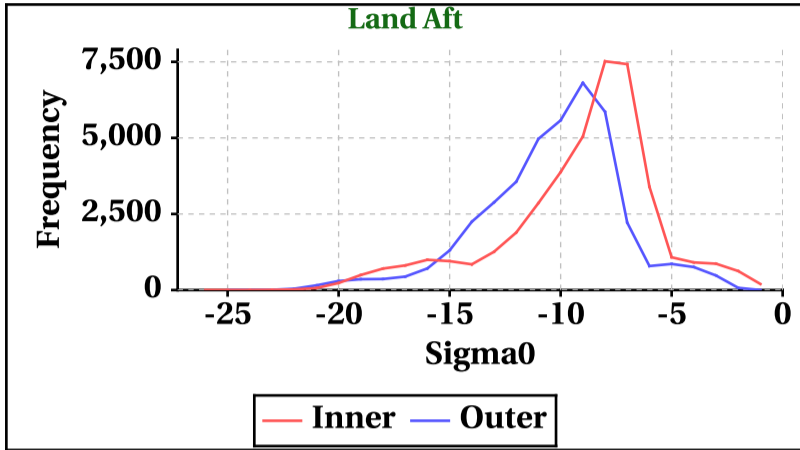

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	377	373	294	298

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	362	355	304	301

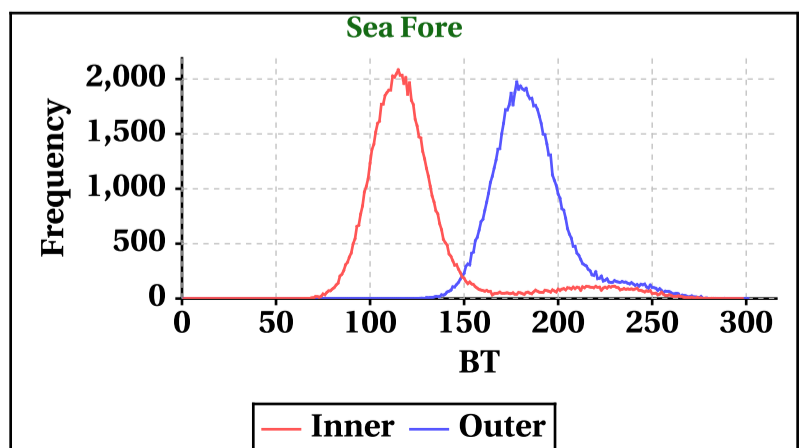
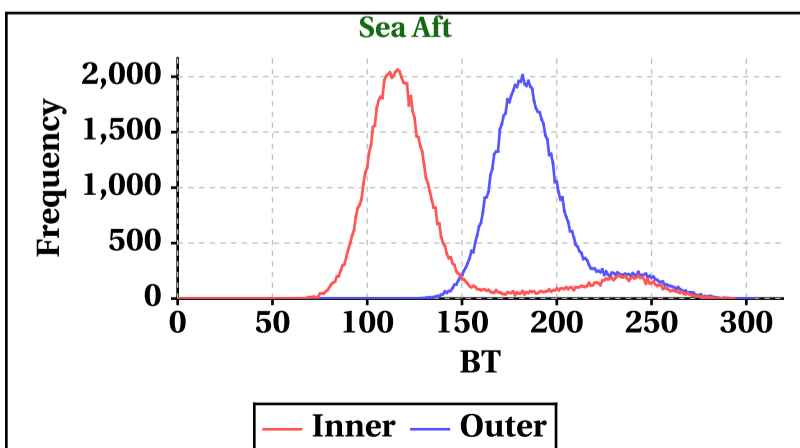
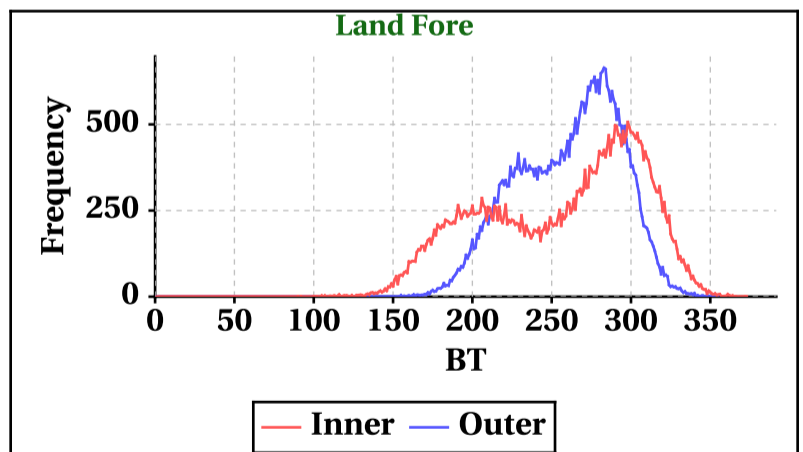
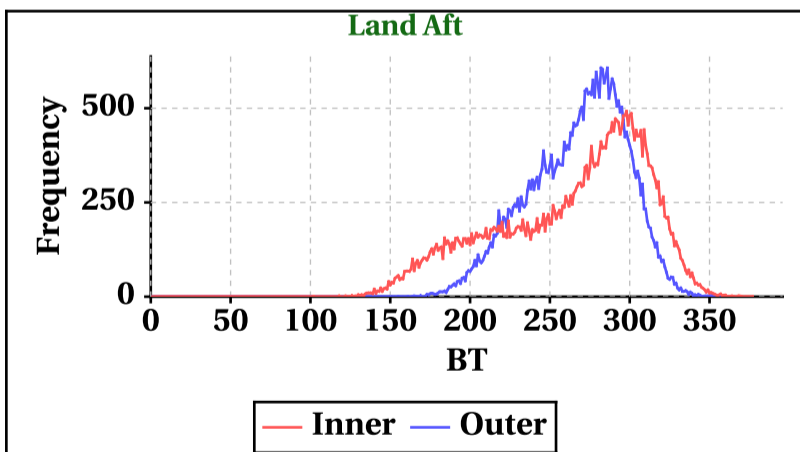


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	-3	-33	-34
Max	28	29	26	27

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	-7	-34	-34
Max	22	23	22	20

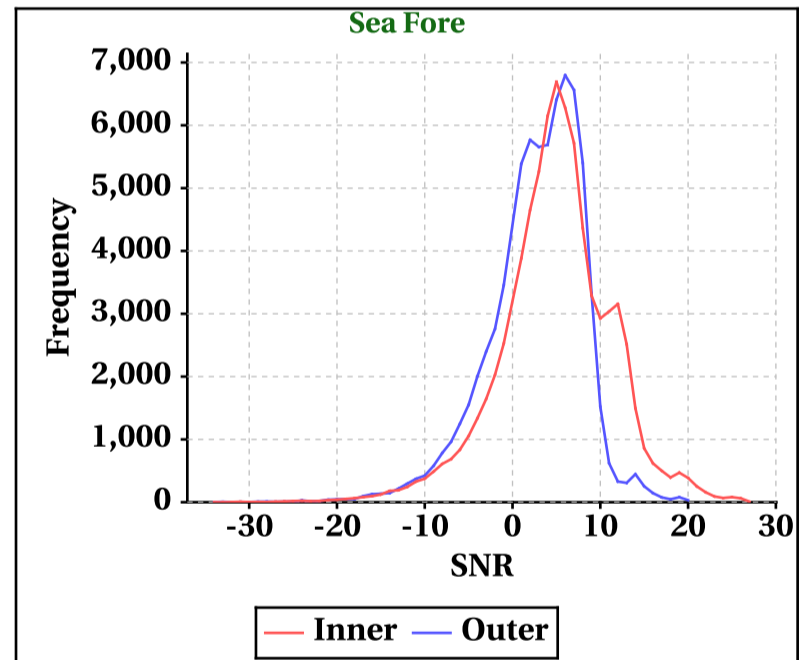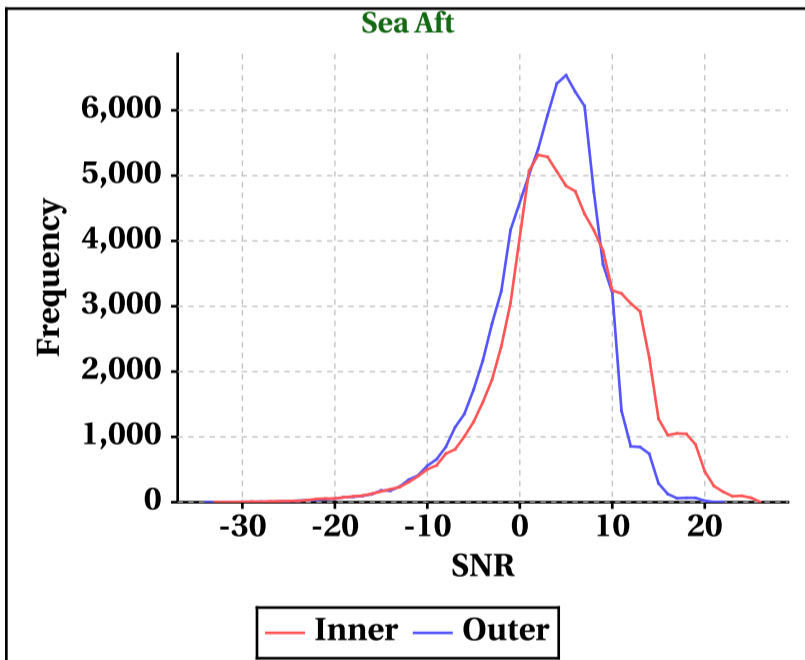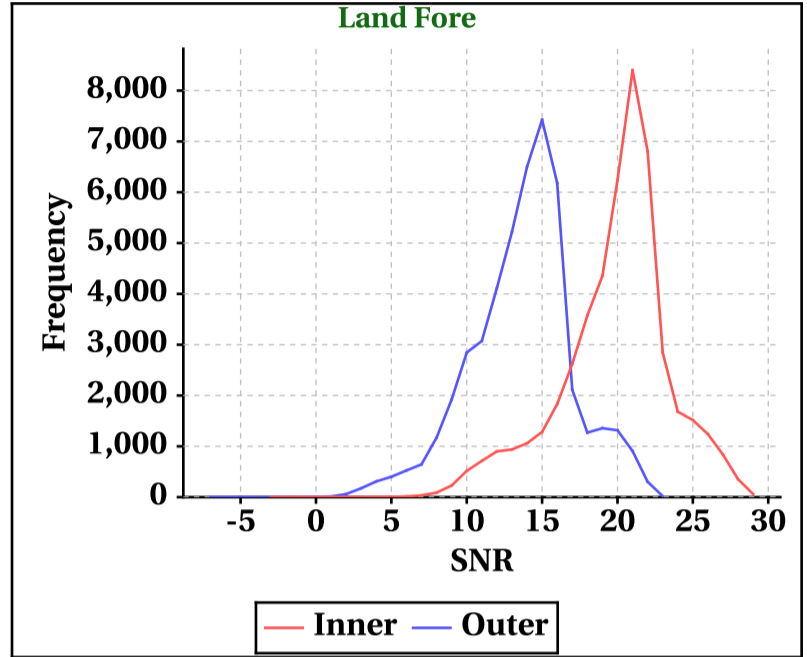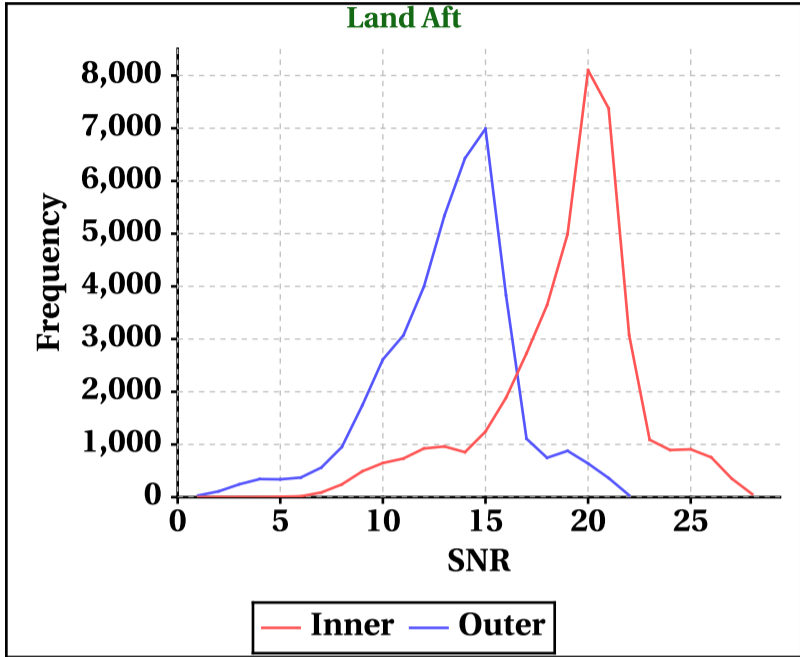


## Orbit-wise behaviour of SNR

Inner Beam (HH)

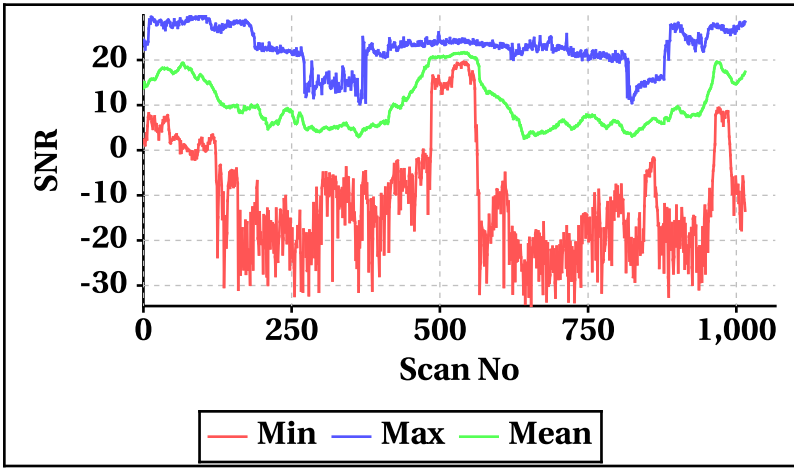


Outer Beam(VV)

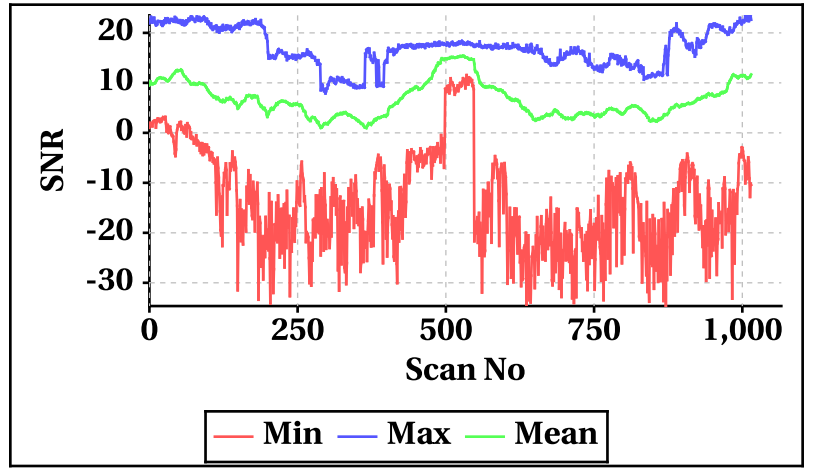


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

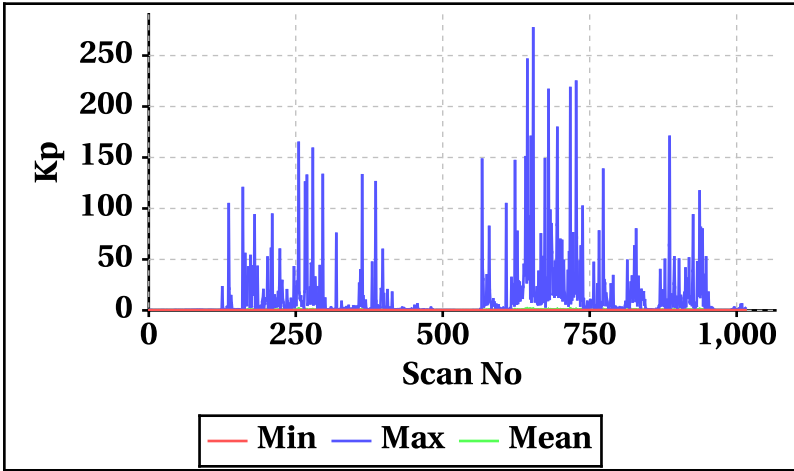


Outer Beam(VV)

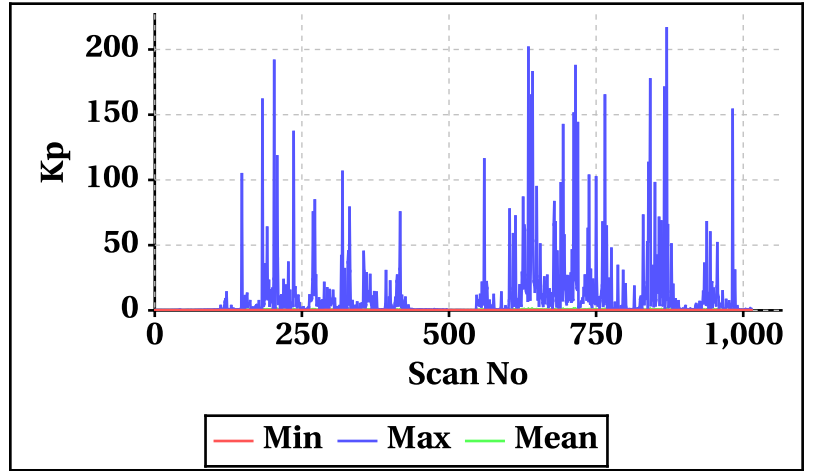


Inner Beam(HH)

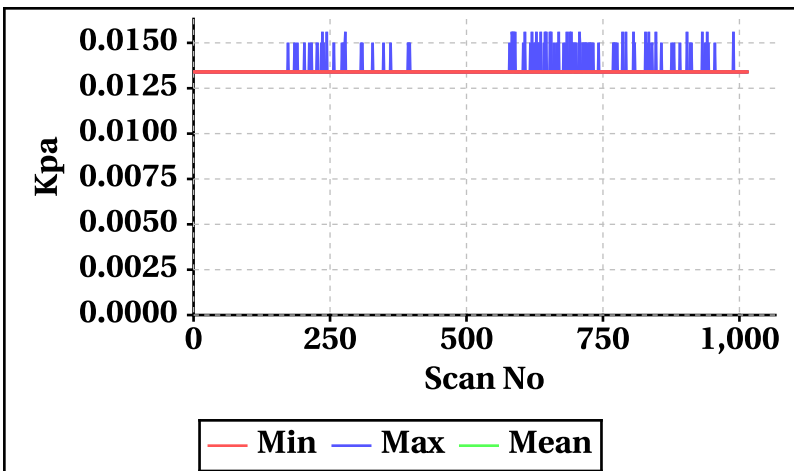


Outer Beam(VV)

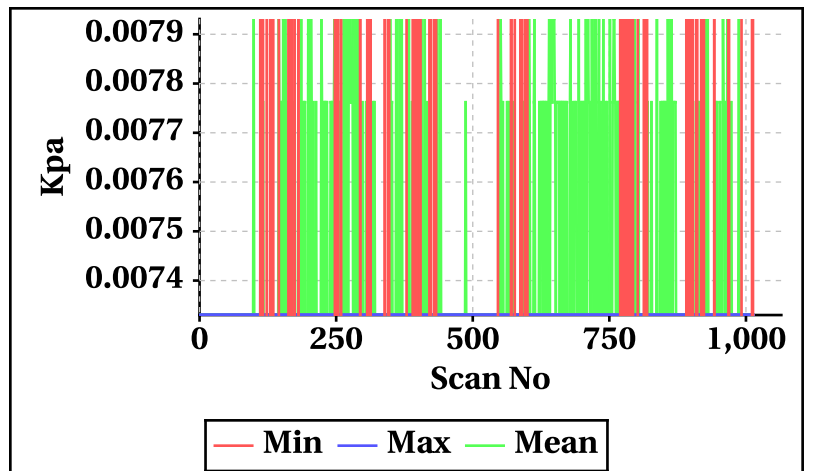


Inner Beam(HH)

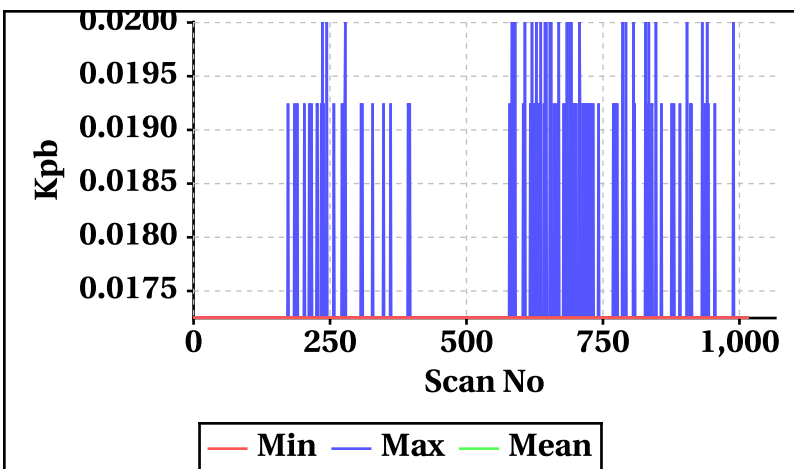


Outer Beam(VV)

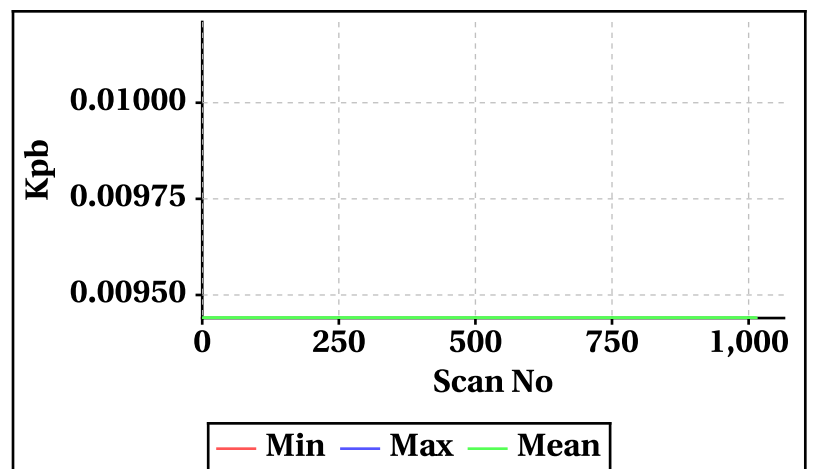

Inner Beam(HH)

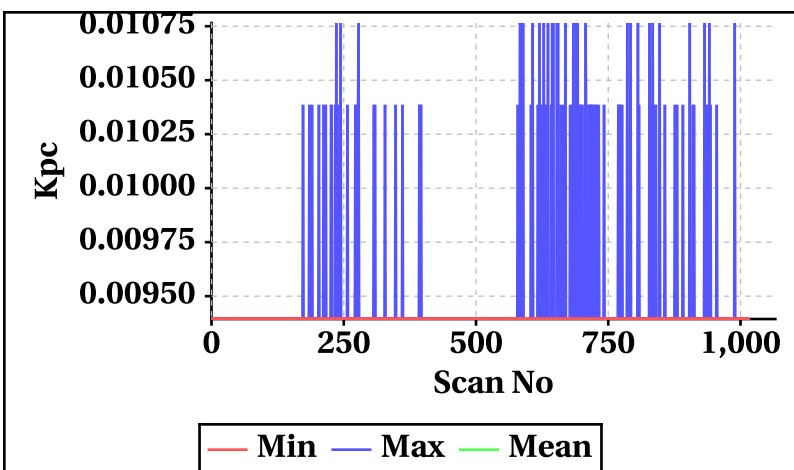


Outer Beam(VV)

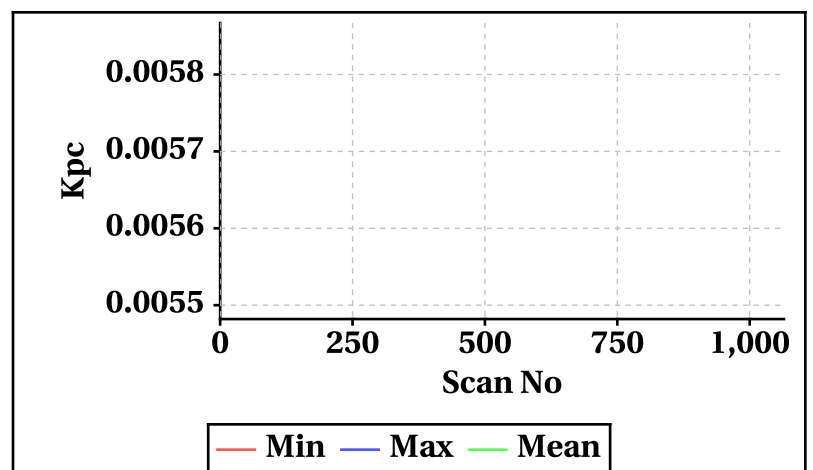




Orbit-wise behaviour of Incidence,Azimuth,Range,X-Factor


Inner Beam (HH)

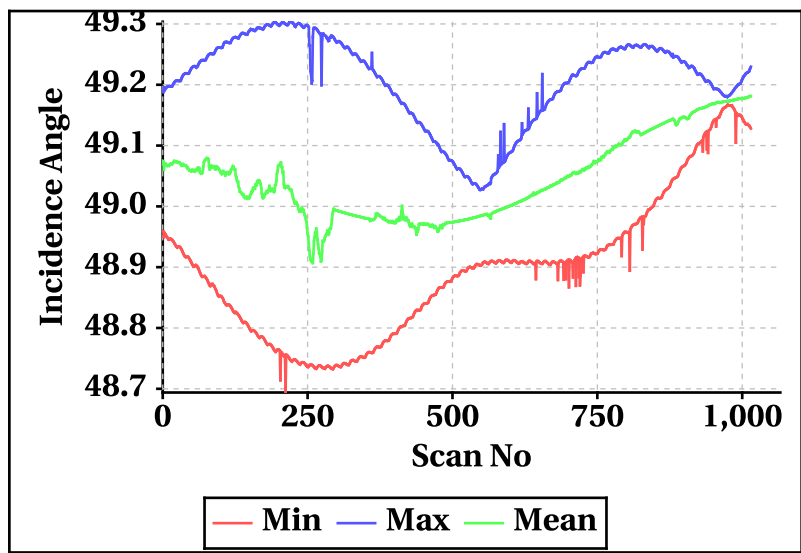


Outer Beam(VV)

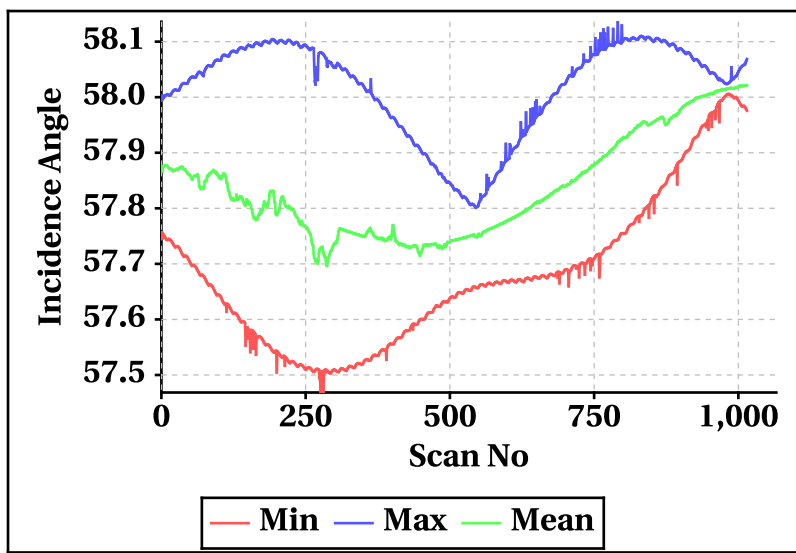


Inner Beam (HH)

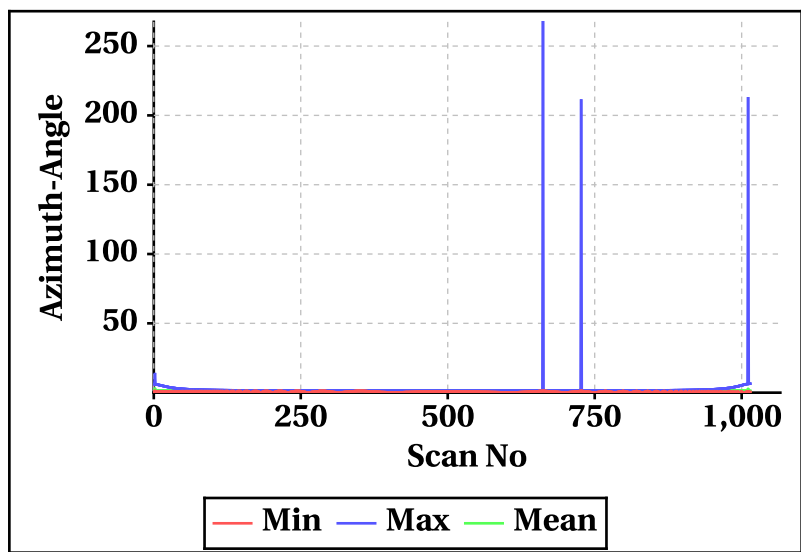


Outer Beam(VV)

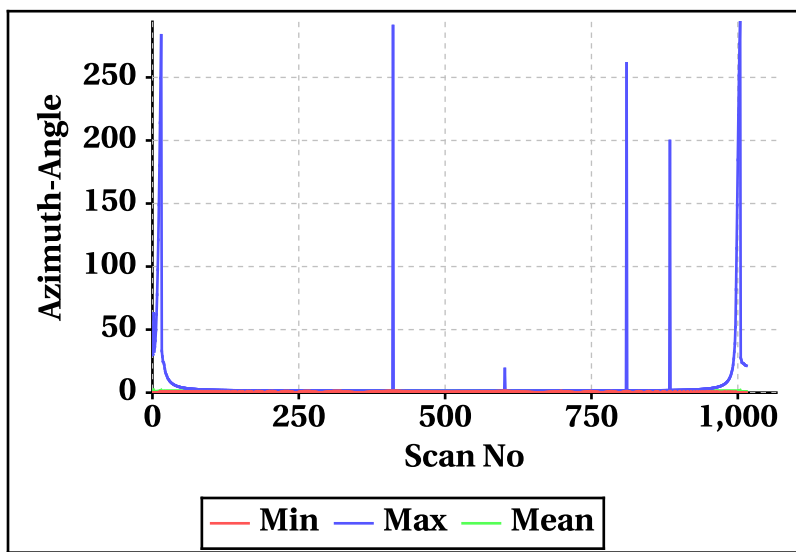


Inner Beam (HH)

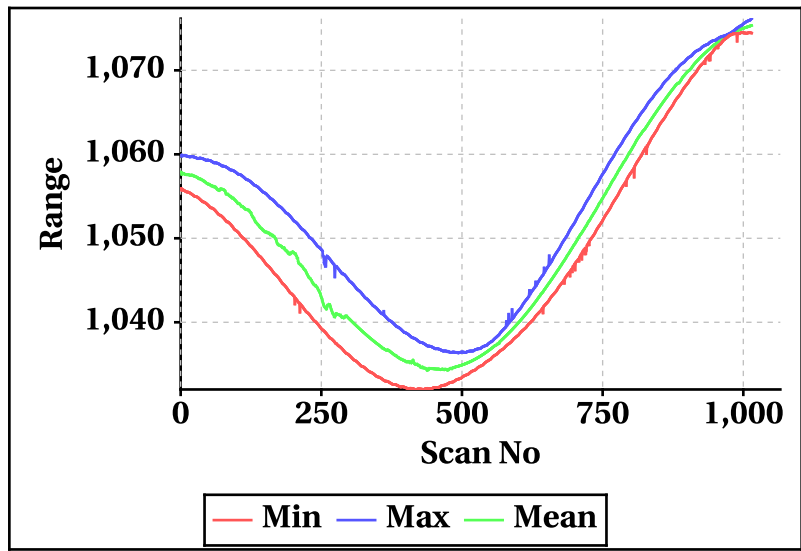


Outer Beam(VV)

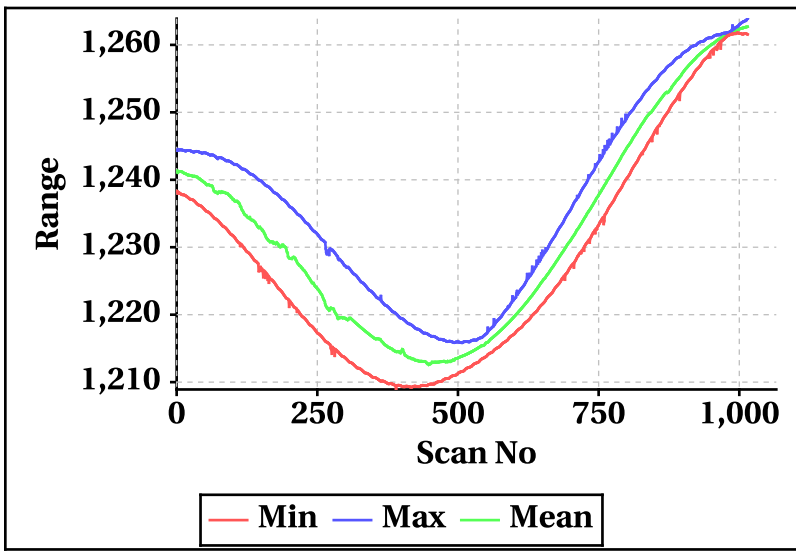

Inner Beam (HH)

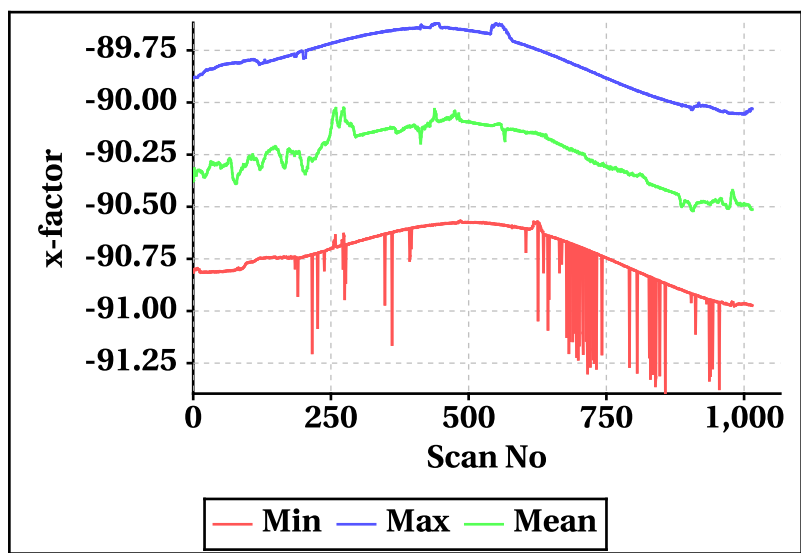

Outer Beam(VV)

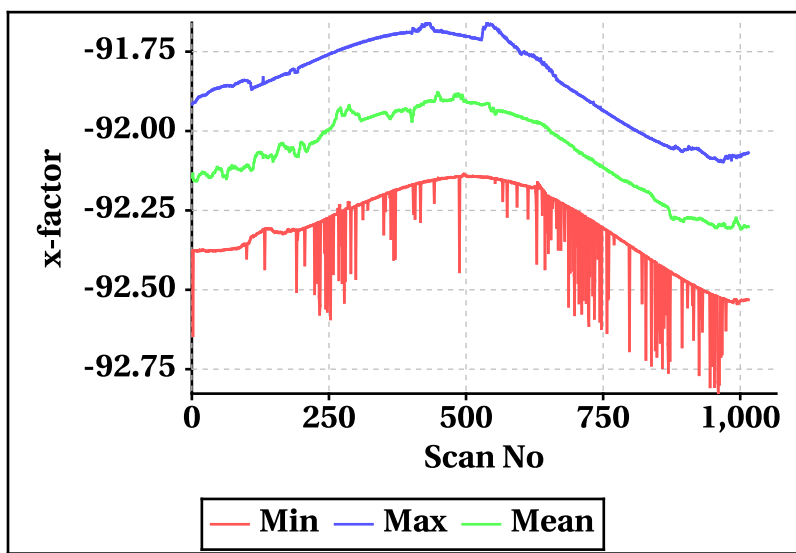


# Doppler Frequency Variation

Doppler Frequency(KHz) variation statistics Over the half Orbit

	Inner Beam (HH)	Outer Beam (VV)
Min	-464.18	-520.04
Max	462.74	518.74


Footprint wise Doppler frequency variation Inner Beam (HH)

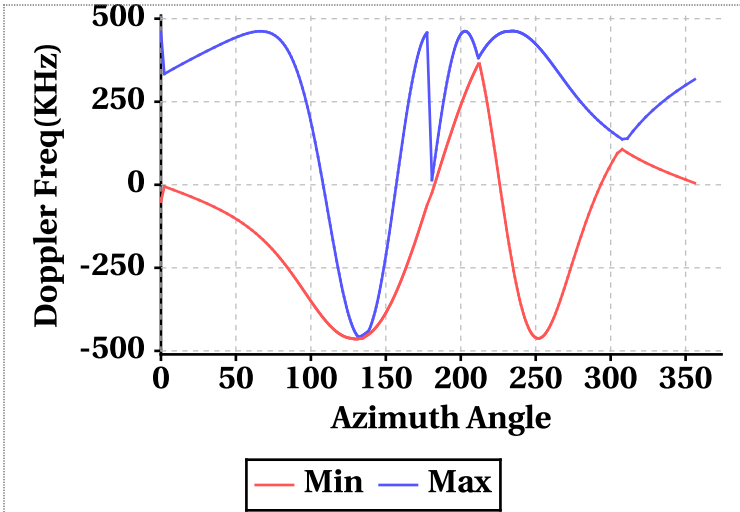


Doppler Frequency(KHz) variation

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	-24.42	14.46	-12.89	-32.86	3.38	-19.98
Doppler_70	-156.22	461.92	460.42	-162.86	517.56	515.76
Doppler_140	15.38	300.14	35.52	11.52	346.22	34.10
Doppler_210	-461.72	-405.50	-461.08	-517.68	-460.54	-517.12
Doppler_280	-50.96	460.22	-38.82	-51.10	516.80	-37.53


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)

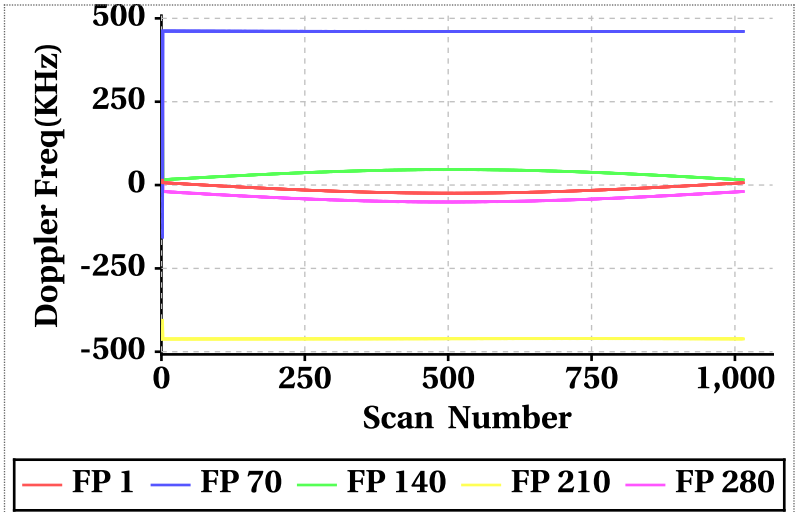

Footprint wise Doppler frequency variation Outer Beam (VV)

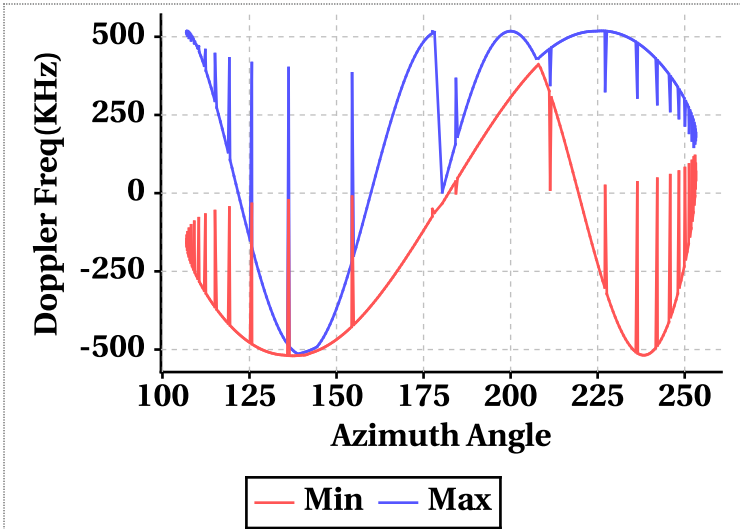


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)

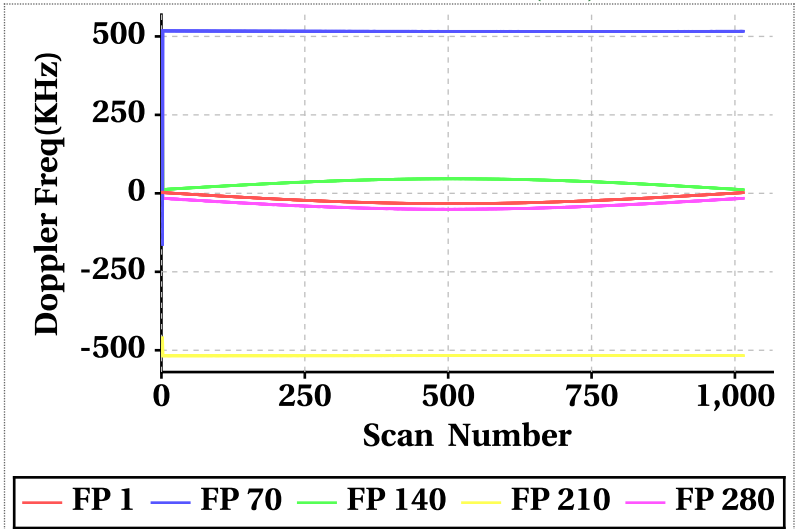


# Latitude Vs Doppler Frequency

Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]

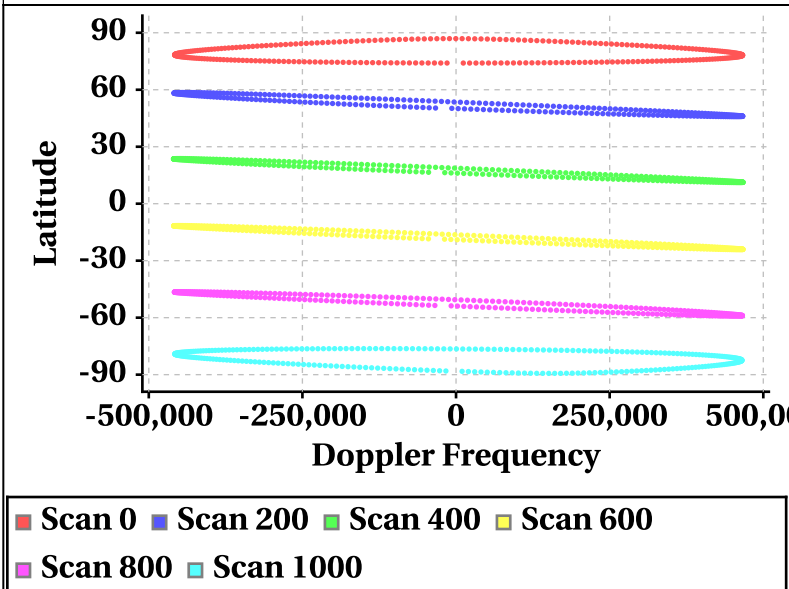


Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]

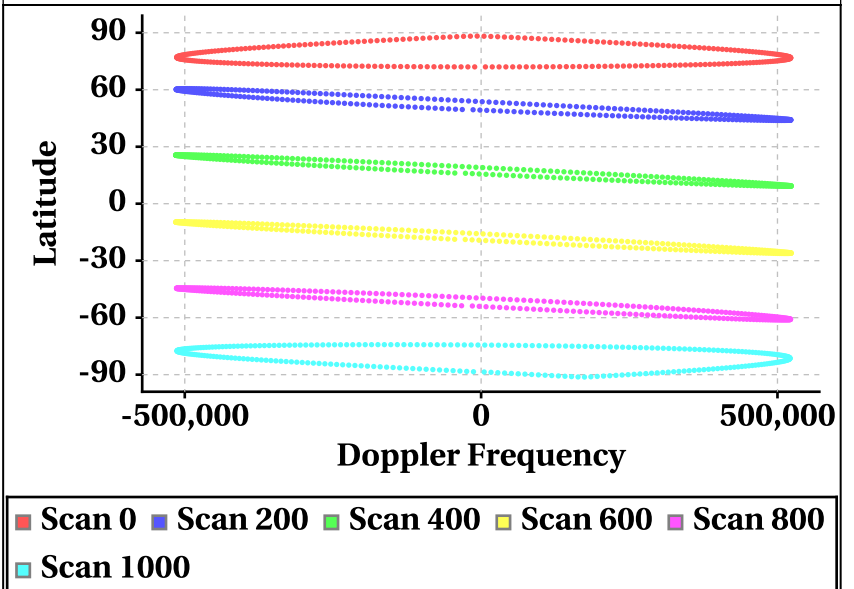

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

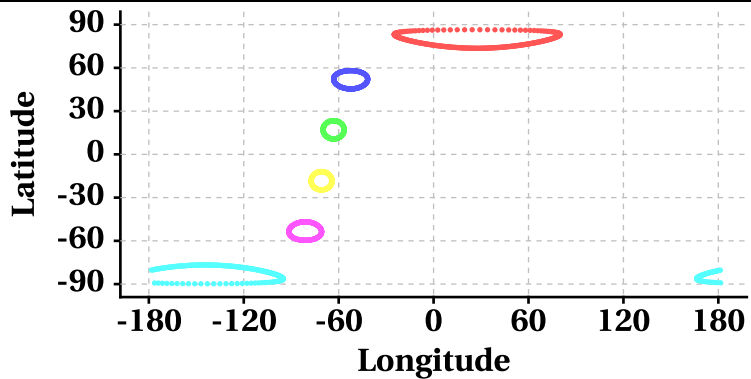

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Scan Trace [Outer Beam (VV)]

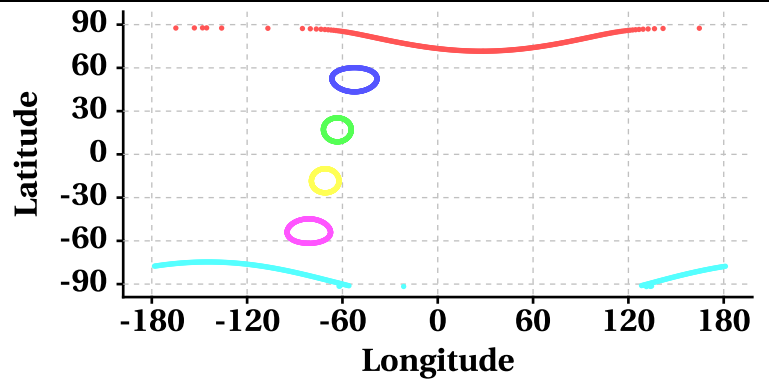

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

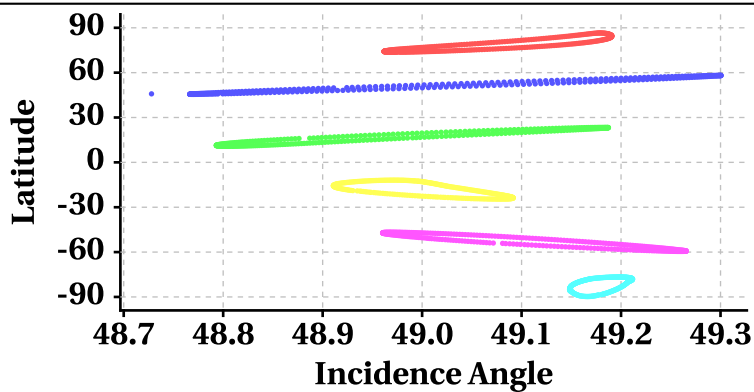

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

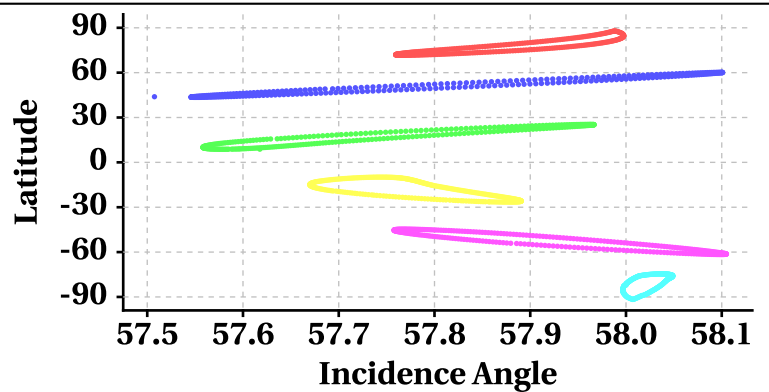

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

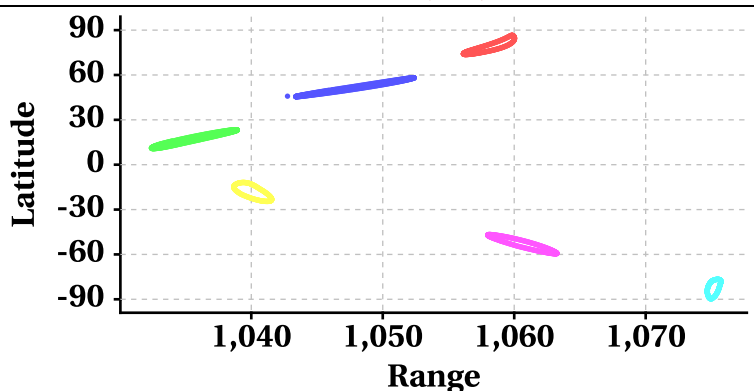

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

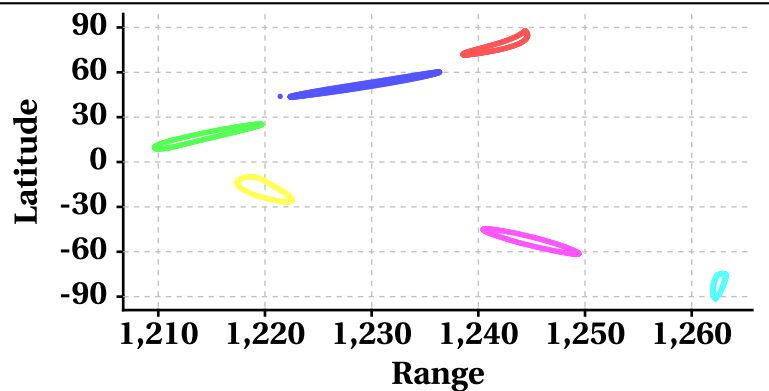

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000



# Variation in Orbit and Attitude Parameters

