

SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

Table of Contents

- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

Satellite Id	ScatSat-1	Start Orbit	12901	Total Scans	1016
Sensor Name	Scatterometer	End Orbit	12902	No of Inner FootPrints	281
Processor Version	v1.1.3	Rev. Number	12901_12902	No Of Outer FootPrints	282
Half Orbit Direction	SN	Data Production Date	05-03-2019	No. Of Inner Slices	9
Equator Crossing Date	04-03-2019	Equator Crossing Time	23:57:35.000	No Of Outer Slices	15

Brightness Temperature(k) Footprint trace



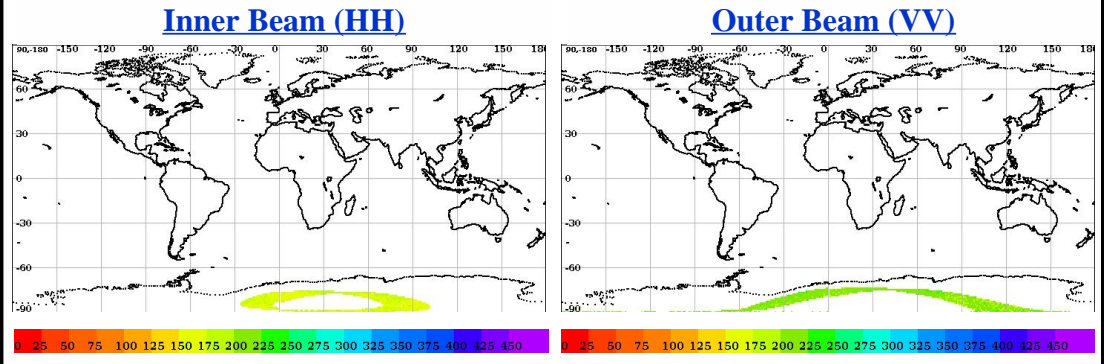


Image Snapshot for Inner & Outer Beam

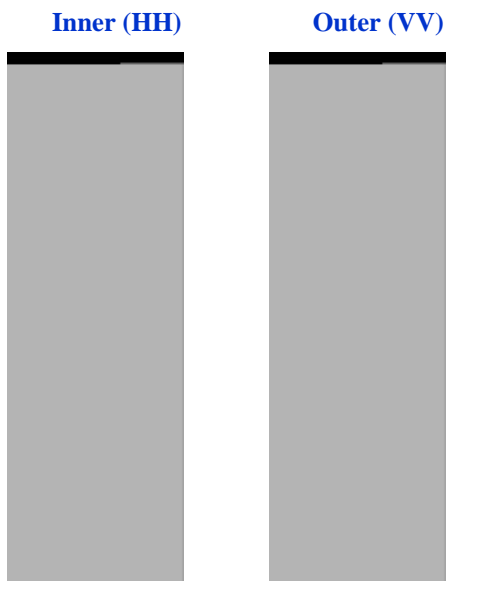

Sigma0(dB) Footprint trace


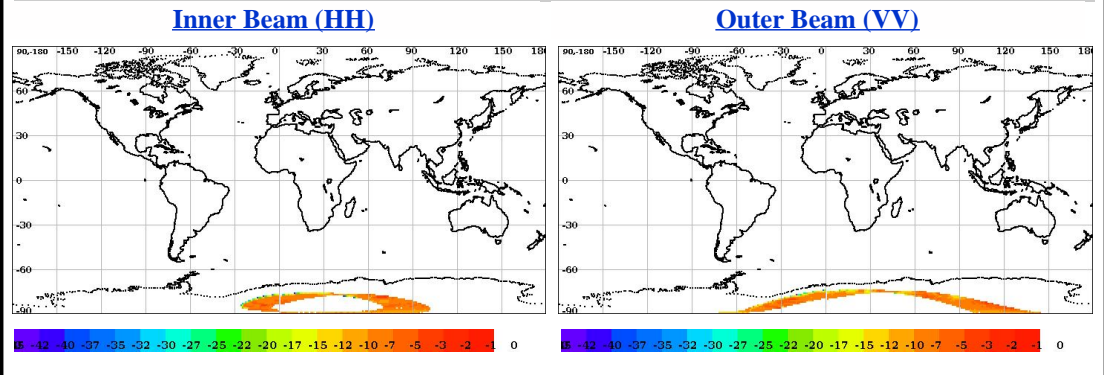


Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	97.80	97.80
Data Not Available From Payload (%)	99.97118	99.96969
Slice not within sample array limits (%)	0.03	0.03
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	0.50	0.30
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	0.007736	0.0

*DP Format Document

Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

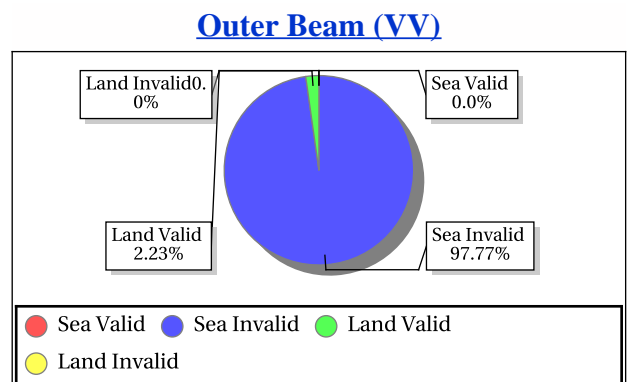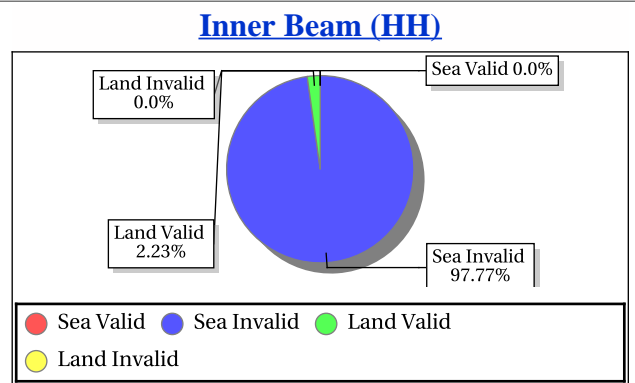

Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
Kp	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.12	2.18	0.12	0.128	0.12	144.44	0.39	3.269
Kpa	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.01	0.02	0.01	0.000	0.01	0.03	0.01	0.000
Kpb	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.02	0.03	0.02	0.000	0.02	0.04	0.02	0.000
Kpc	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000
SNR	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	-12.19	27.99	20.73	28.109	-30.65	28.21	20.48	44.619

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
Kp	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.09	0.18	0.09	0.000	0.09	28.16	0.12	0.523
Kpa	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
Kpb	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000
Kpc	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
SNR	10000 0.00	-10000 0.00	0.00	0.000	10000 0.00	-10000 0.00	0.00	0.000	0.98	21.53	15.53	0.000	-24.62	22.63	15.09	0.246

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

Overall statistics for static parameter (Footprint-wise)

	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
Incidence Angle (deg)	48.83	49.29	49.22	0.000	57.61	58.15	58.07	0.000	Inci.(Inner)	47.10	49.90
Azimuth Diff. (deg)	0.0000	202.29	1.26	14.176	0.0000	285.73	1.13	31.412	Inci.(Outer)	57.30	58.90
Range(Km)	1075.05	1084.10	1082.46	0.000	1258.62	1273.63	1271.37	0.000	Azimuth Diff.	0.60	2.00
X Factor(dbm)	-93.44	-90.31	-90.83	0.000	-95.33	-92.36	-92.66	0.000	Range(Inner)	1025.00	1095.70
Across Distance (Km)	99999.99	-99999.99	0.00	0.000	99999.99	-99999.99	0.00	0.000	Range(Outer)	1210.00	1280.00
Along Distance (Km)	18.84	9601.77	435.15	1.000	18.47	9764.75	442.17	1.000	X-Factor	-100.00	-80.00


- Normal
- Deviations
- Alarming
- High Errors



Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

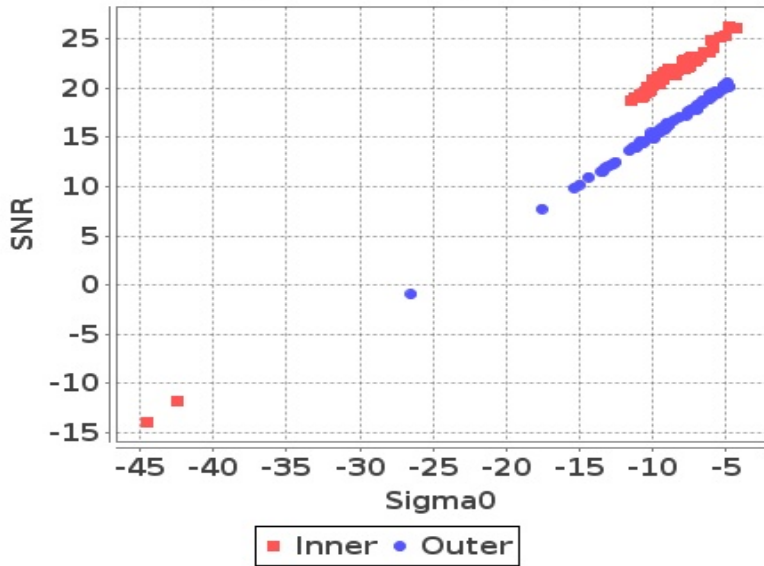


Footprint-Sea

Sigma0 Vs SNR (Sea)

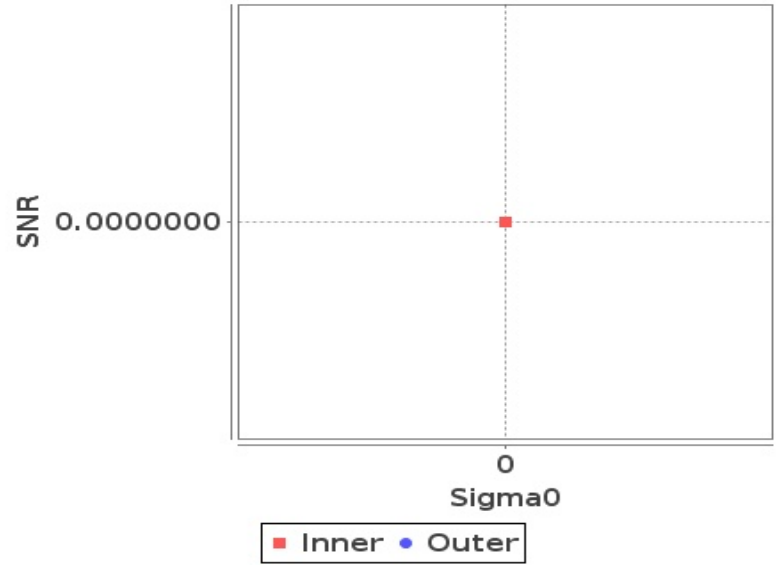


Slice-Land

Sigma0 Vs SNRatSlice (Land)

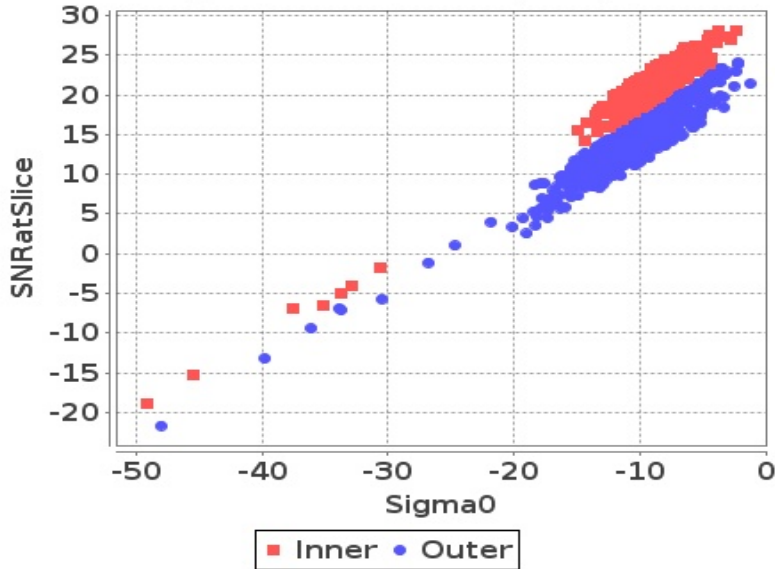

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

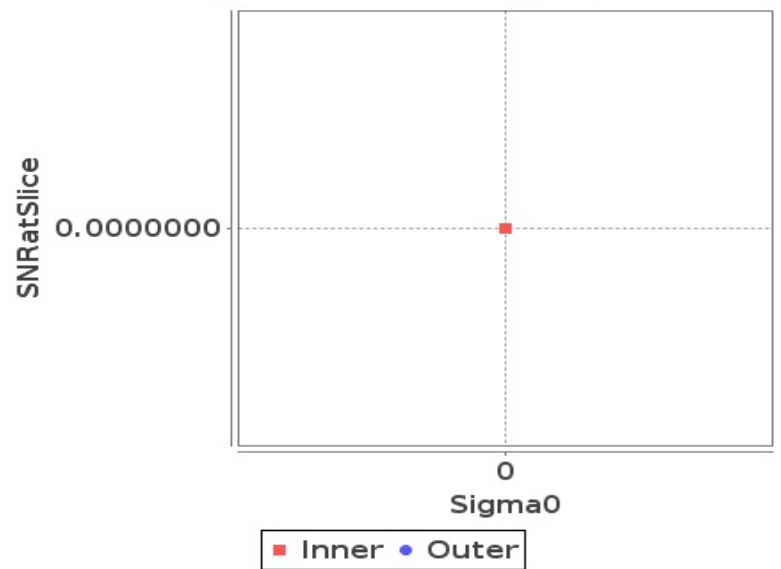

Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

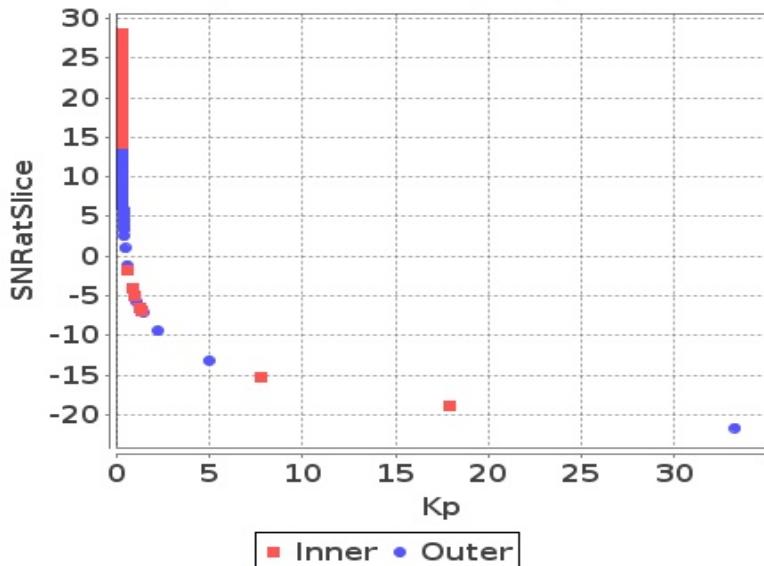

Slice


Kp Vs SNRatSlice (Sea)

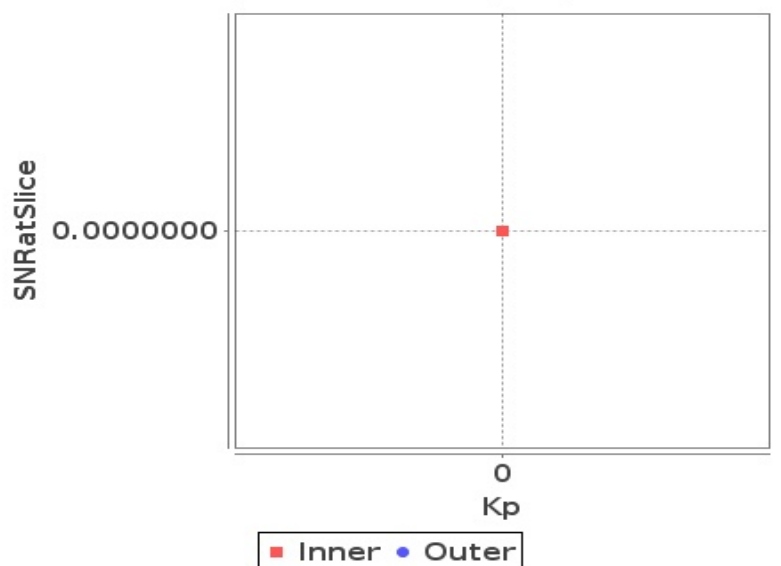

Sigma0 Behaviour(Sigma0 Vs Kp)


Footprint-Land

Sigma0 Vs Kp (Land)

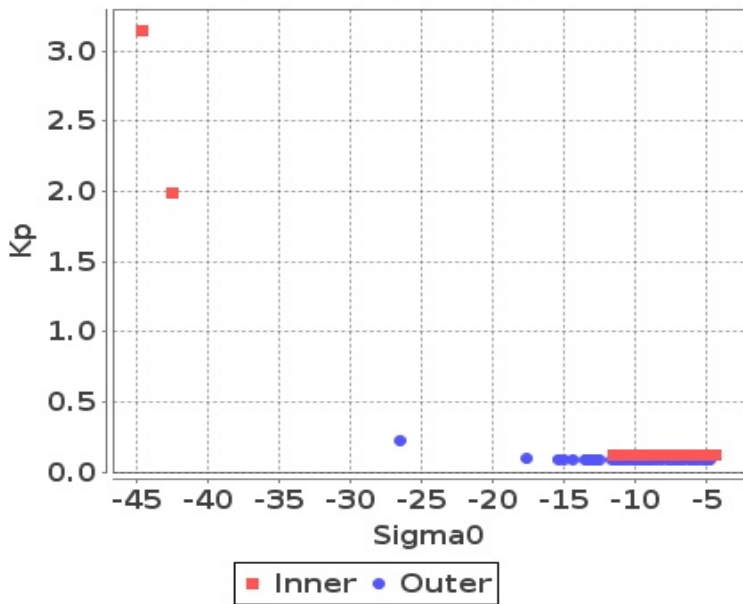


Footprint-Sea

Sigma0 Vs Kp (Sea)

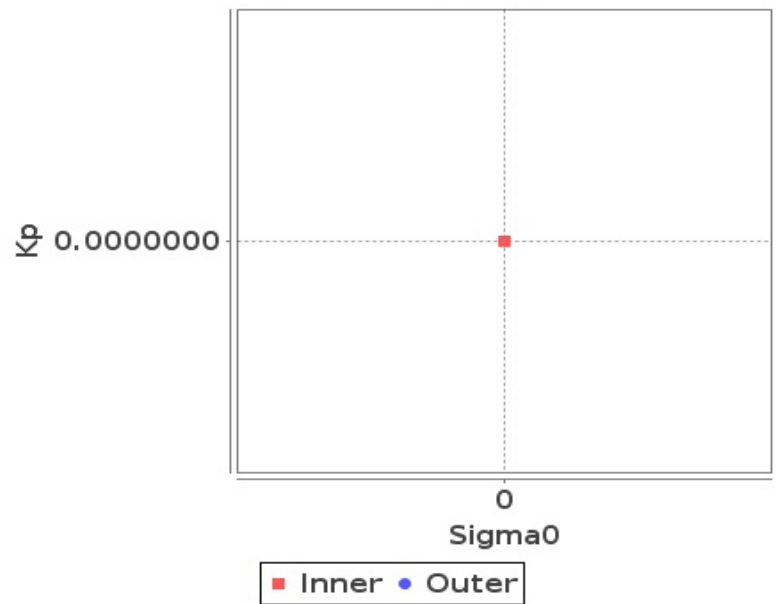


Slice-Land

Sigma0 Vs KpatSlice (Land)

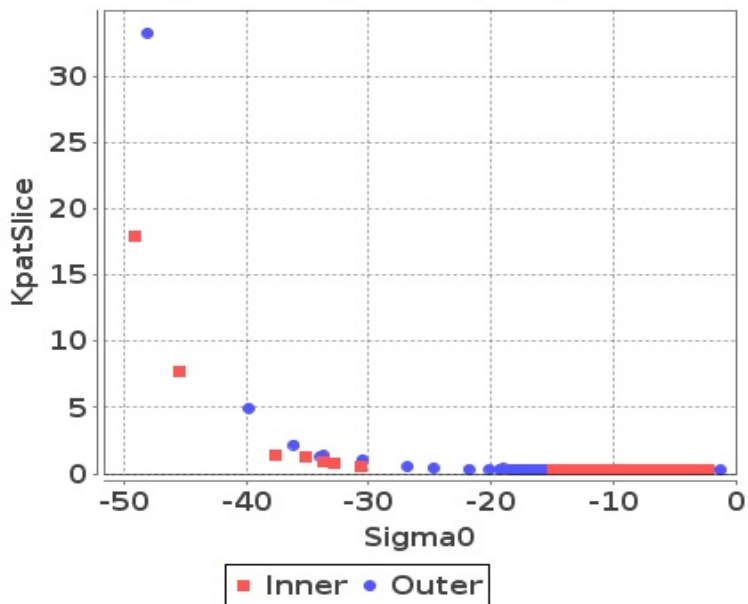

Slice-Sea

Sigma0 Vs KpatSlice (Sea)




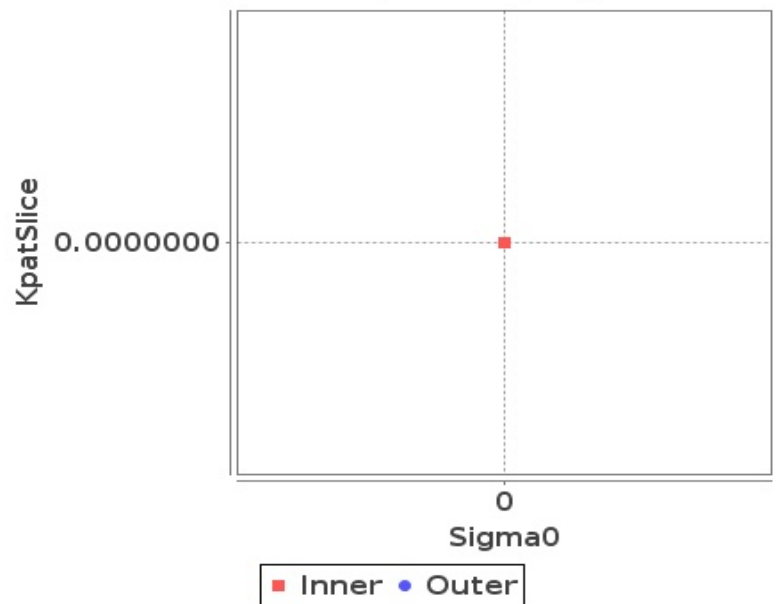


Dynamic Range (Data Histograms)

Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-42	-61	0	0
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-24	-50	0	0
Max	0	0	0	0

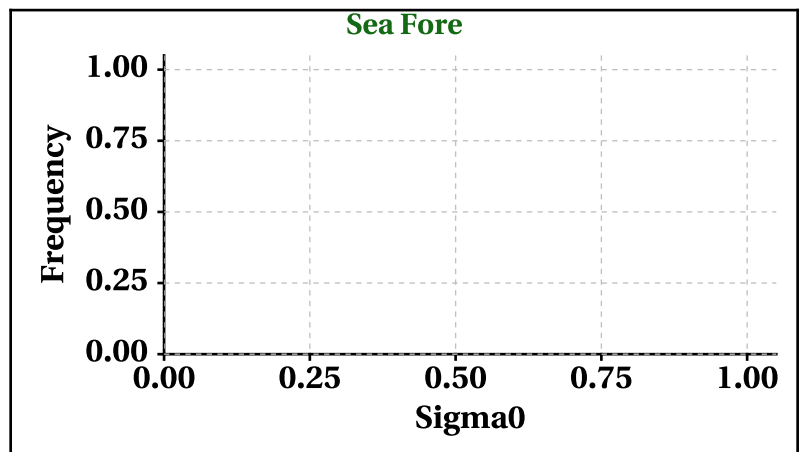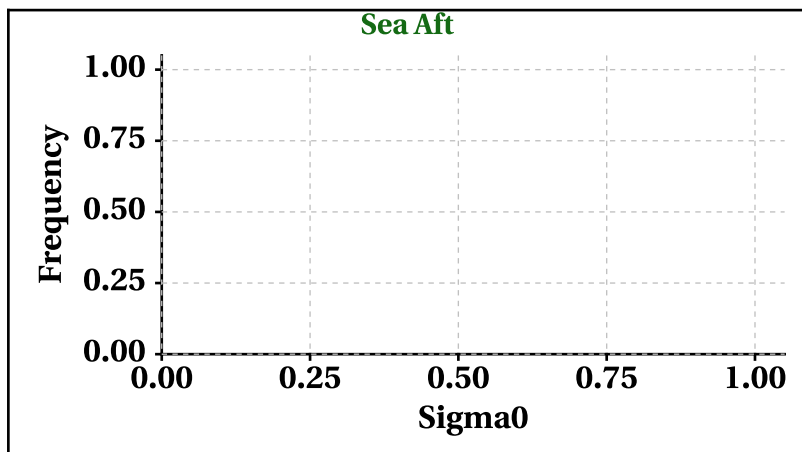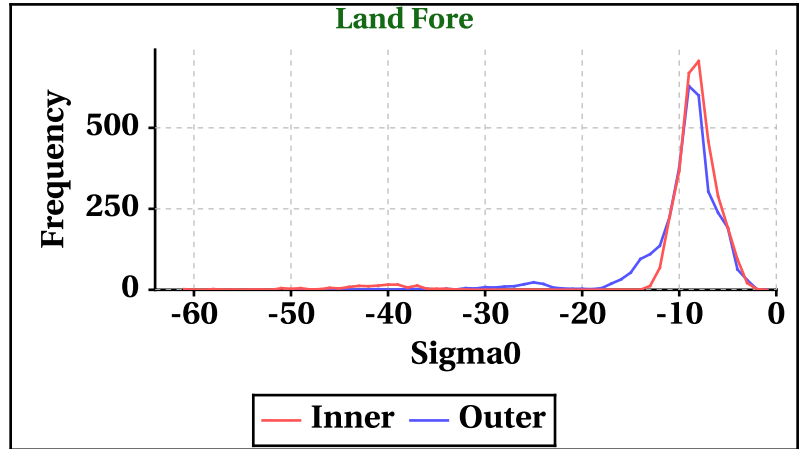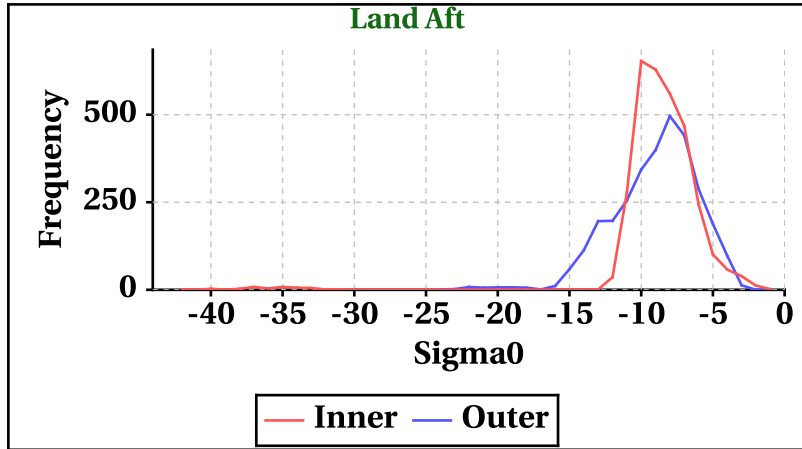

Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	225	225	0	0

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	273	276	0	0

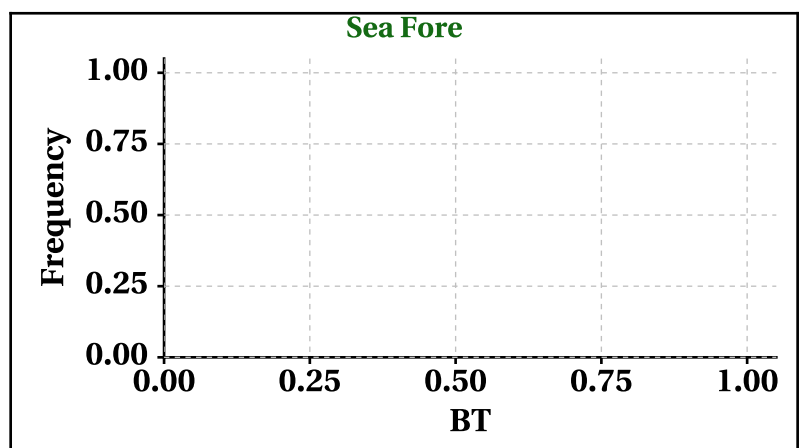
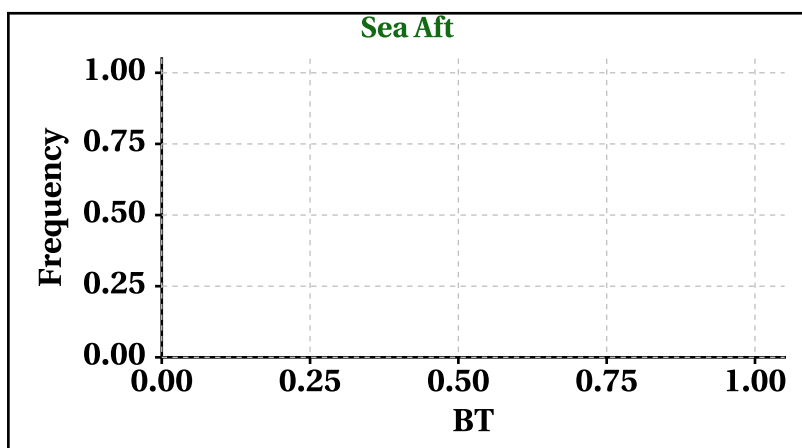
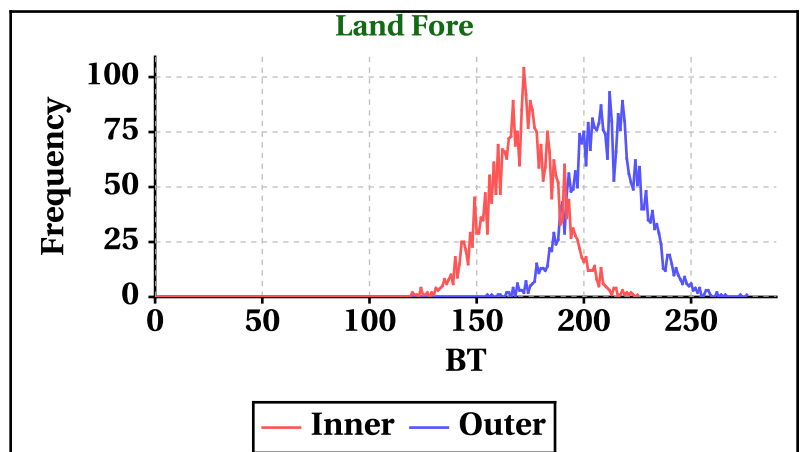
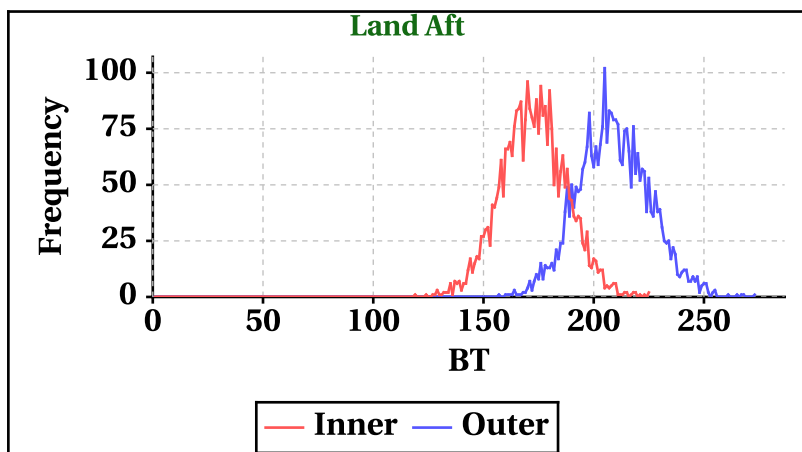


Dynamic Range (Data Histograms)

SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-12	-30	0	0
Max	27	28	0	0

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	-24	0	0
Max	21	22	0	0

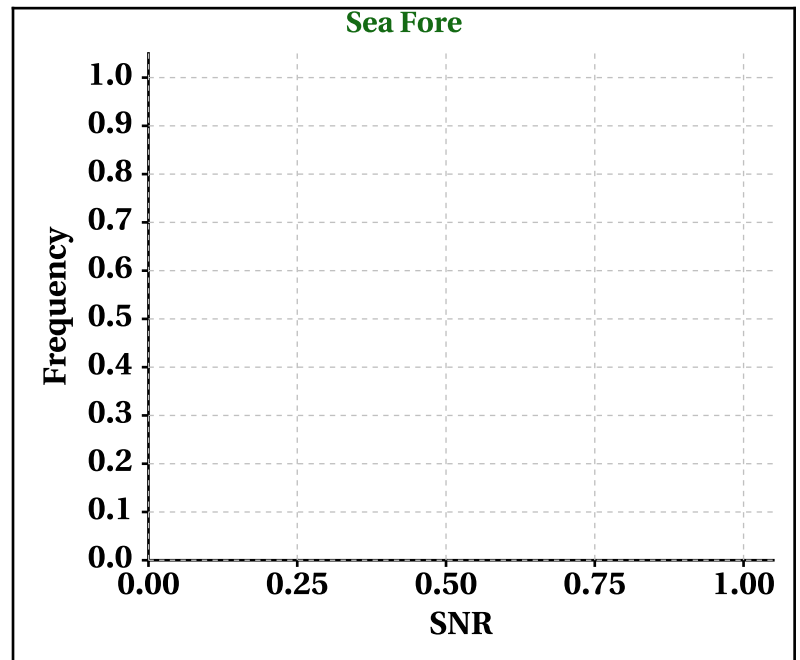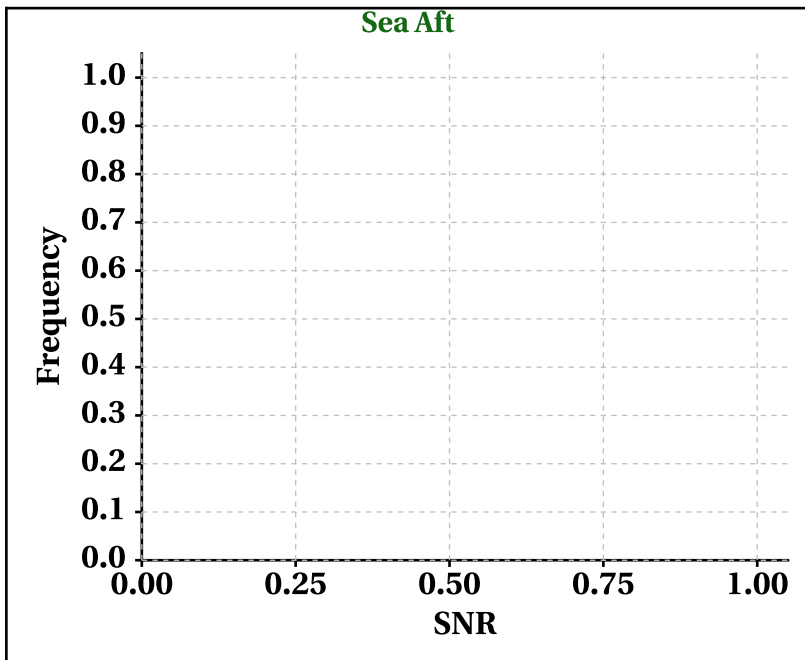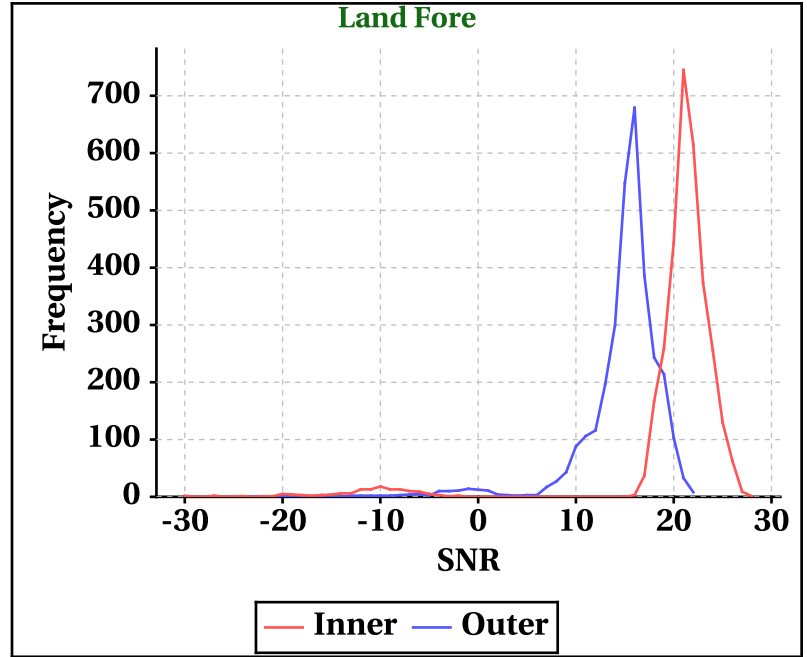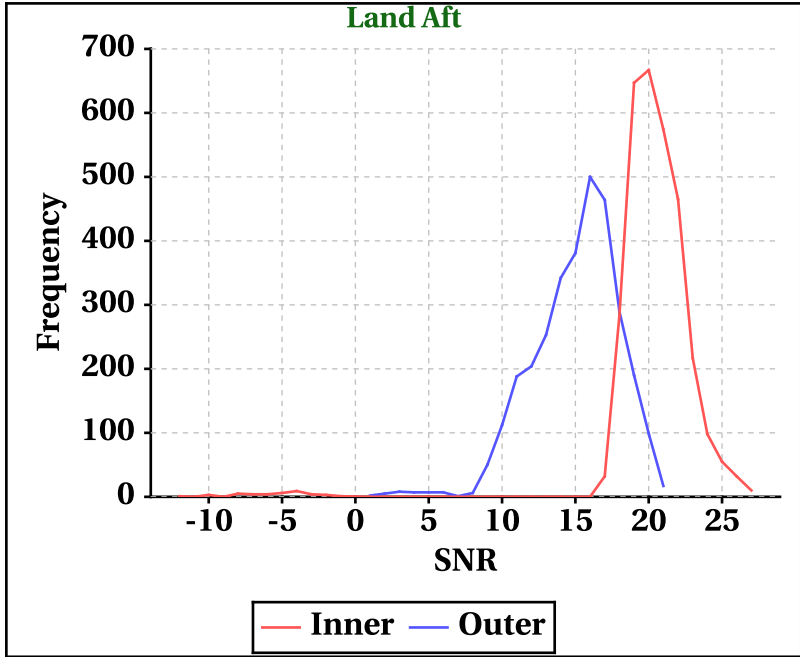


Orbit-wise behaviour of SNR

Inner Beam (HH)

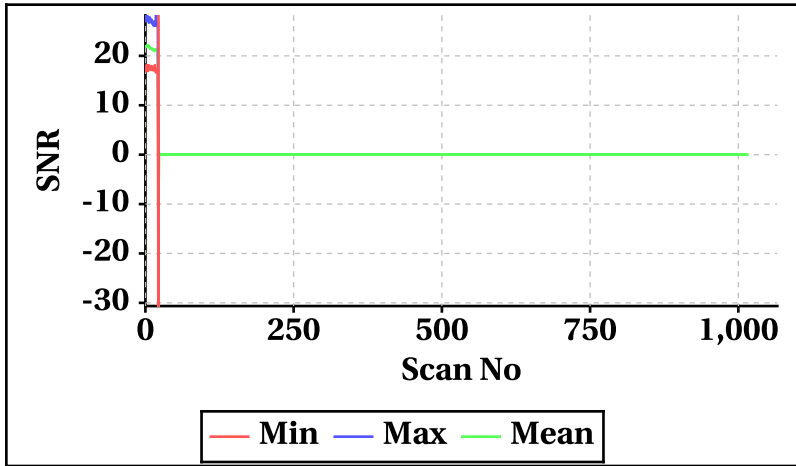


Outer Beam(VV)

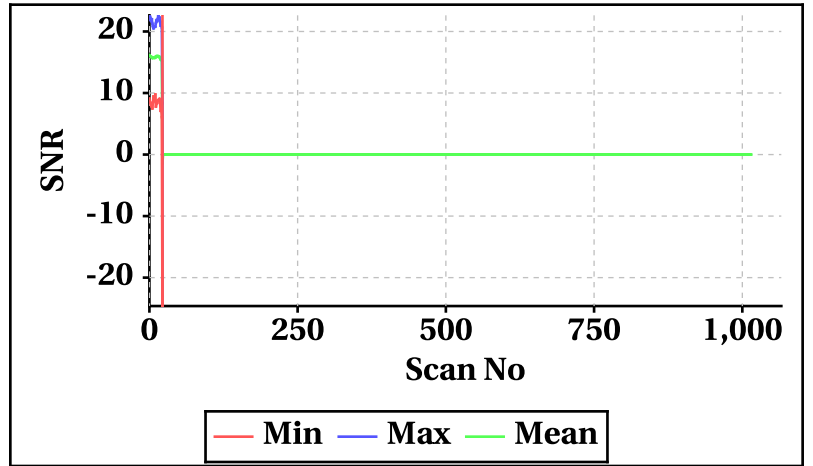


Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

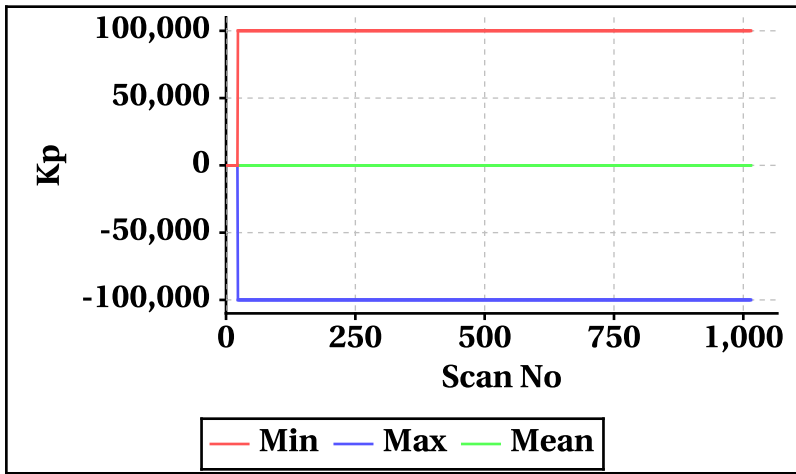


Outer Beam(VV)

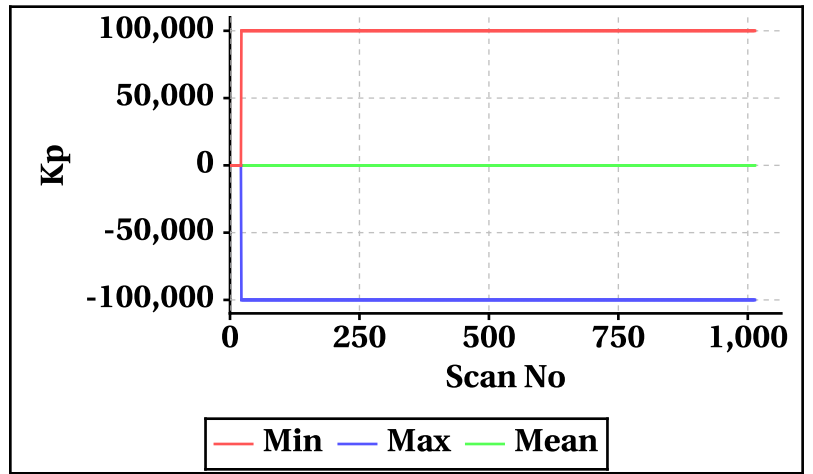


Inner Beam(HH)

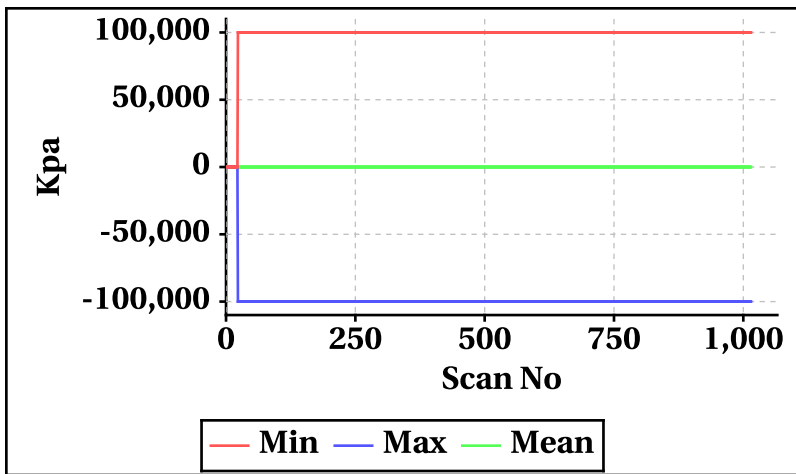


Outer Beam(VV)

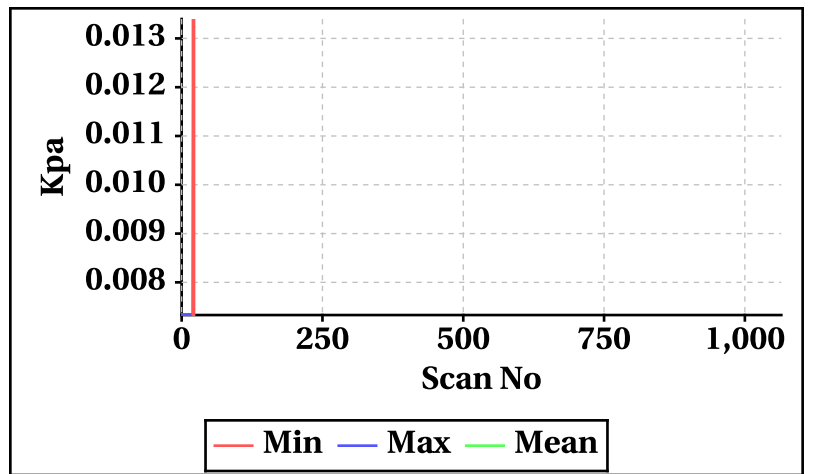


Inner Beam(HH)

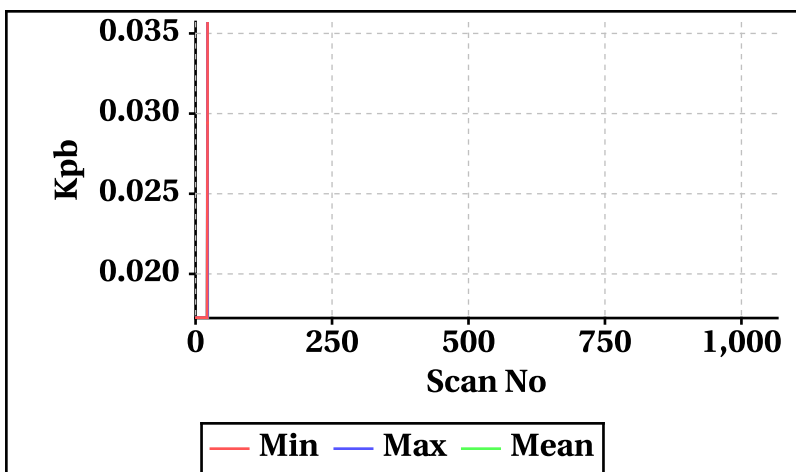


Outer Beam(VV)

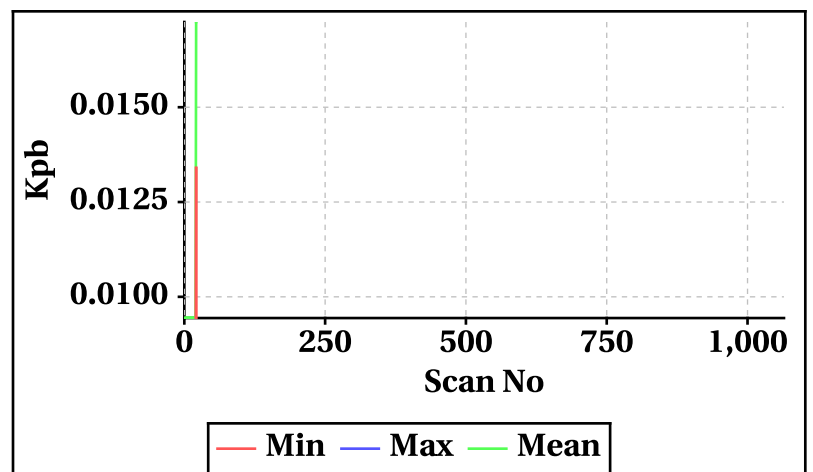


Inner Beam(HH)

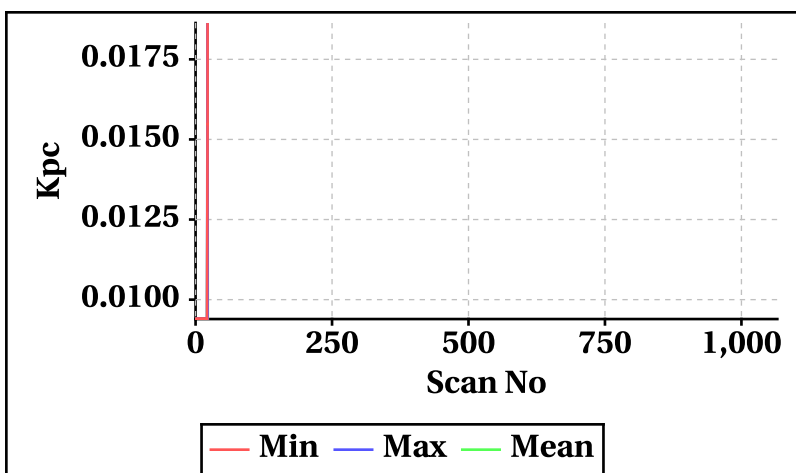


Outer Beam(VV)

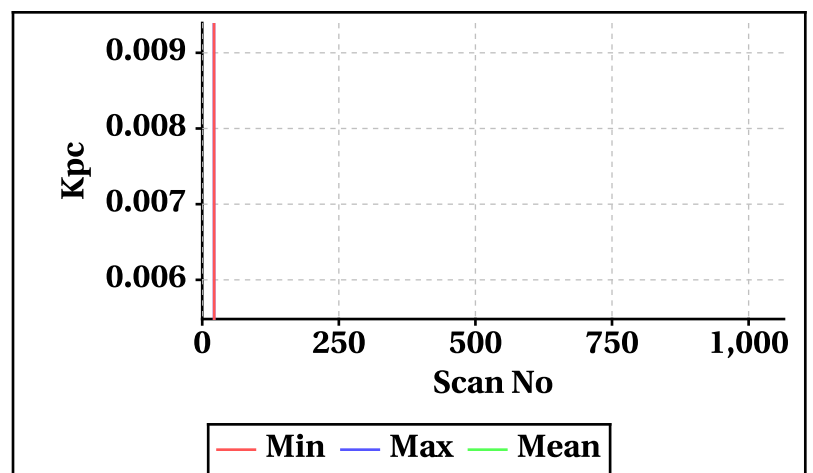


Inner Beam (HH)

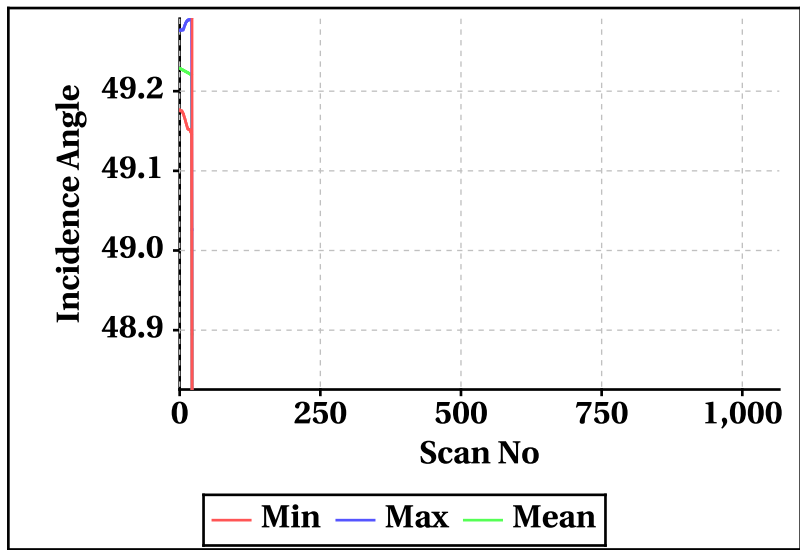


Outer Beam(VV)

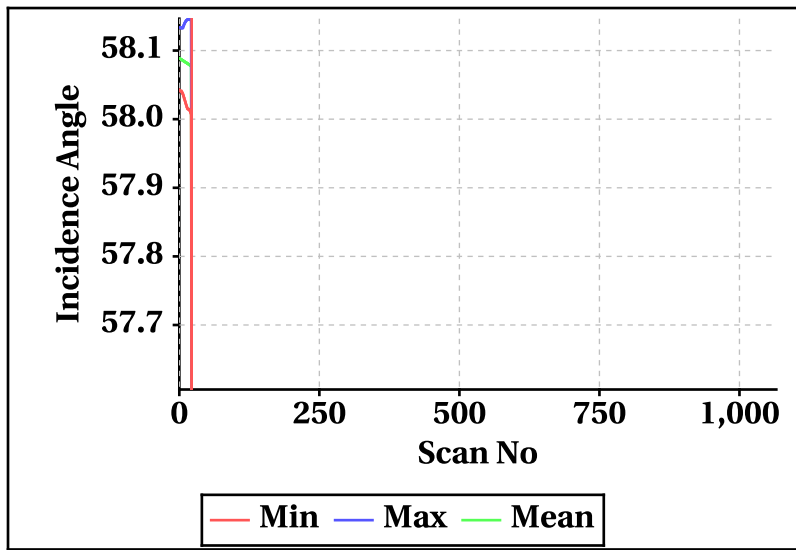


Inner Beam (HH)

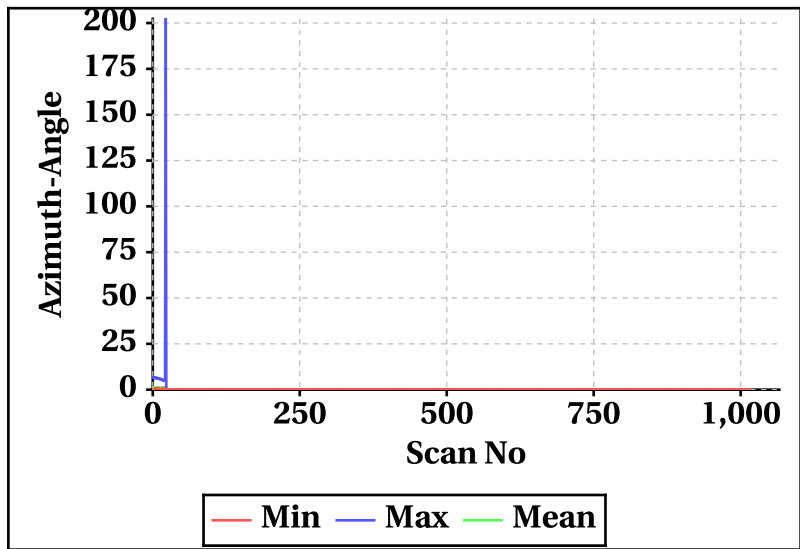


Outer Beam(VV)

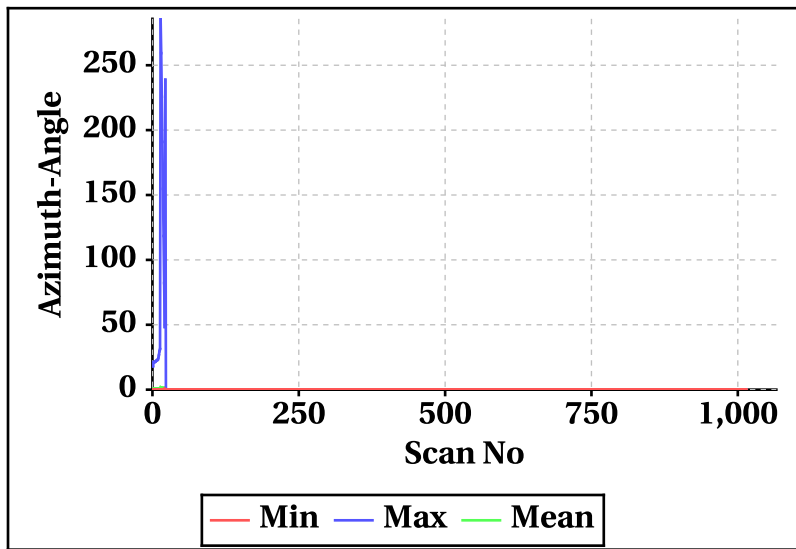


Inner Beam (HH)

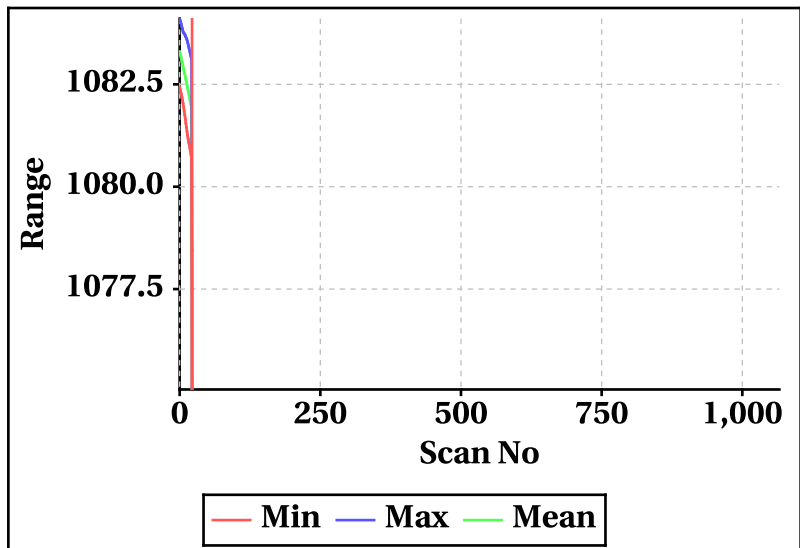


Outer Beam(VV)

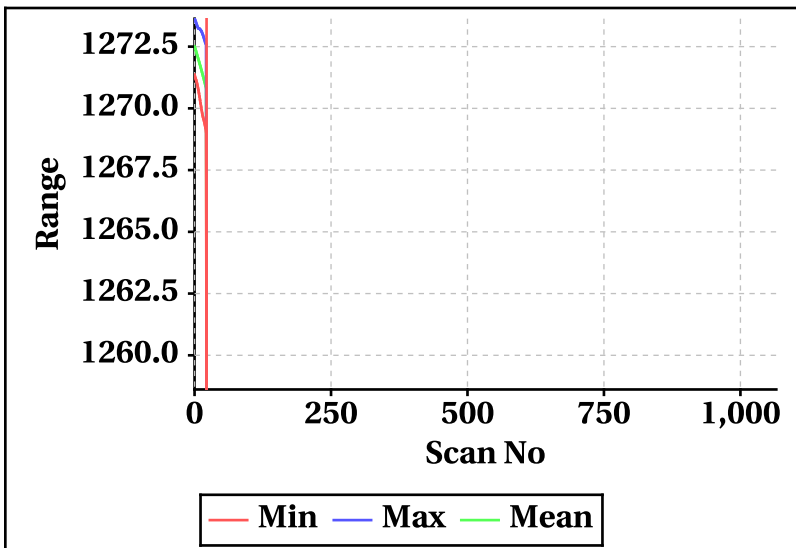

Inner Beam (HH)

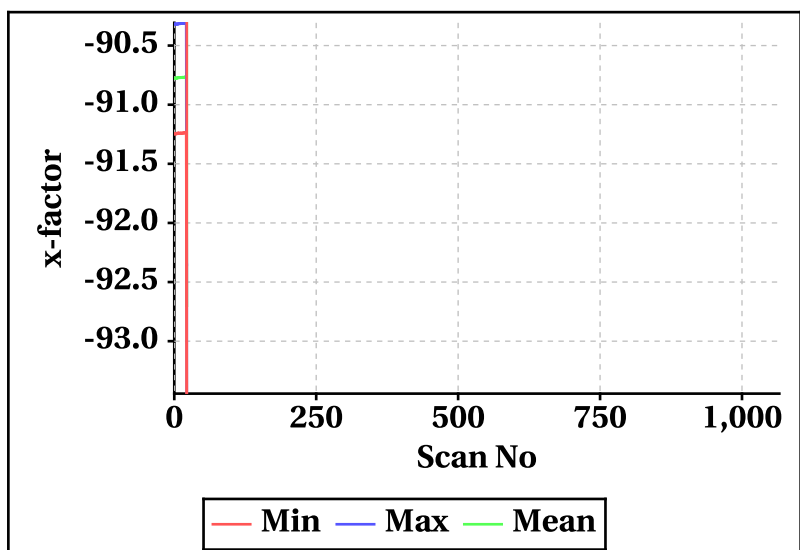

Outer Beam(VV)

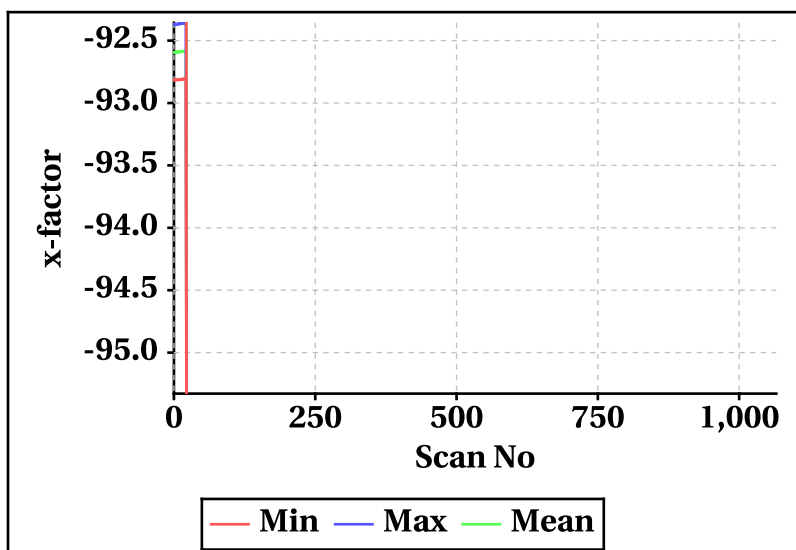


Doppler Frequency Variation


Doppler Frequency(KHz) variation statistics Over the half Orbit

	Inner Beam (HH)	Outer Beam (VV)
Min	-460.56	-516.28
Max	461.74	517.36

Footprint wise Doppler frequency variation Inner Beam (HH)

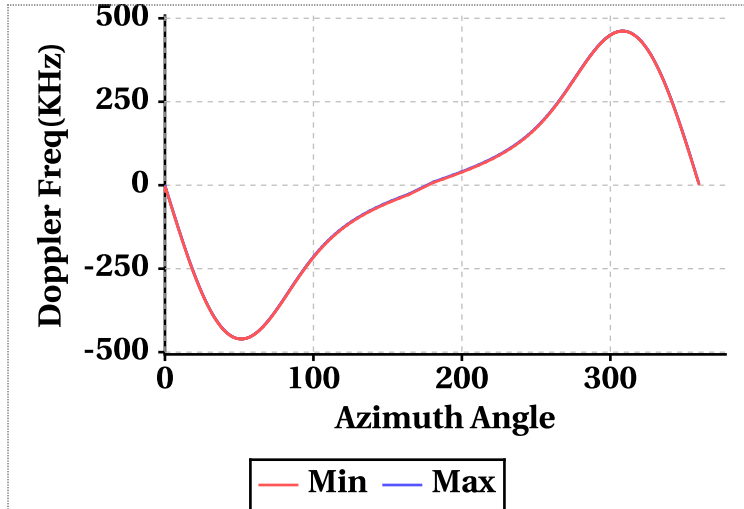


Footprint wise Doppler frequency variation Outer Beam (VV)

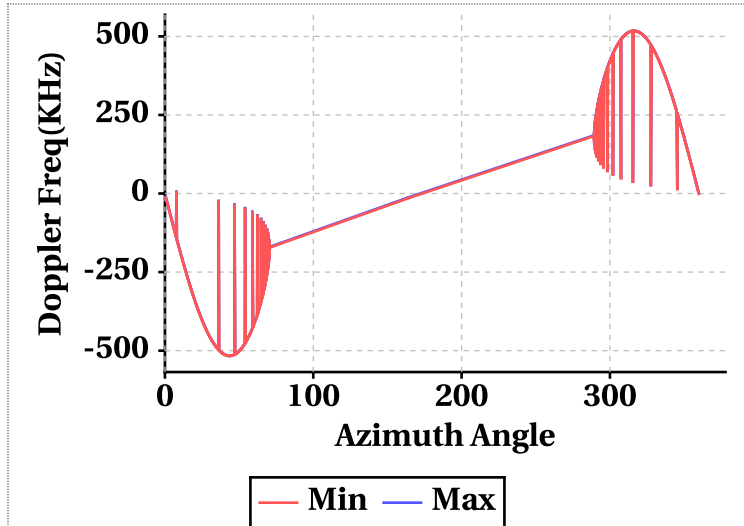


Doppler Frequency(KHz) variation

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	5.06	10.08	5.15	3.14	5.64	5.61
Doppler_70	5.06	461.70	15.40	5.64	517.16	17.22
Doppler_140	5.06	16.56	5.30	5.64	12.58	5.77
Doppler_210	-460.10	5.12	-5.01	-516.00	5.68	-5.65
Doppler_280	-18.40	5.06	4.58	-14.90	5.64	5.22

Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)

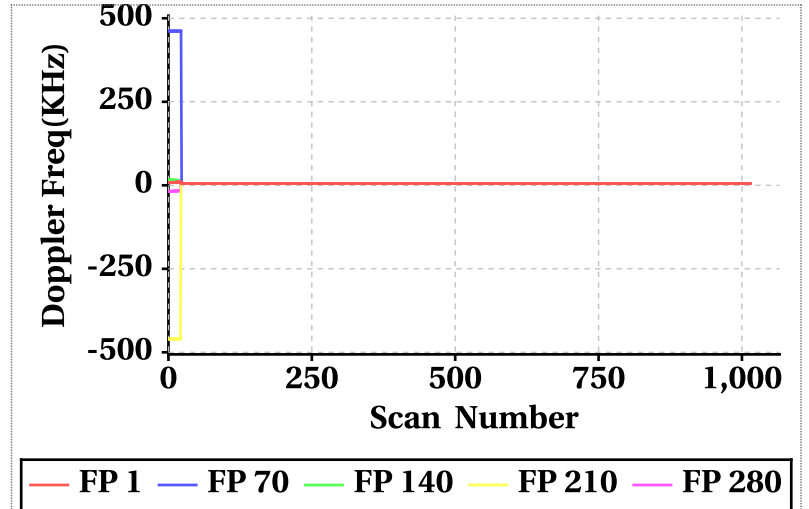


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)

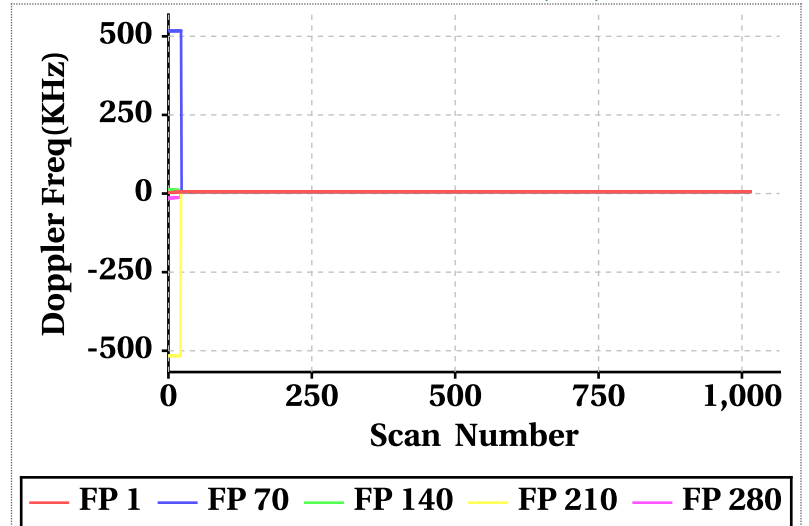


Latitude Vs Doppler Frequency

Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]

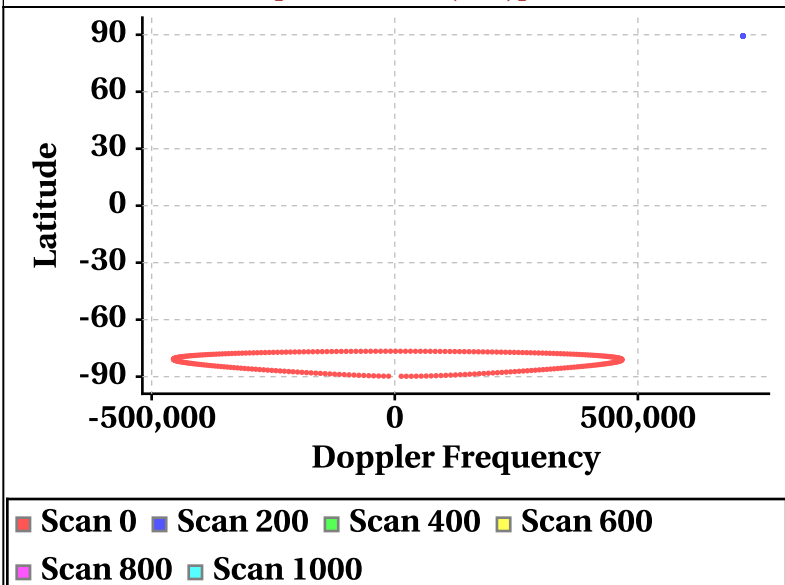


Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]

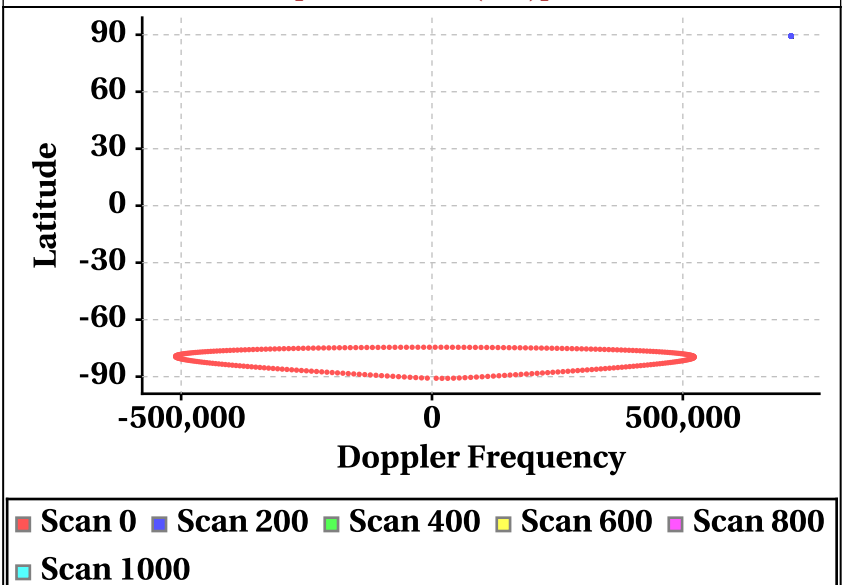

Parameter as a function of Latitude


Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

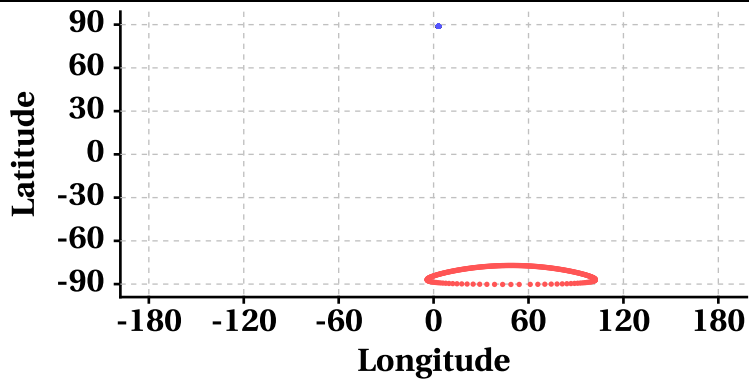

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600
■ Scan 800 ■ Scan 1000


Scan Trace [Outer Beam (VV)]

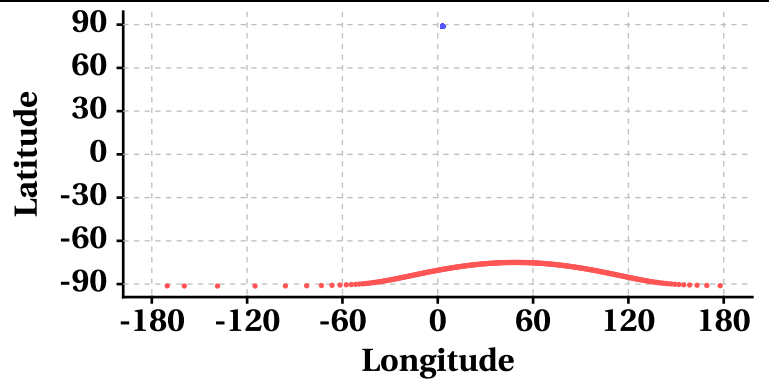

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600
■ Scan 800 ■ Scan 1000


Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

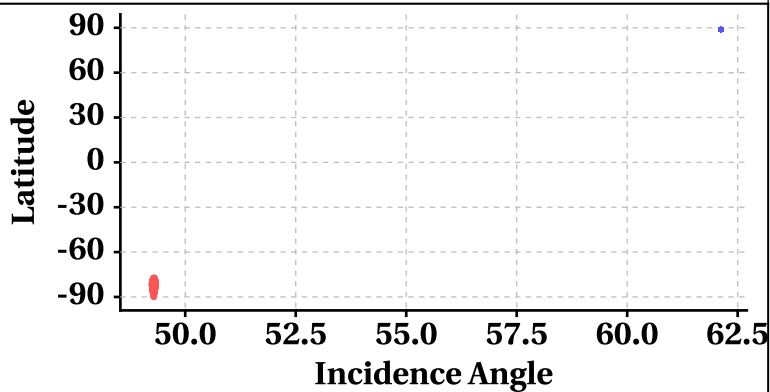

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600
■ Scan 800 ■ Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

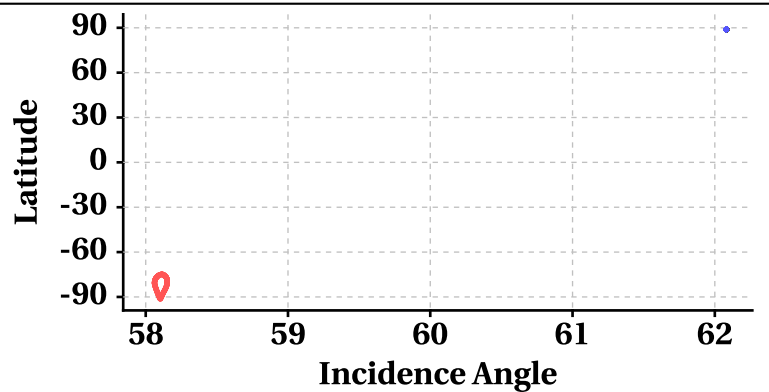

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600
■ Scan 800 ■ Scan 1000


Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

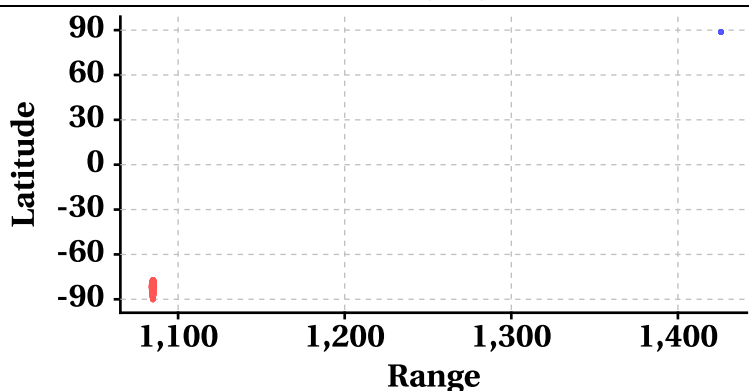

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600
■ Scan 800 ■ Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

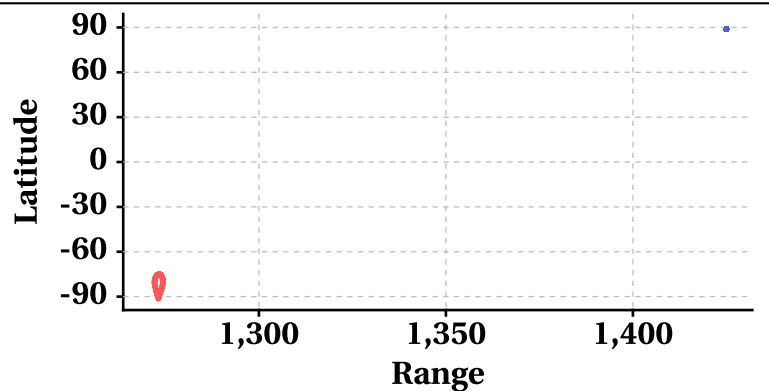

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600
■ Scan 800 ■ Scan 1000



Variation in Orbit and Attitude Parameters

