


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents


- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	14451	<b>Total Scans</b>	1016
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	14452	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	v1.1.3	<b>Rev. Number</b>	14451_14452	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	NS	<b>Data Production Date</b>	20-06-2019	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	19-06-2019	<b>Equator Crossing Time</b>	20:33:43.000	<b>No Of Outer Slices</b>	15


## Brightness Temperature(k) Footprint trace

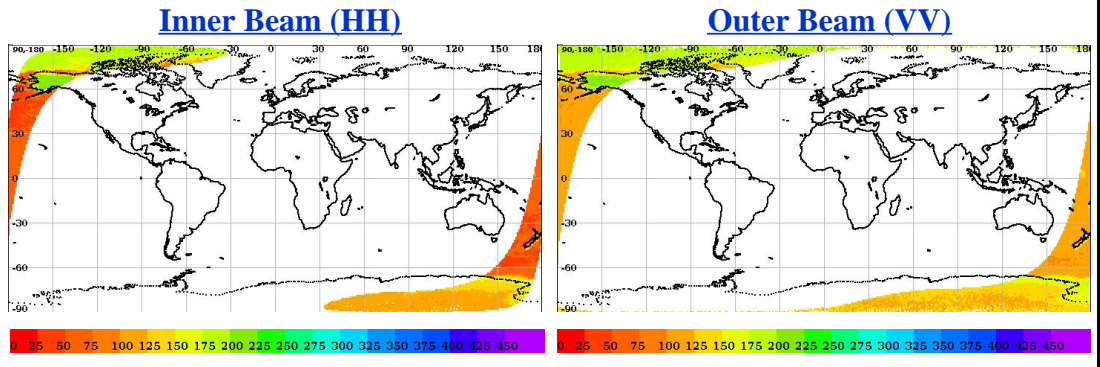

## Image Snapshot for Inner & Outer Beam

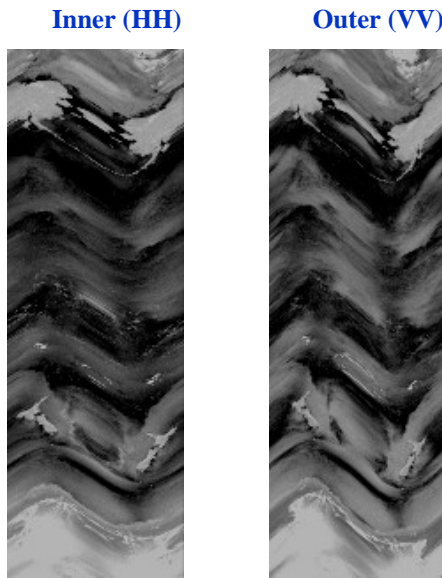

## Sigma0(dB) Footprint trace

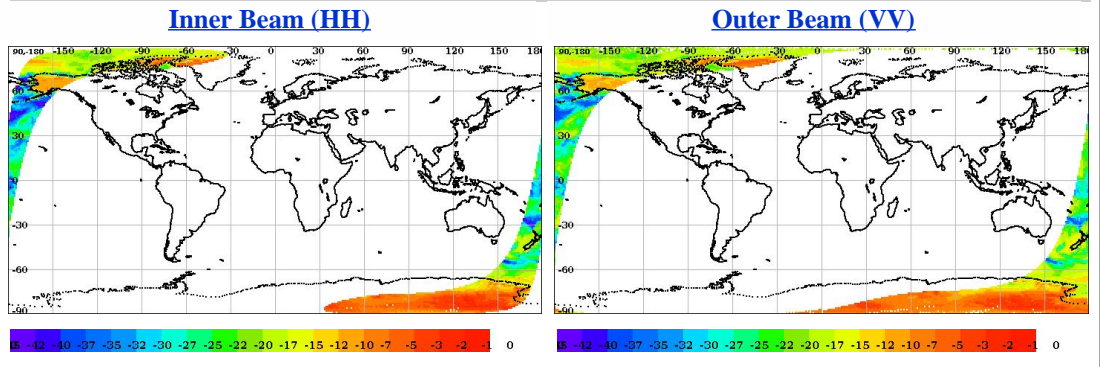


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.00	0.00
Data Not Available From Payload (%)	100.0	100.0
Slice not within sample array limits (%)	0.00	0.00
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	22.23	13.35
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	0.076672	0.160686


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

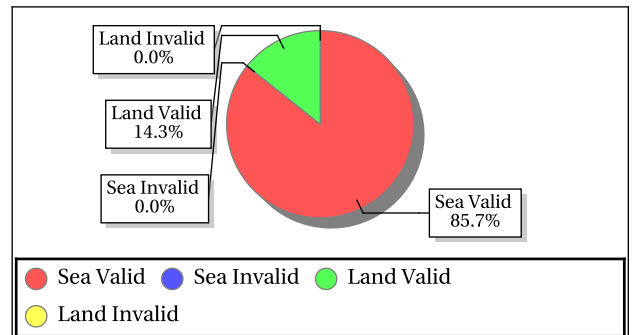

### Outer Beam (VV)

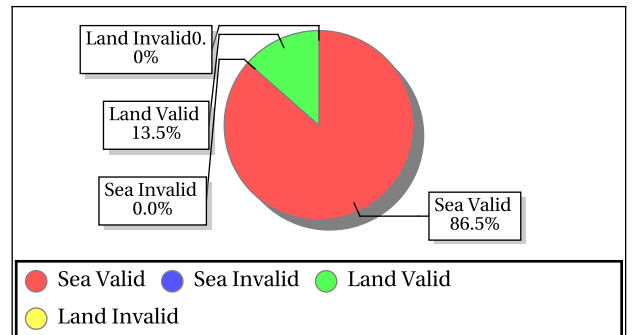

## Invariant Site Sigma-0 Statistics for Ascending/Descending, Fore/Aft in HH/VV beams

Site Name	Center Lat	Center Lon	Beam	Node	ScanDir	Sigma0 Min	Sigma0 Max	Sigma0 Mean	Sigma0 Std	BT Min	BT Max	BT Mean	BT Std
ANT_1	-75.00	121.00	Inner	DSC	Aft	-7.51	-5.03	-6.50	0.77	88.65	148.84	122.66	15.74
ANT_1	-75.00	121.00	Inner	DSC	Fore	-9.11	-5.55	-7.52	1.01	111.69	146.59	126.95	10.39
ANT_1	-75.00	121.00	Outer	DSC	Aft	-8.87	-7.16	-7.95	0.54	114.46	155.13	137.25	10.98
ANT_1	-75.00	121.00	Outer	DSC	Fore	-9.27	-6.74	-7.97	0.97	91.45	144.08	124.16	16.41
GreenLand_2	77.50	-41.50	Outer	DSC	Aft	-5.11	-5.11	-5.11	0.00	162.65	162.65	162.65	0.00



## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.12	303.98	0.47	5.303	0.12	274.48	0.44	4.913	0.12	0.14	0.12	0.000	0.12	0.13	0.12	0.000
<b>Kpa</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.96	24.10	2.91	0.007	-34.52	23.84	2.95	0.009	5.93	28.50	18.99	24.656	8.87	29.29	20.51	36.363

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.09	225.60	0.47	5.468	0.09	232.40	0.45	5.279	0.09	0.14	0.09	0.000	0.09	0.13	0.09	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.84	20.02	0.73	0.000	-34.96	17.65	0.82	0.000	0.58	22.14	12.81	0.006	1.40	23.21	14.33	0.806

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)

	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.73	49.40	49.02	0.000	57.53	58.19	57.91	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0027	266.58	1.27	2.629	0.0000	290.75	1.27	3.693	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1040.28	1077.45	1056.29	0.000	1219.40	1265.65	1238.87	0.000	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.89	-90.12	-90.66	0.000	-93.18	-92.16	-92.28	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	15.84	16.37	16.05	0.000	10.45	23.40	21.09	3.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.98	1273.23	22.17	2.000	18.58	1665.87	22.85	2.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



## Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

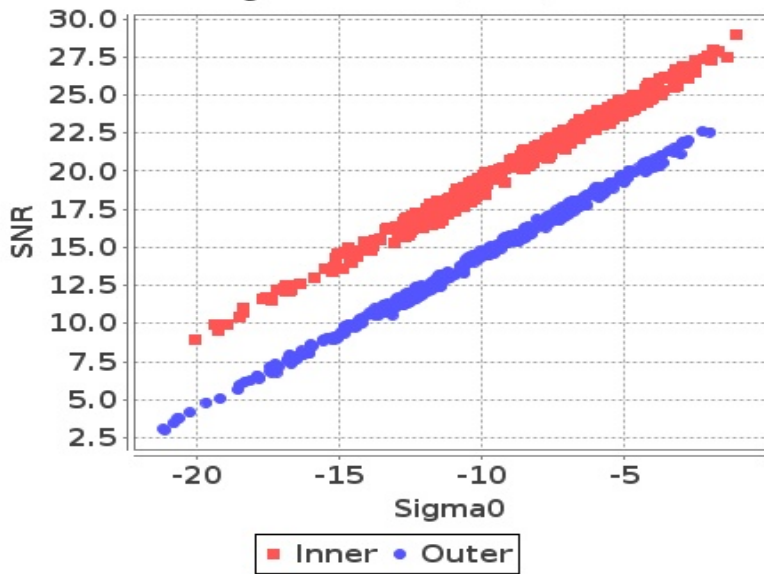


Footprint-Sea

Sigma0 Vs SNR (Sea)

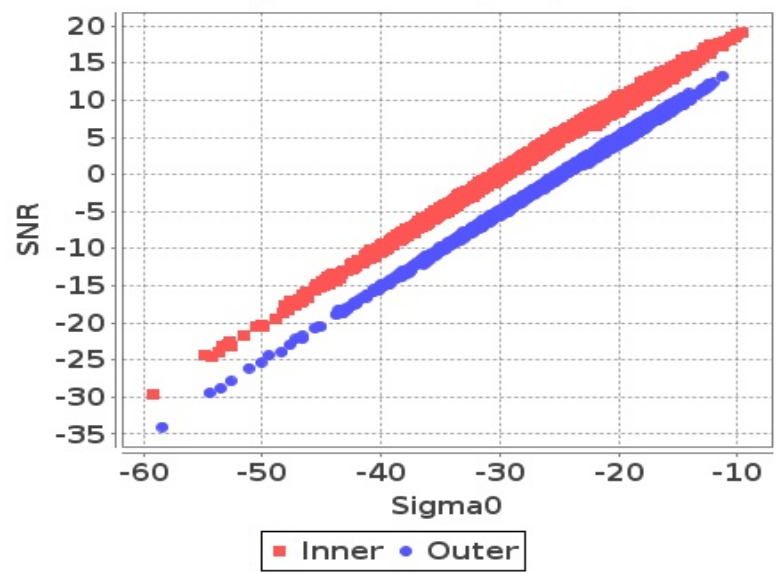


Slice-Land

Sigma0 Vs SNRatSlice (Land)

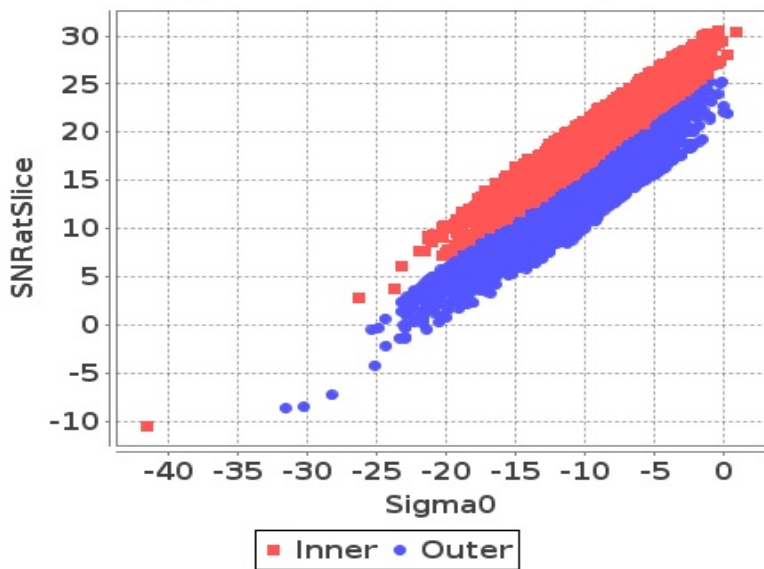

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

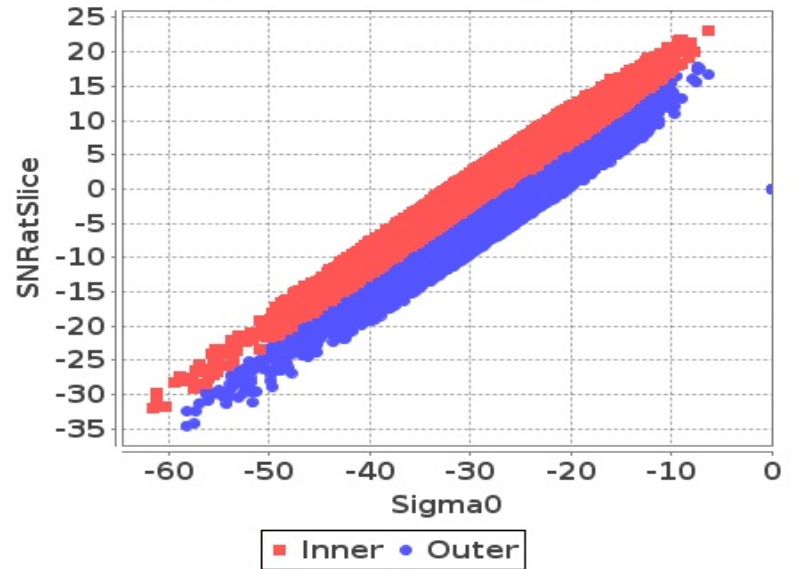

## Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

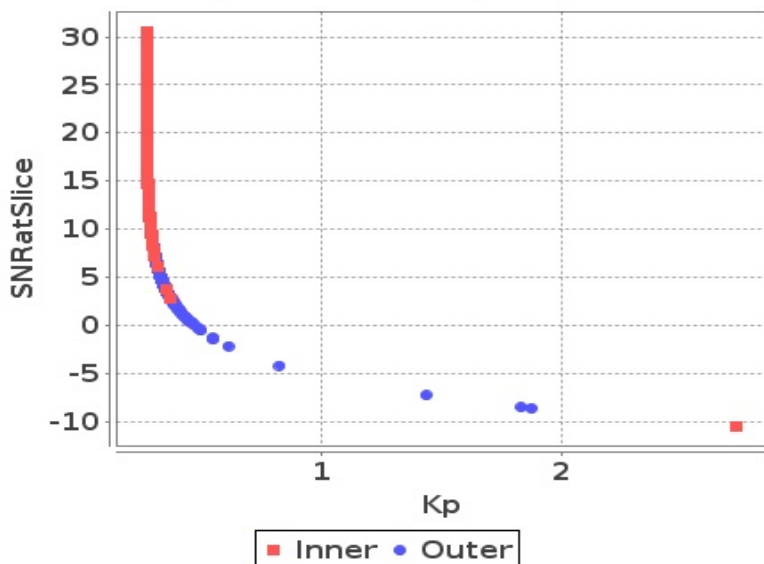

Slice


Kp Vs SNRatSlice (Sea)

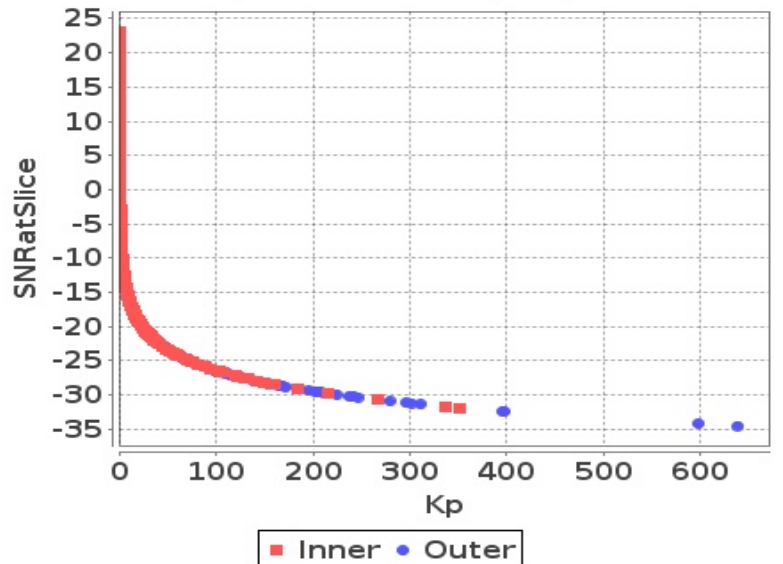

# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

### Sigma0 Vs Kp (Land)

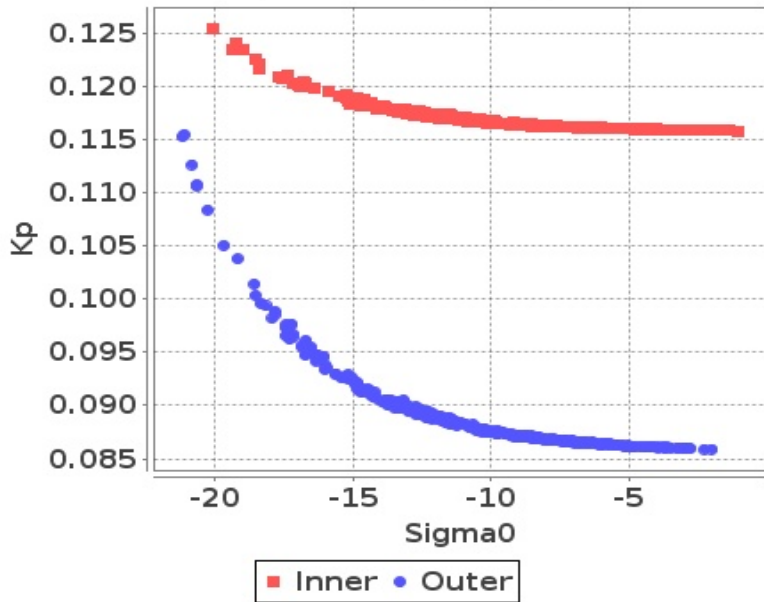


## Footprint-Sea

### Sigma0 Vs Kp (Sea)

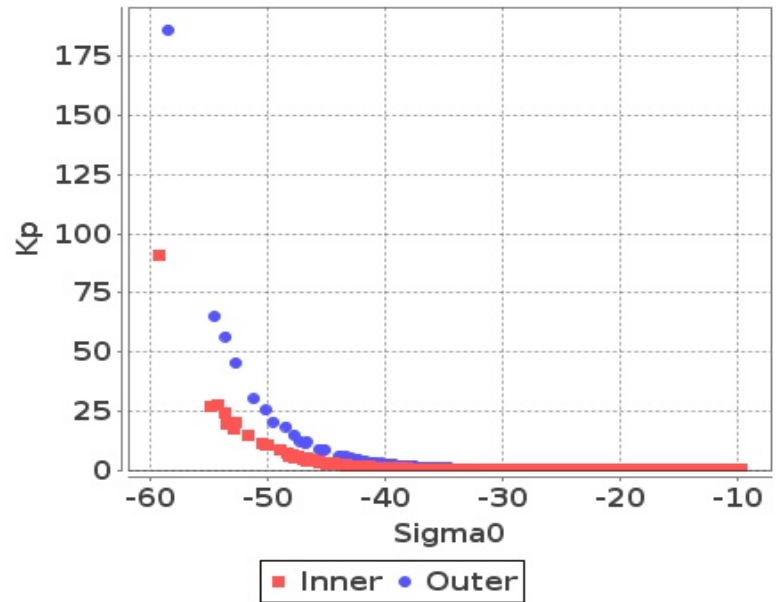


## Slice-Land

### Sigma0 Vs KpatSlice (Land)

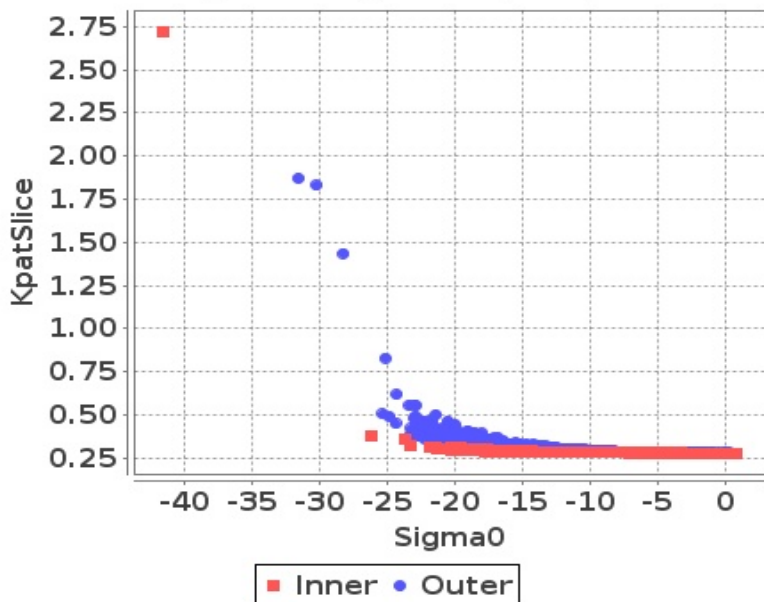

## Slice-Sea

### Sigma0 Vs KpatSlice (Sea)

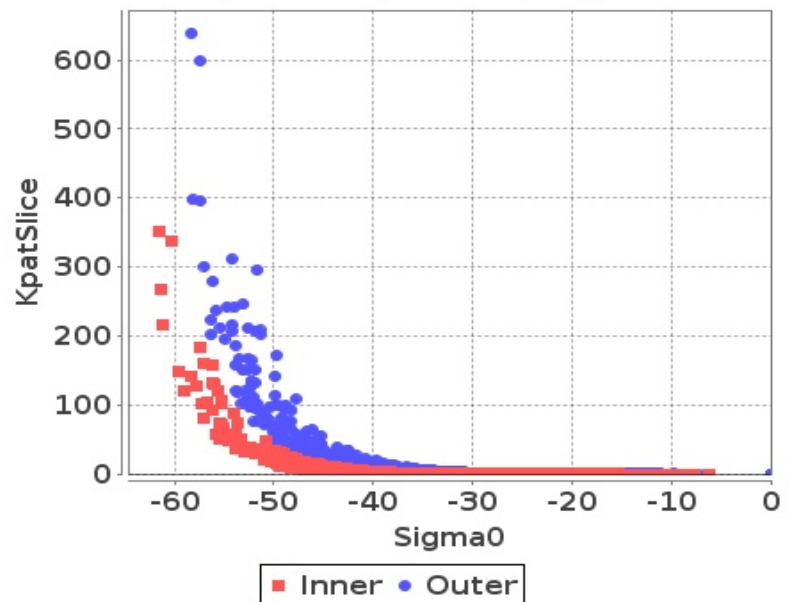







# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-23	-20	-64	-65
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-23	-23	-59	-60
Max	0	0	0	0

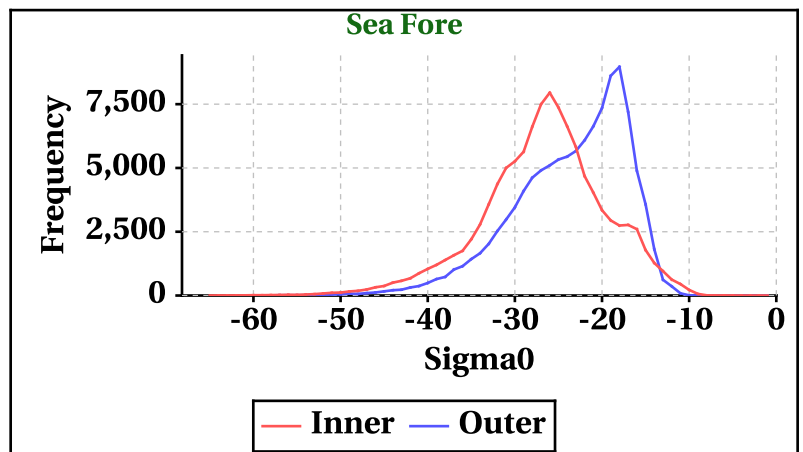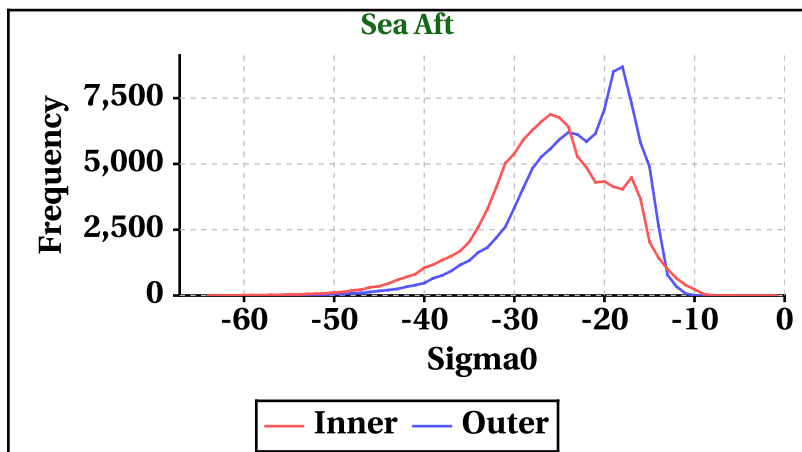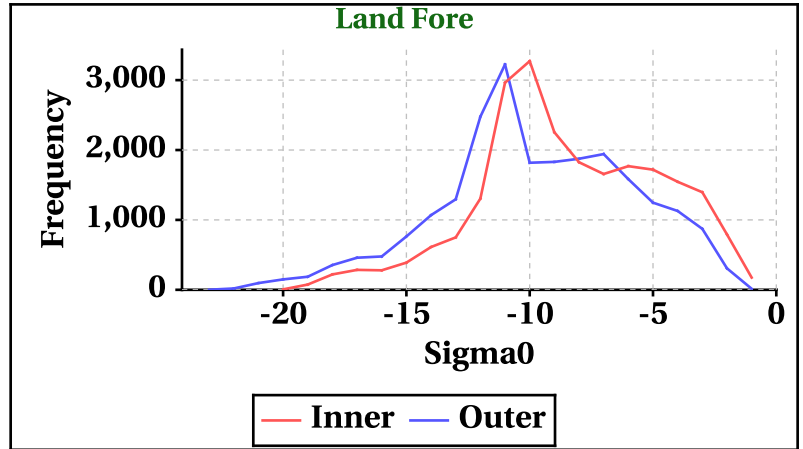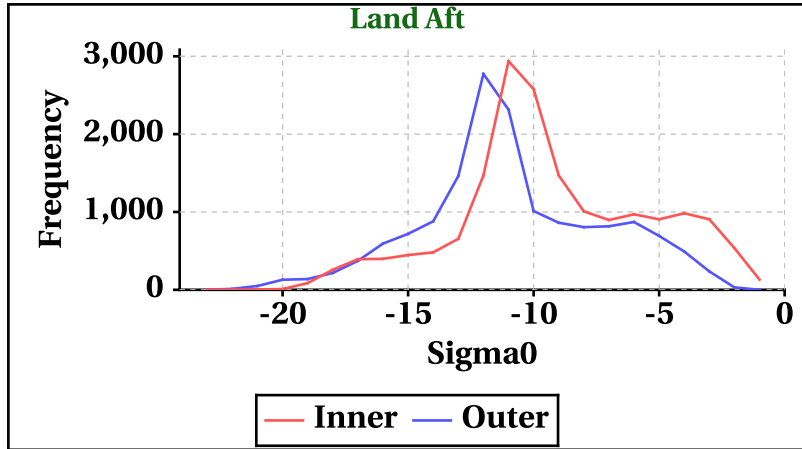

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	274	278	240	245

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	267	264	255	248

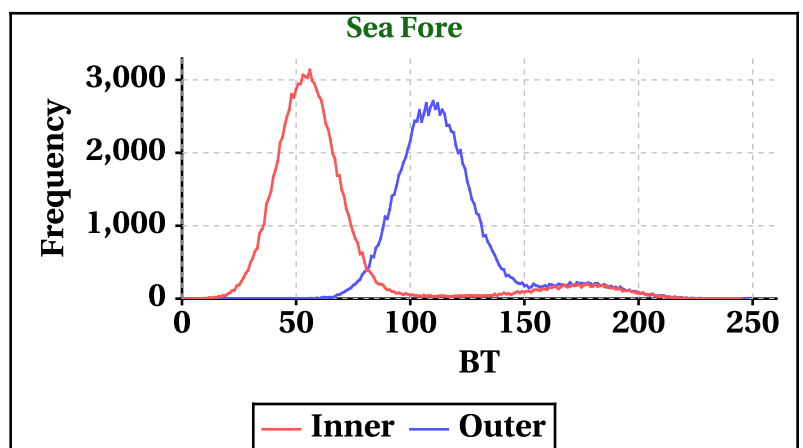
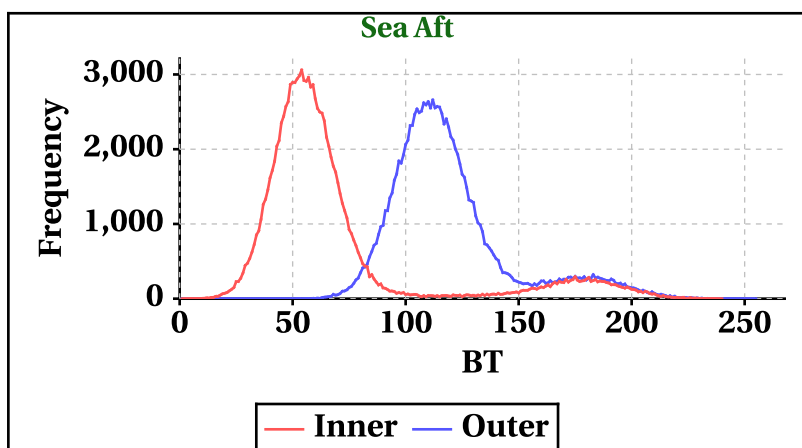
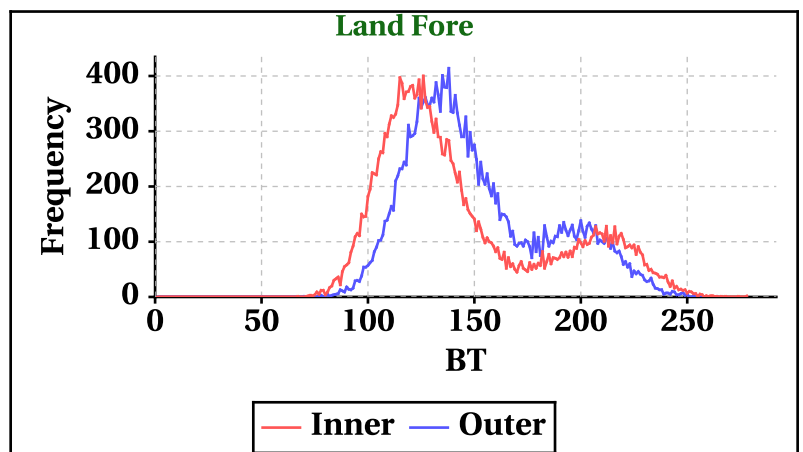
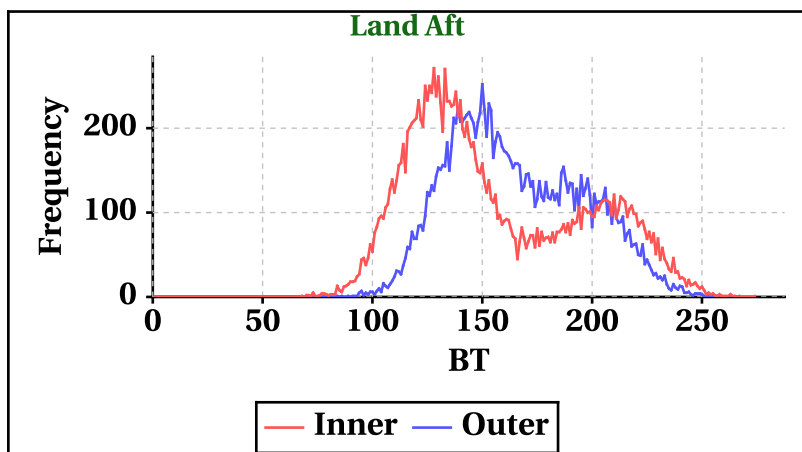


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	-34	-34
Max	28	29	24	23

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	-34	-34
Max	22	23	20	17

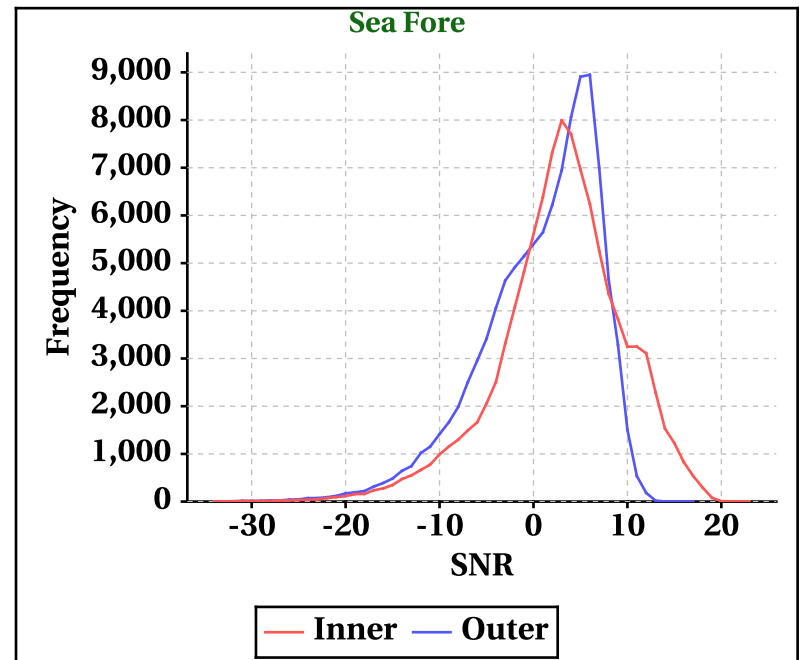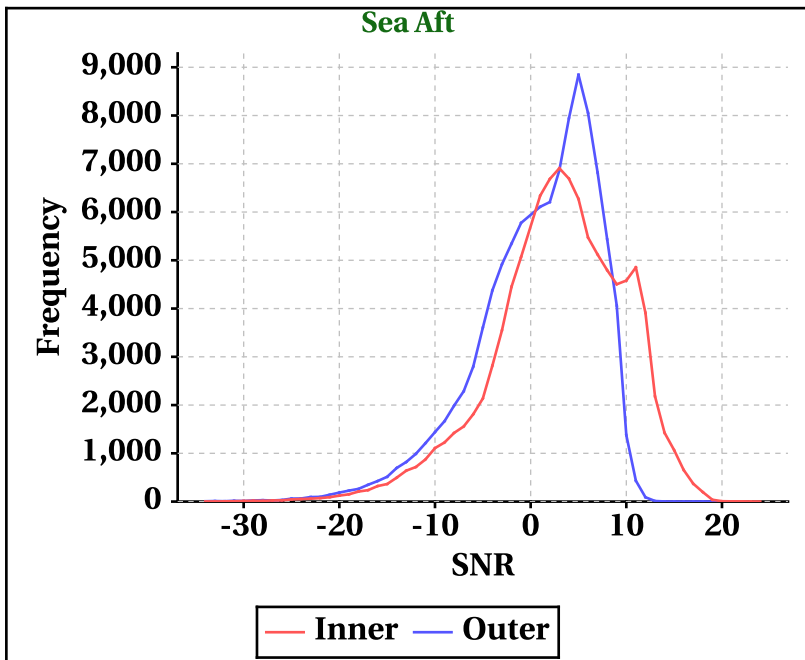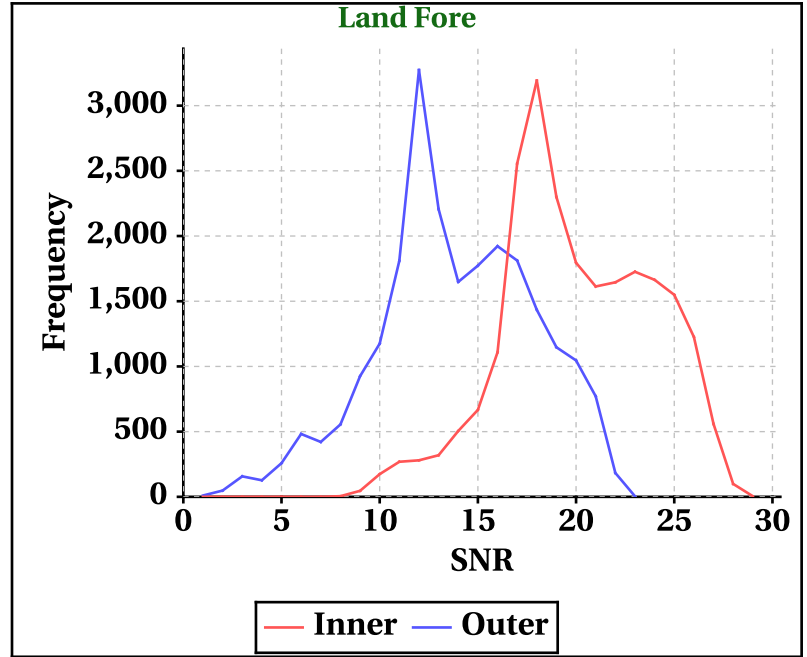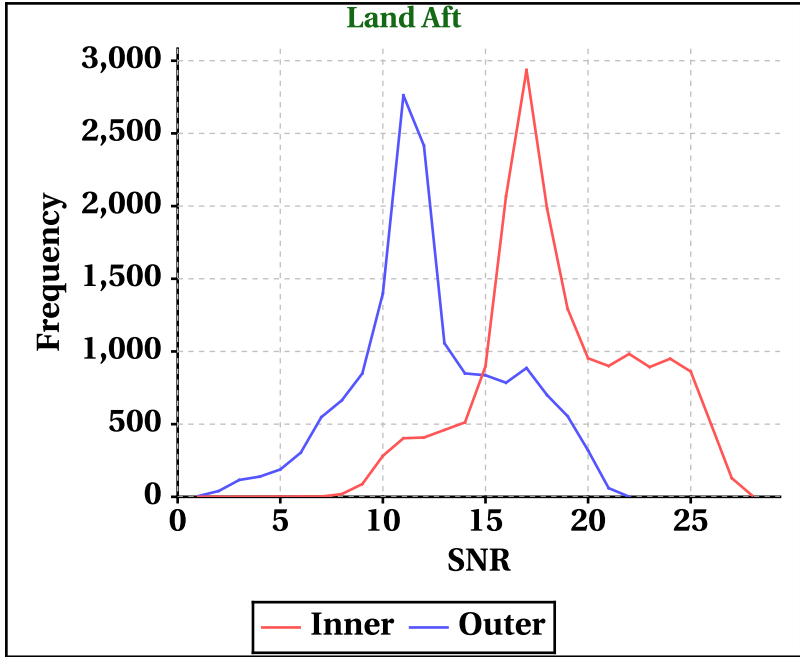


## Orbit-wise behaviour of SNR

**Inner Beam (HH)**

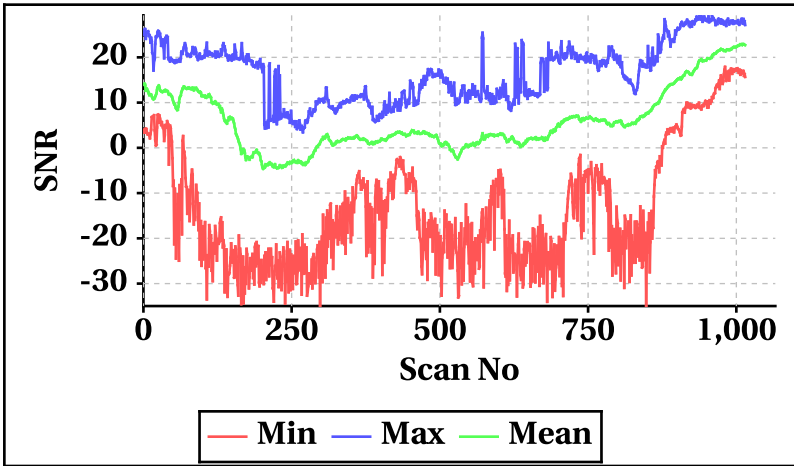


**Outer Beam(VV)**

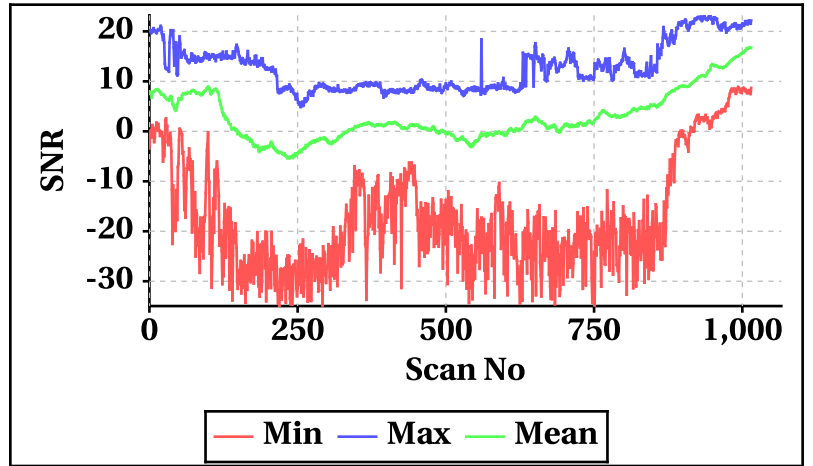


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


**Inner Beam(HH)**

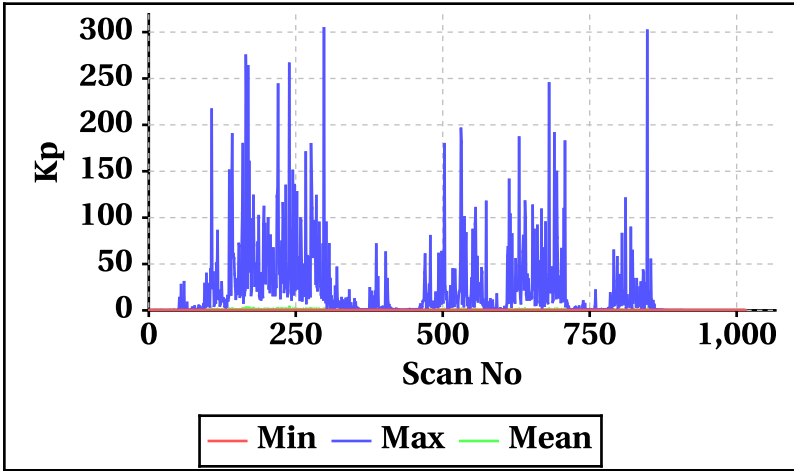


**Outer Beam(VV)**

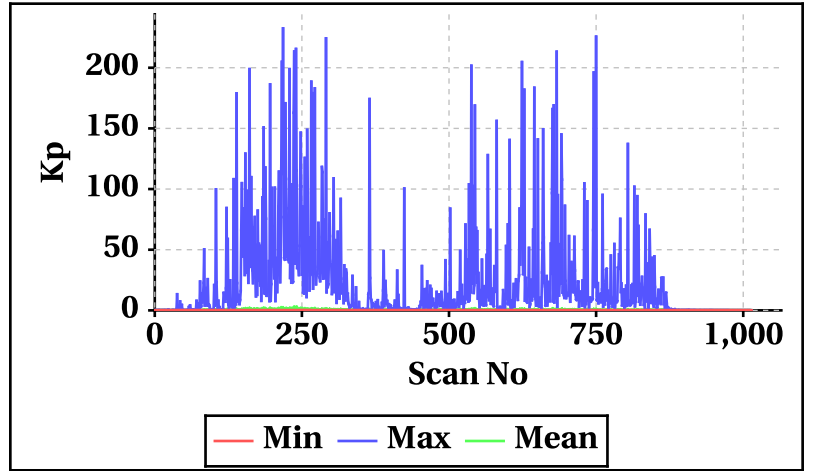


**Inner Beam(HH)**

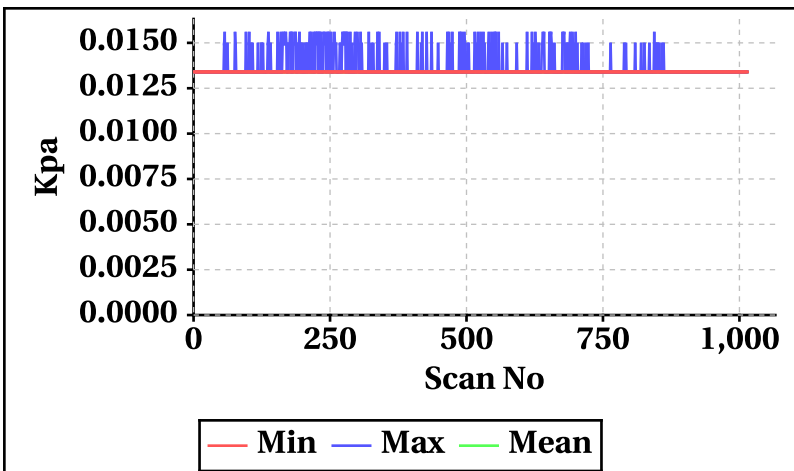


**Outer Beam(VV)**

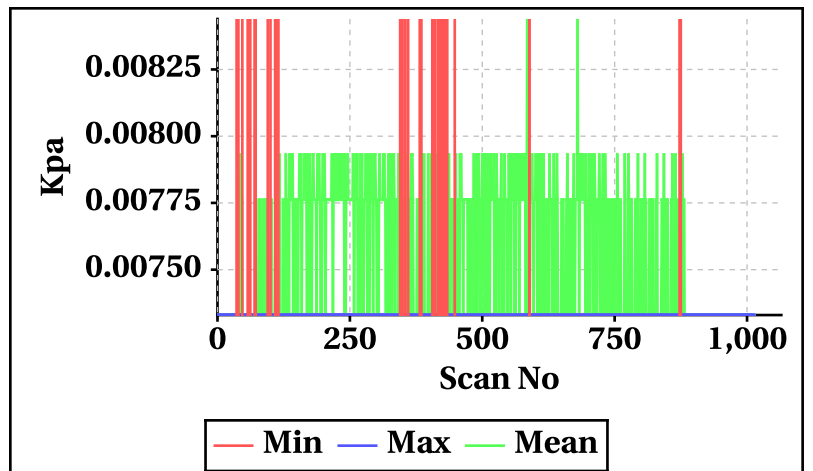


**Inner Beam(HH)**

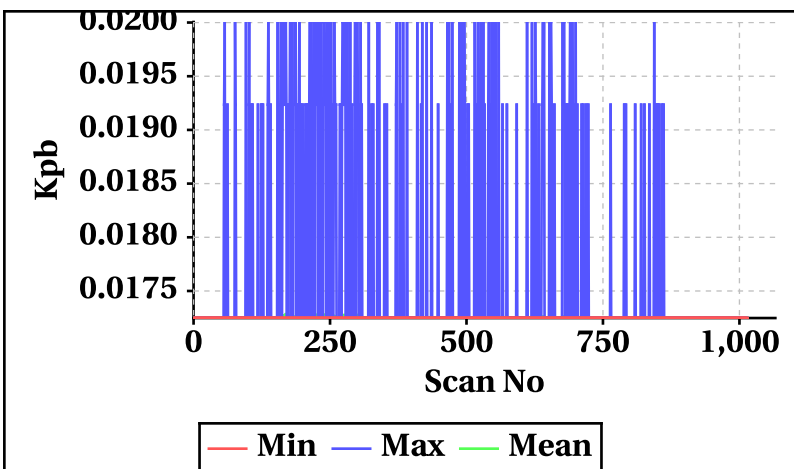


**Outer Beam(VV)**

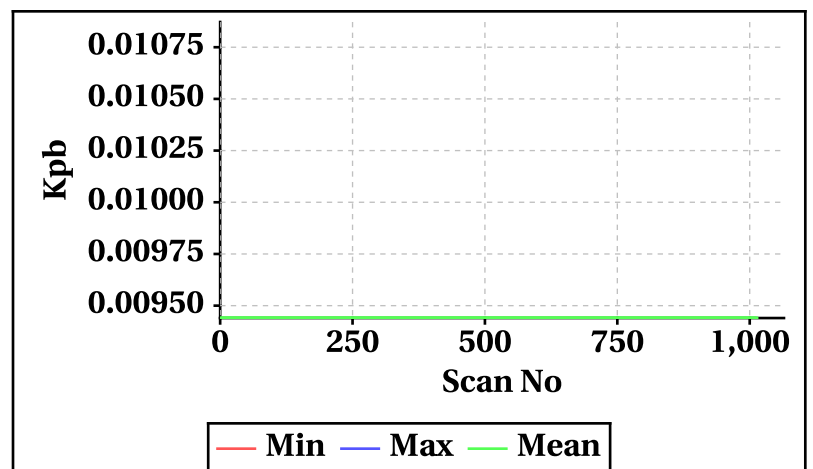

**Inner Beam(HH)**

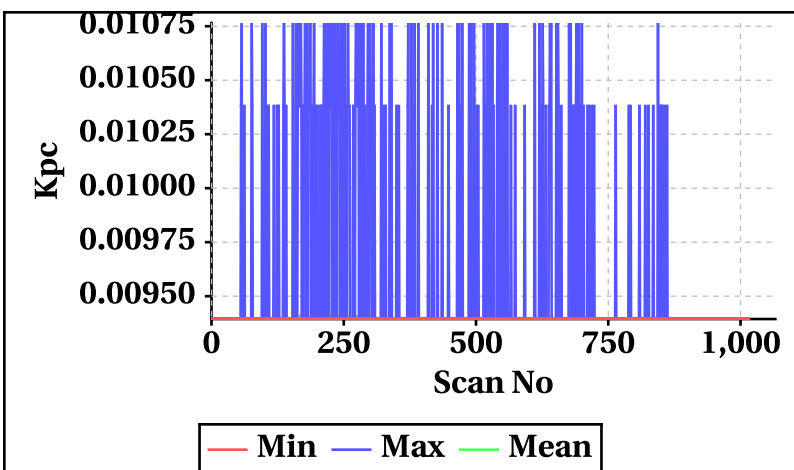


**Outer Beam(VV)**

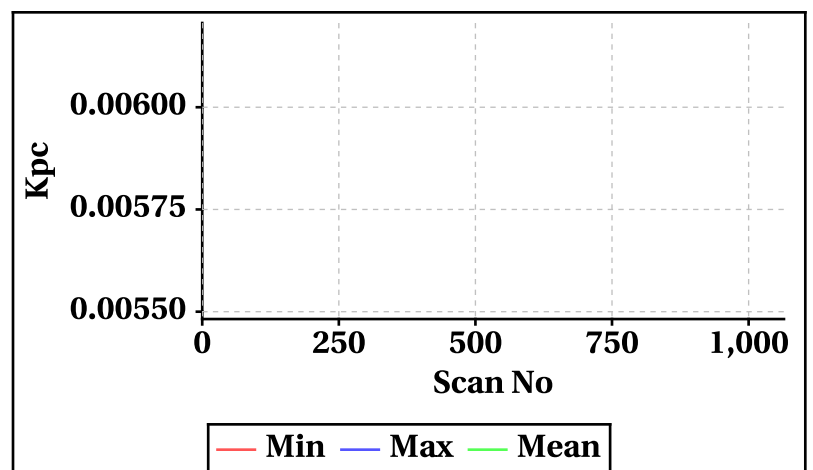




Orbit-wise behaviour of Incidence, Azimuth, Range, X-Factor


Inner Beam (HH)

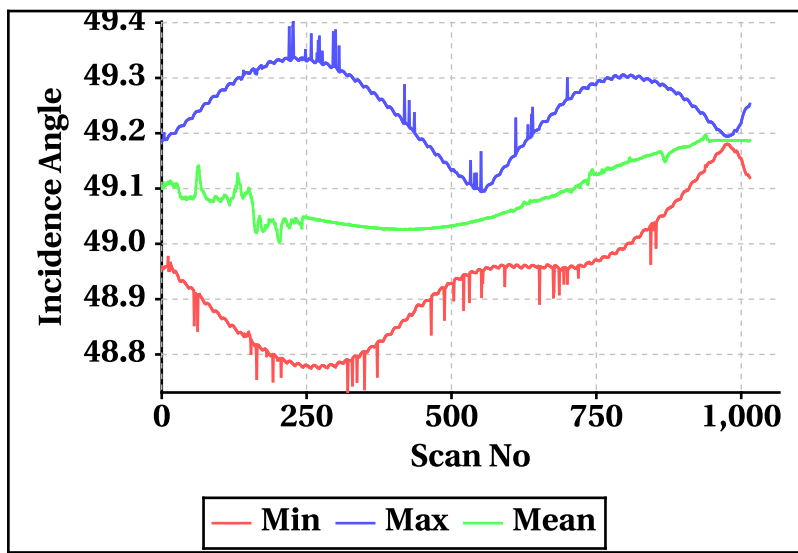


Outer Beam(VV)

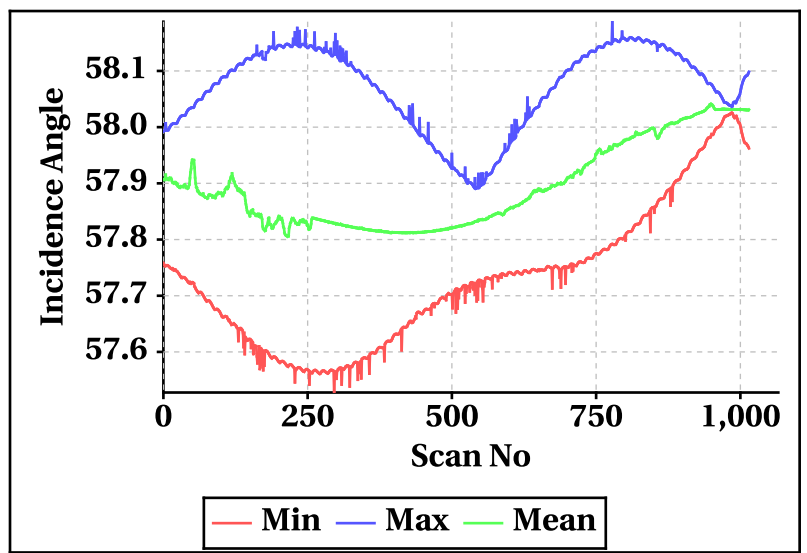


Inner Beam (HH)

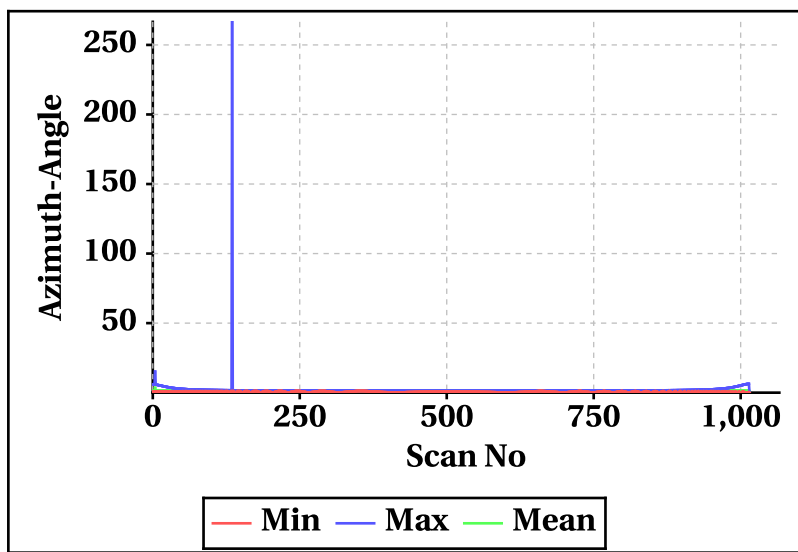


Outer Beam(VV)

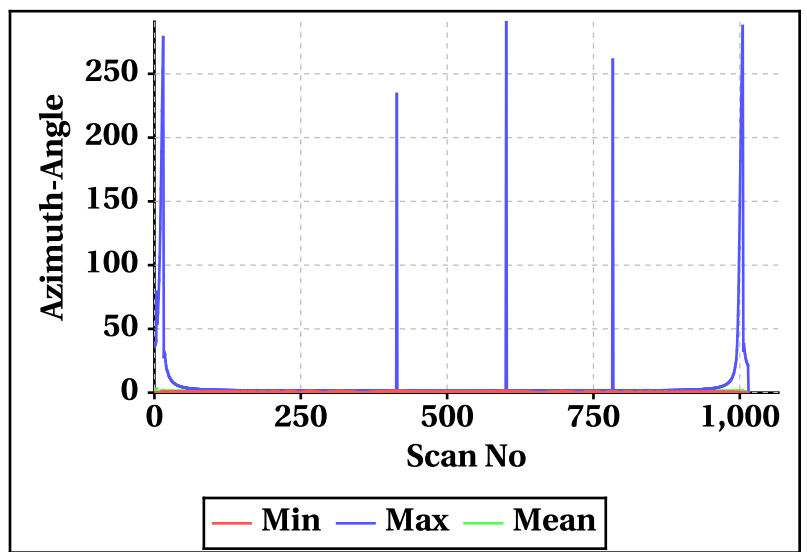


Inner Beam (HH)

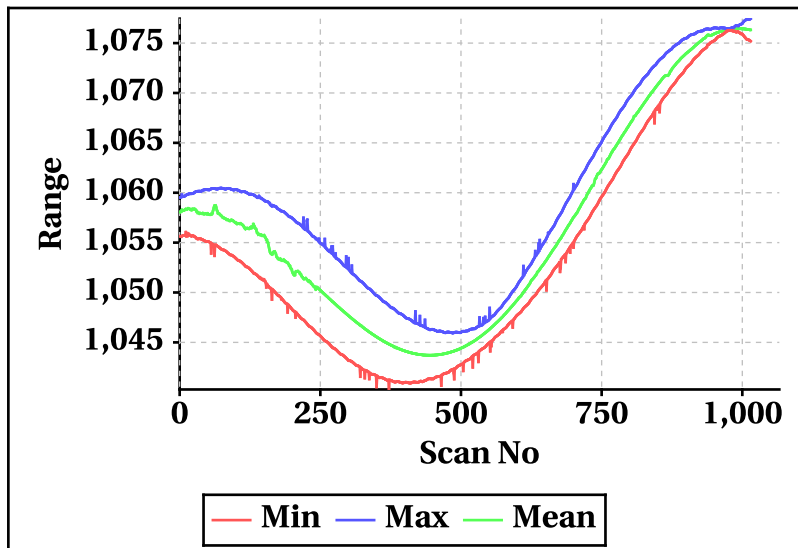


Outer Beam(VV)

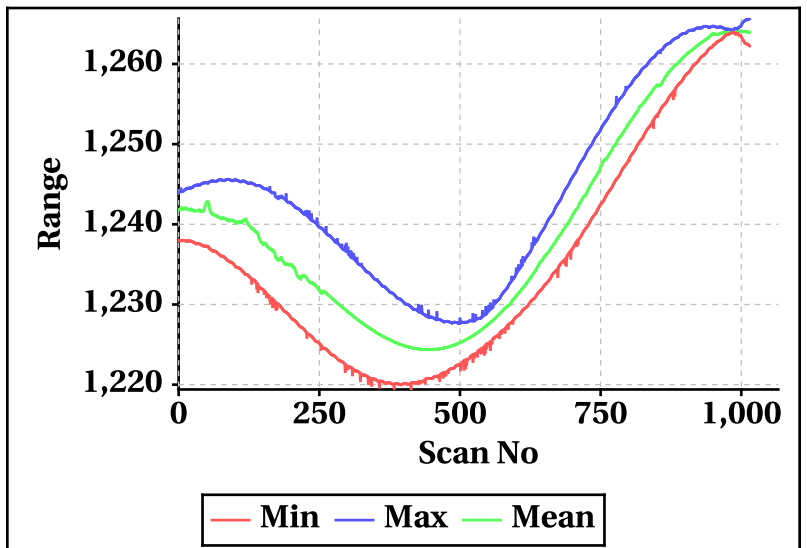

Inner Beam (HH)

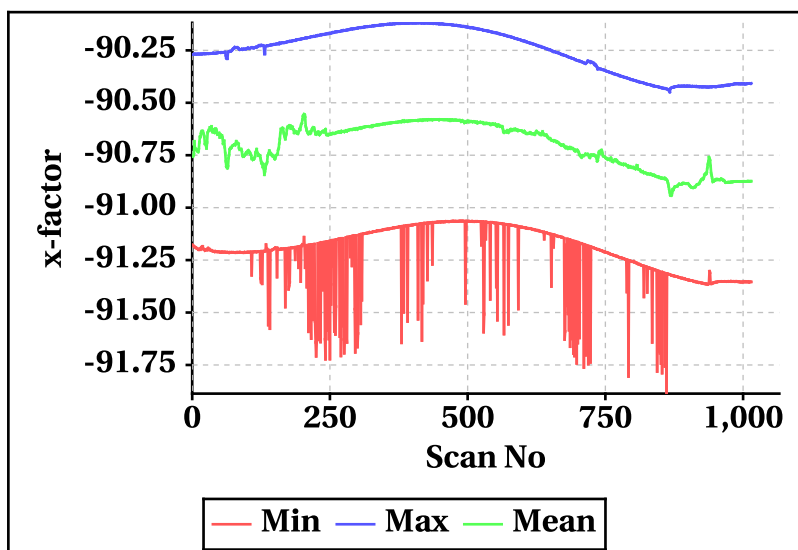

Outer Beam(VV)

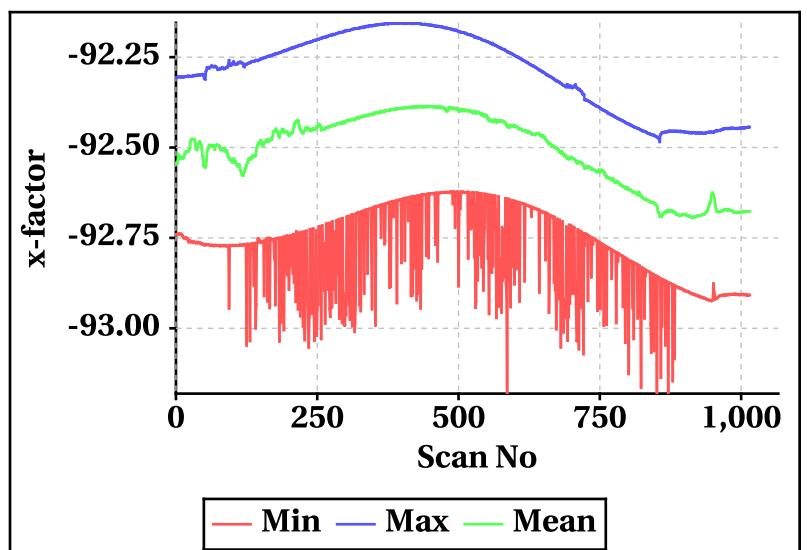


# Doppler Frequency Variation

Doppler Frequency(KHz) variation statistics Over the half Orbit

	Inner Beam (HH)	Outer Beam (VV)
Min	-463.94	-519.72
Max	462.36	518.30


Footprint wise Doppler frequency variation Inner Beam (HH)

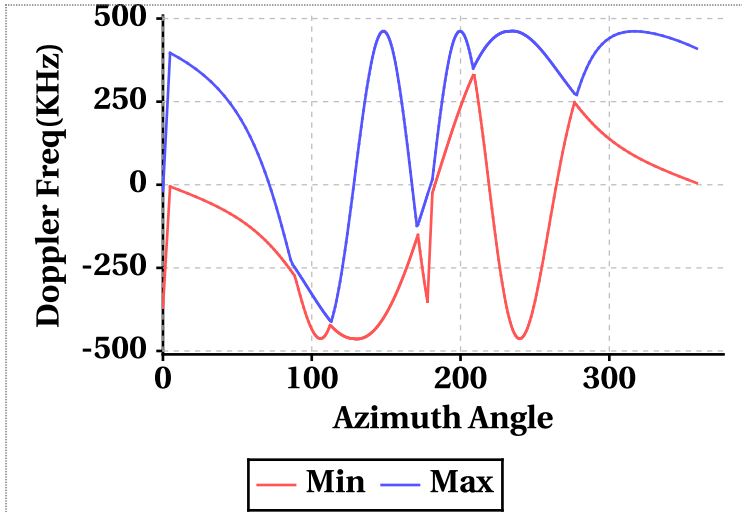


Doppler Frequency(KHz) variation

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	-24.48	16.34	-12.92	-32.90	3.22	-20.00
Doppler_70	-385.44	461.56	459.95	-423.18	517.26	515.24
Doppler_140	15.26	421.66	35.64	11.36	466.18	34.23
Doppler_210	-462.16	-67.30	-460.52	-518.08	-59.98	-516.47
Doppler_280	-368.52	-19.08	-39.71	-422.02	-15.50	-38.54


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)

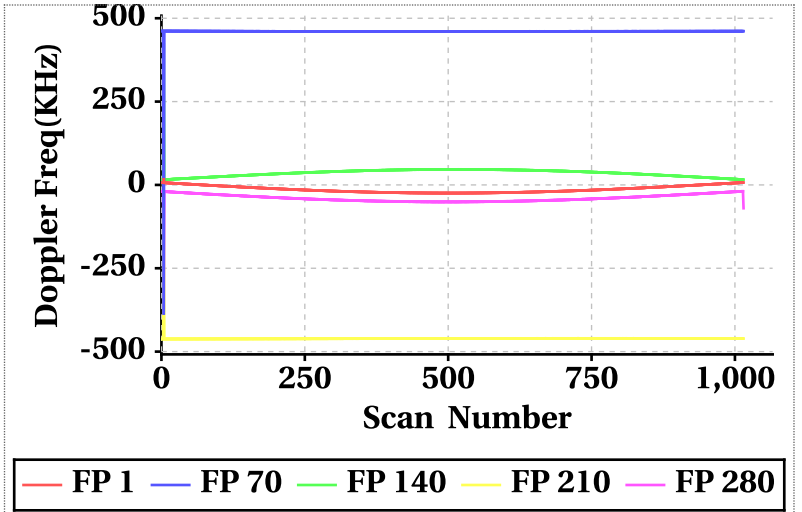

Footprint wise Doppler frequency variation Outer Beam (VV)

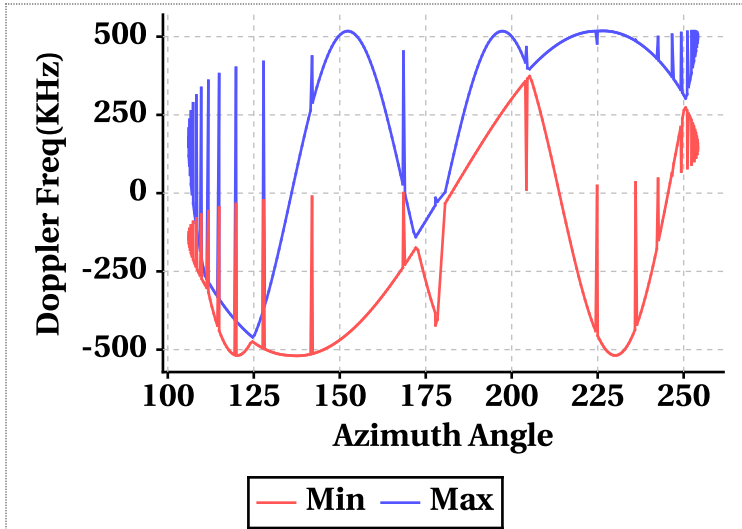


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)

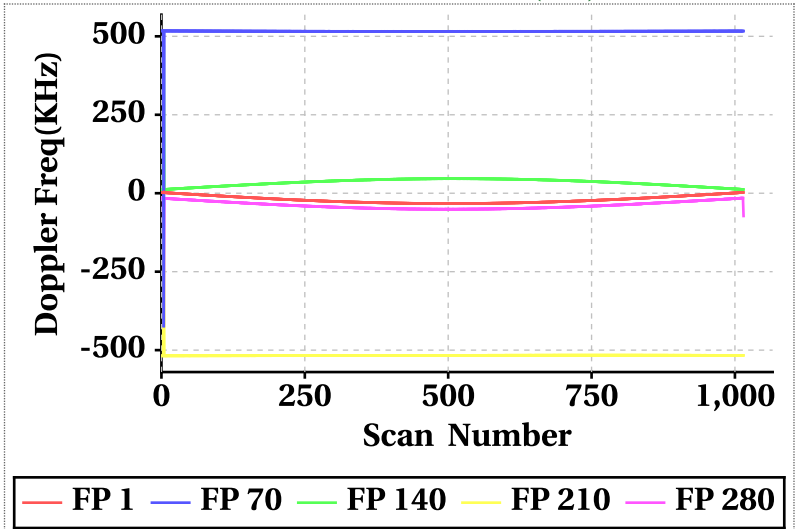


# Latitude Vs Doppler Frequency

Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]

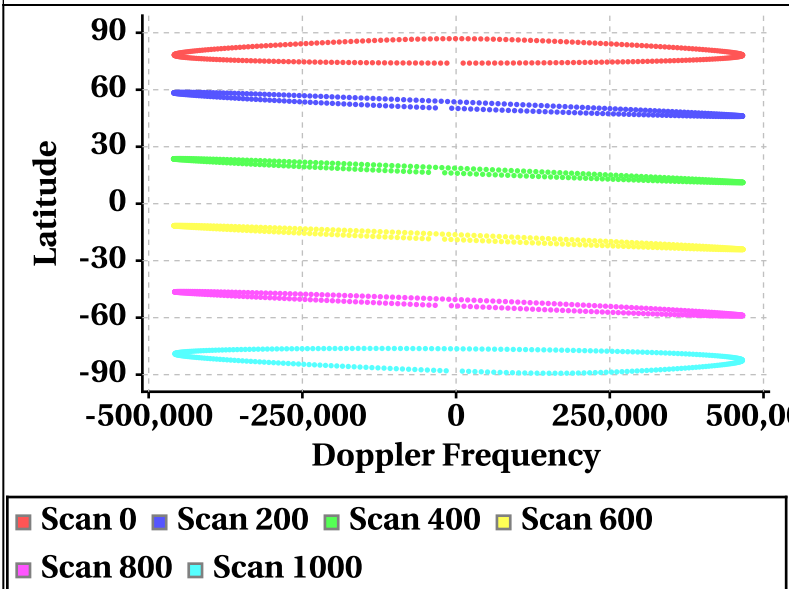


Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]

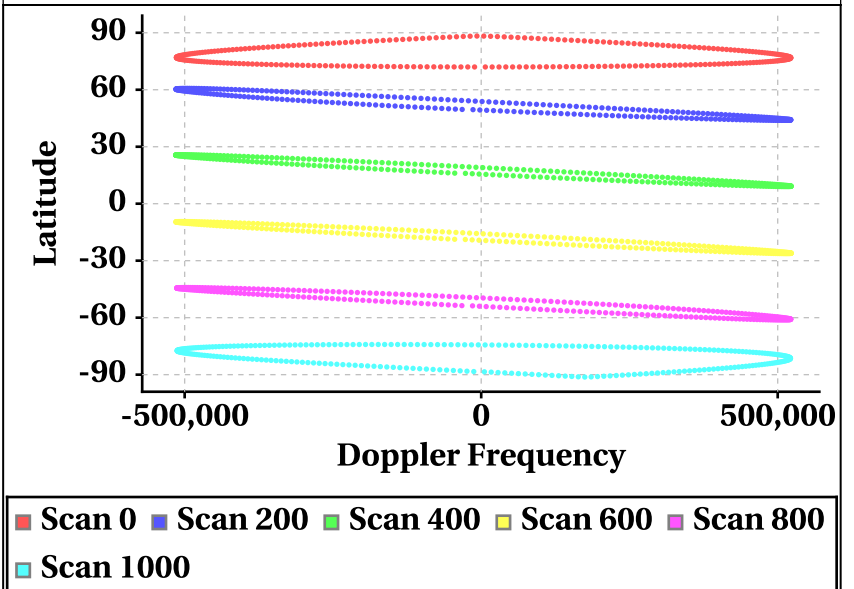

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

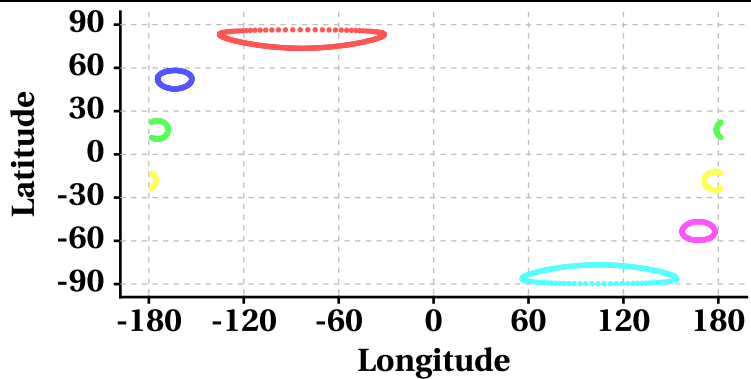

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Scan Trace [Outer Beam (VV)]

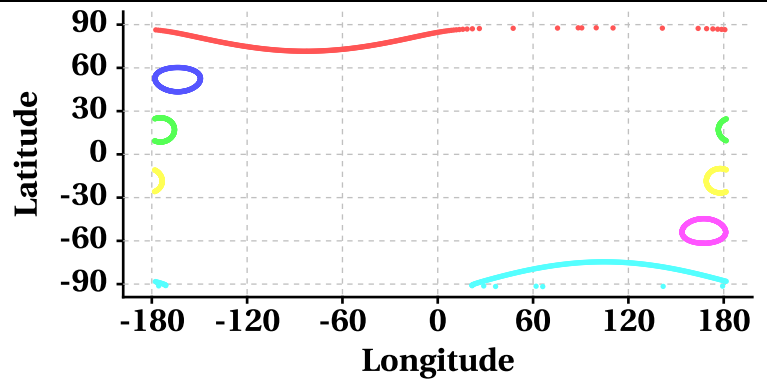

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

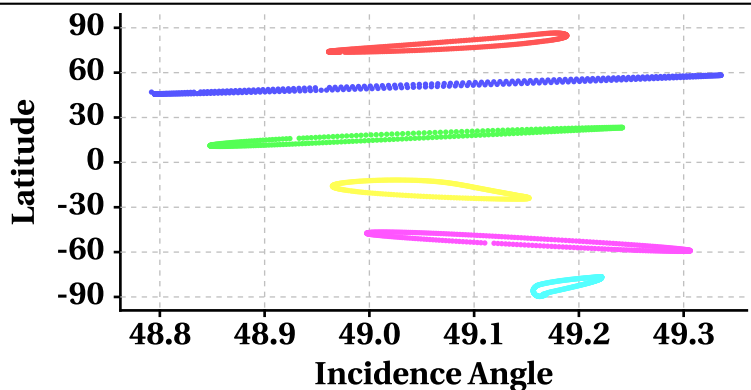

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

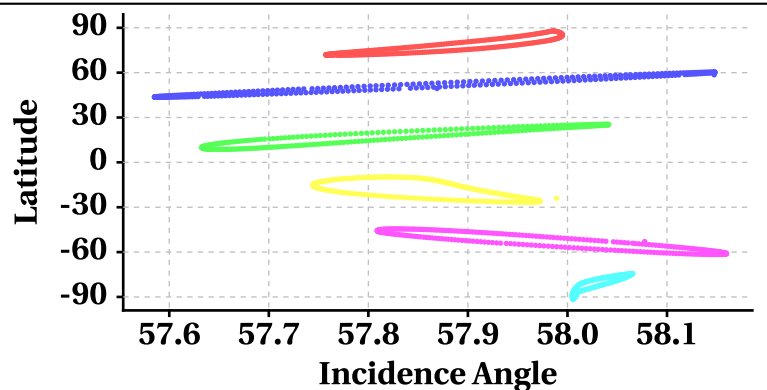

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

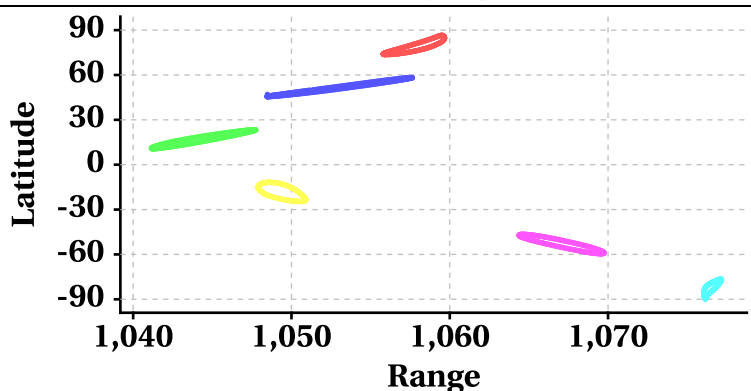

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

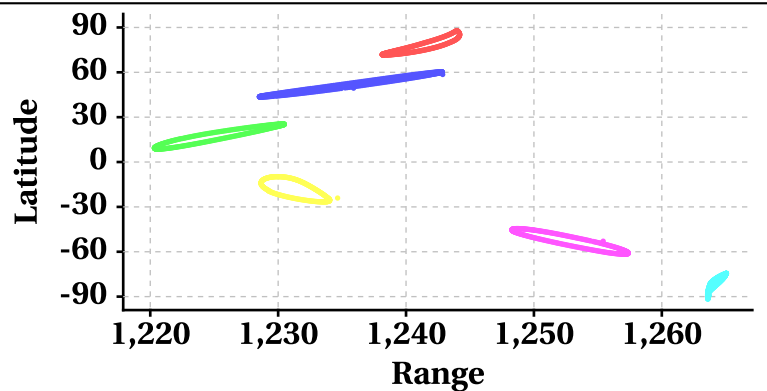

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000



# Variation in Orbit and Attitude Parameters

