


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents

- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	19445	<b>Total Scans</b>	1016
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	19446	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	v1.1.4	<b>Rev. Number</b>	19445_19446	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	NS	<b>Data Production Date</b>	29-05-2020	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	29-05-2020	<b>Equator Crossing Time</b>	06:14:30.000	<b>No Of Outer Slices</b>	15



## Brightness Temperature(k) Footprint trace

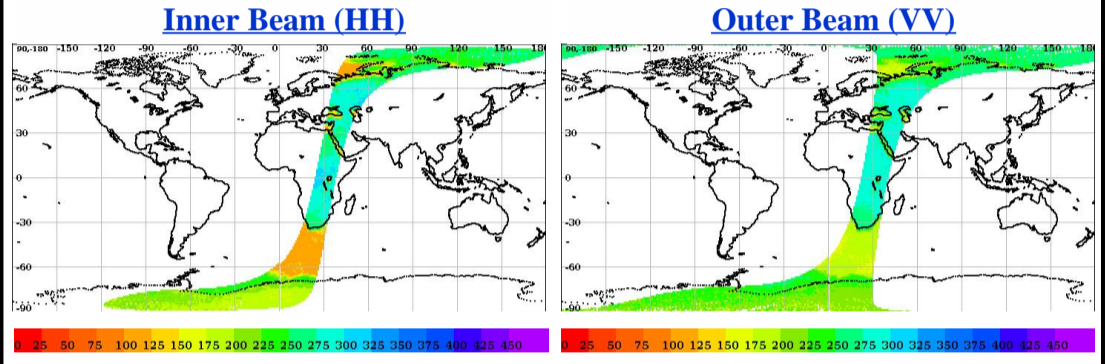


## Image Snapshot for Inner & Outer Beam

Inner (HH)

Outer (VV)



## Sigma0(dB) Footprint trace

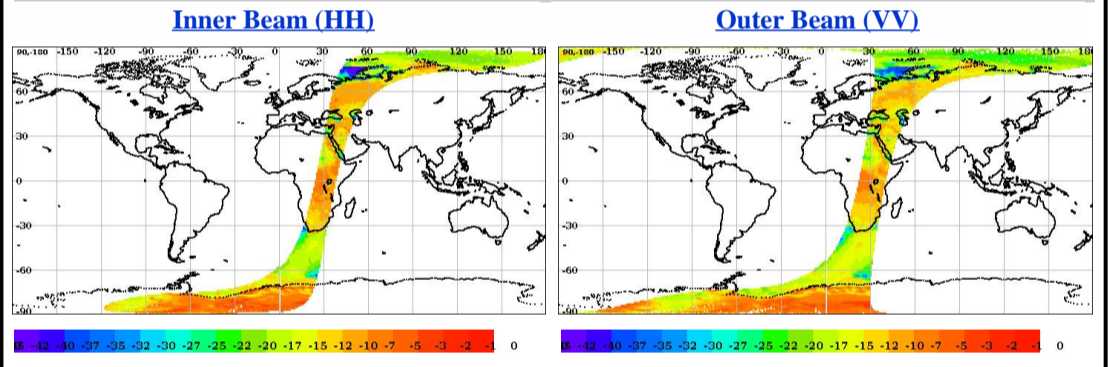


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.05	0.05
Data Not Available From Payload (%)	100.0	100.0
Slice not within sample array limits (%)	0.00	0.00
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	22.21	13.33
Noise samples for blending Saturated	0.0	0.015707
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	0.01279	0.034904


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

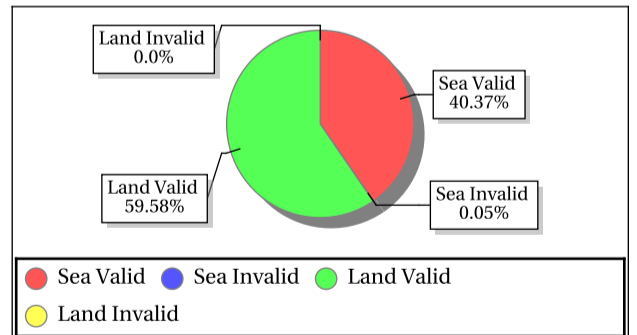

### Outer Beam (VV)

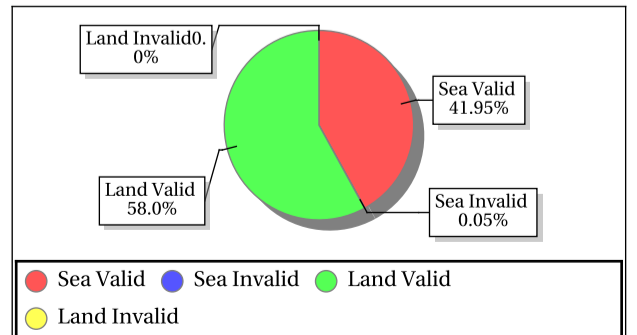

## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.12	298.49	0.29	2.332	0.12	198.74	0.27	2.535	0.12	14.64	0.12	0.010	0.12	6.99	0.12	0.008
<b>Kpa</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.02	0.01	0.000
<b>Kpb</b>	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.88	22.31	8.70	0.012	-33.12	23.65	9.79	0.045	-21.77	28.75	17.28	4.249	-18.53	29.78	18.11	8.513

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.09	205.12	0.24	2.240	0.09	204.82	0.26	2.470	0.09	6.81	0.09	0.001	0.09	2.73	0.09	0.005
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.42	14.97	4.43	0.000	-34.42	15.35	5.14	0.000	-19.59	22.35	11.54	0.008	-15.55	22.81	12.09	0.022

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)

	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.77	49.35	49.01	0.000	57.56	58.18	57.92	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0026	13.09	1.27	2.586	0.0000	296.88	1.27	3.807	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1041.68	1078.32	1057.31	0.000	1220.87	1266.60	1241.72	0.000	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.38	-89.71	-90.20	0.000	-92.98	-91.76	-92.04	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	15.86	16.41	16.00	0.000	20.90	22.82	21.08	2.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.19	1029.58	21.67	2.000	17.75	1353.91	22.21	2.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



## Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

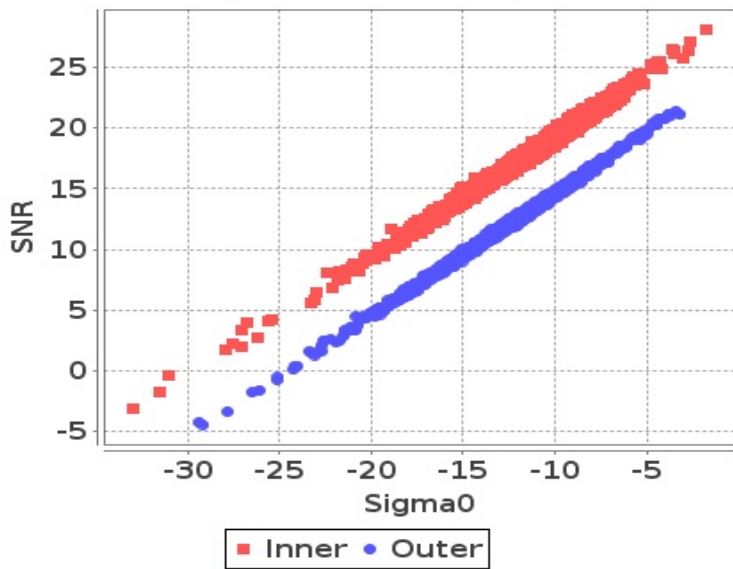


Footprint-Sea

Sigma0 Vs SNR (Sea)

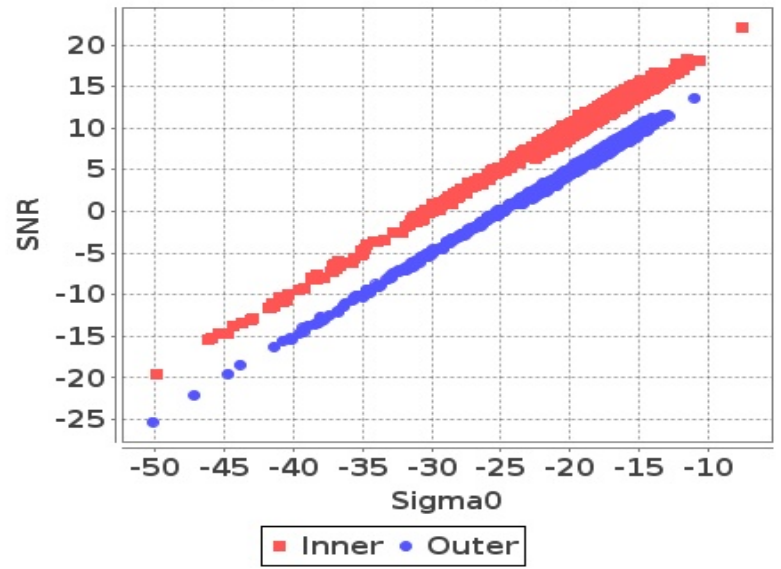


Slice-Land

Sigma0 Vs SNRatSlice (Land)

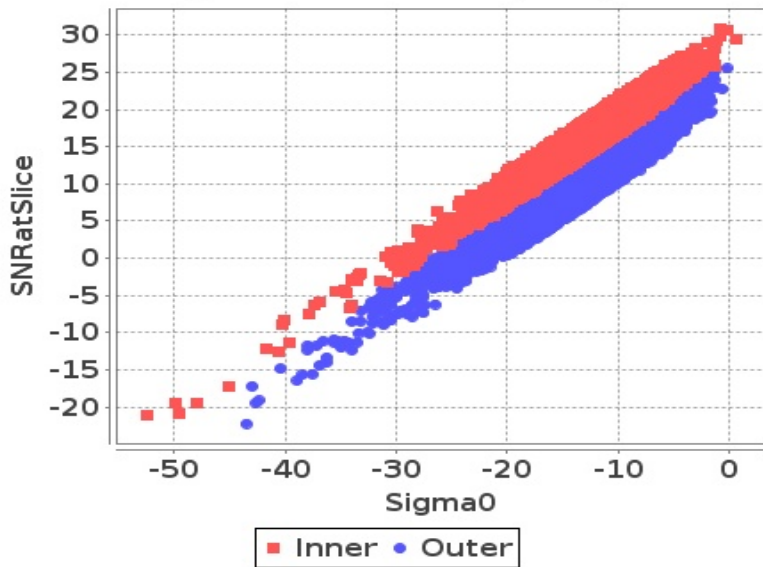

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

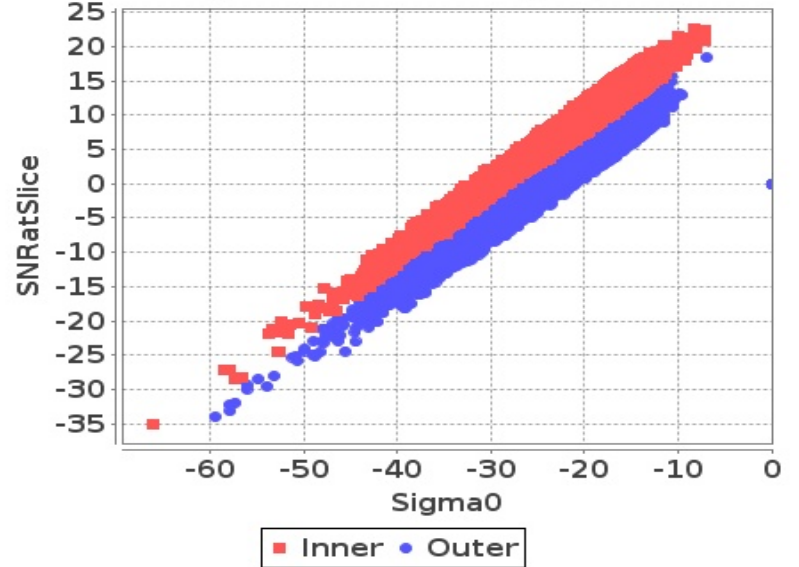

## Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

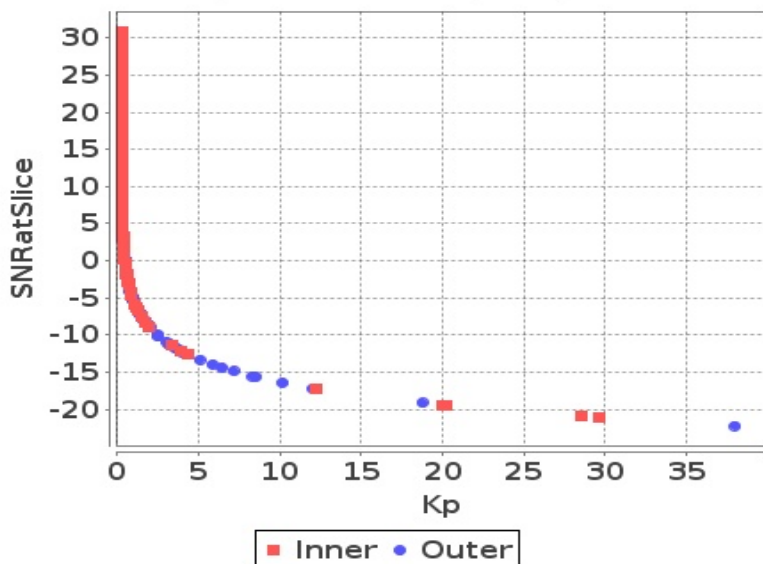

Slice


Kp Vs SNRatSlice (Sea)

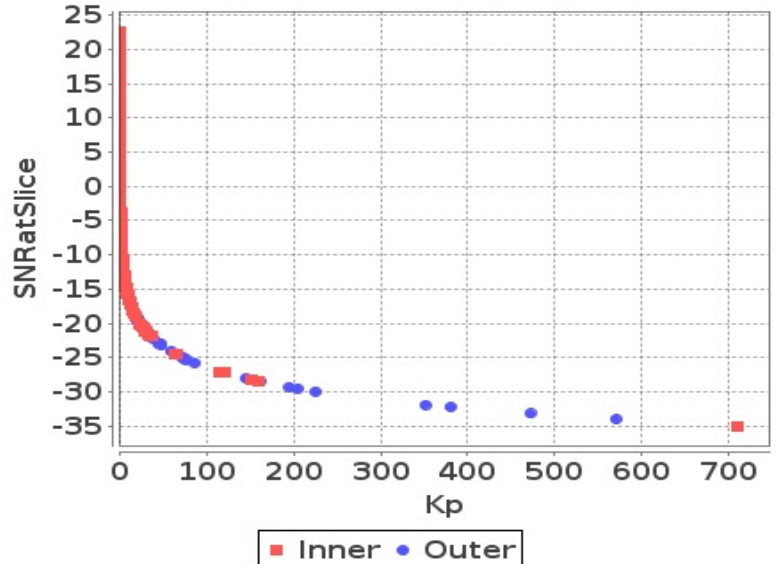

# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

### Sigma0 Vs Kp (Land)

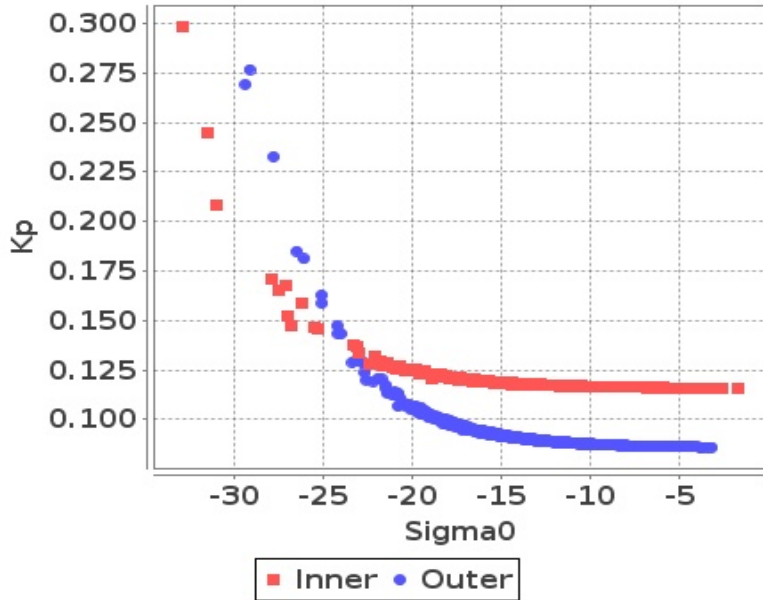


## Footprint-Sea

### Sigma0 Vs Kp (Sea)

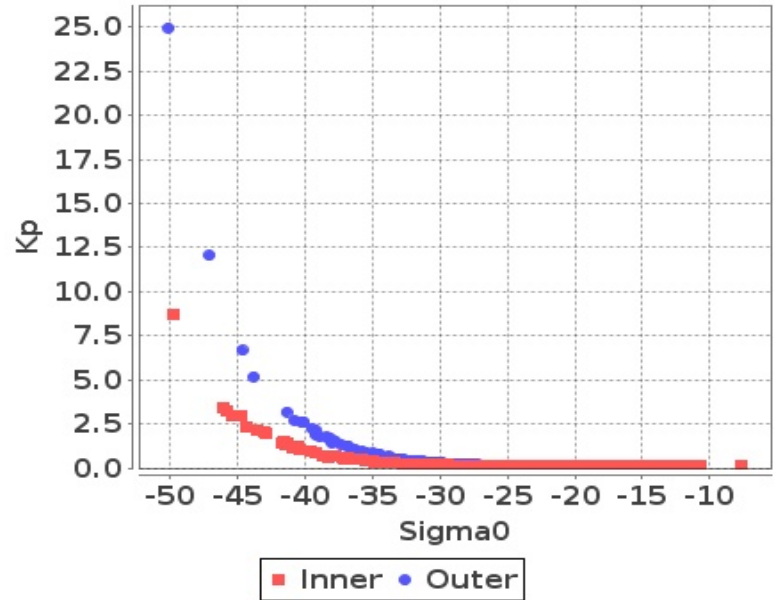


## Slice-Land

### Sigma0 Vs KpatSlice (Land)

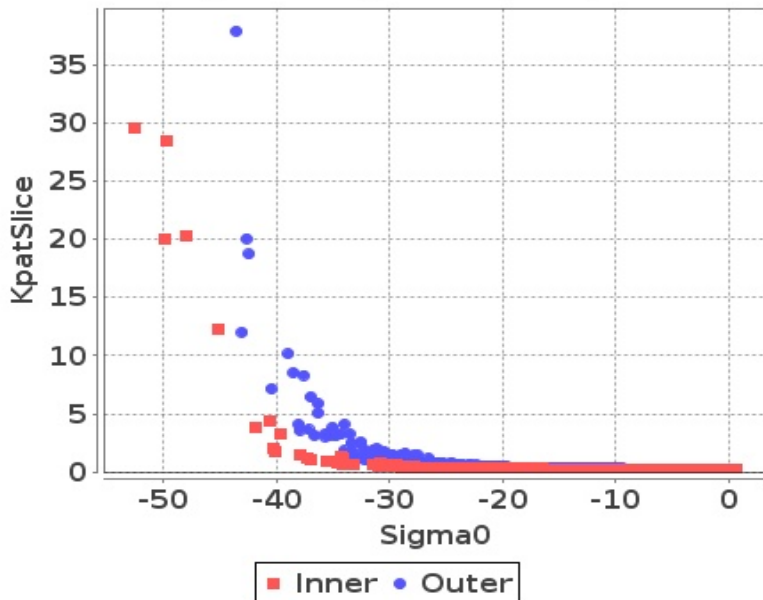

## Slice-Sea

### Sigma0 Vs KpatSlice (Sea)




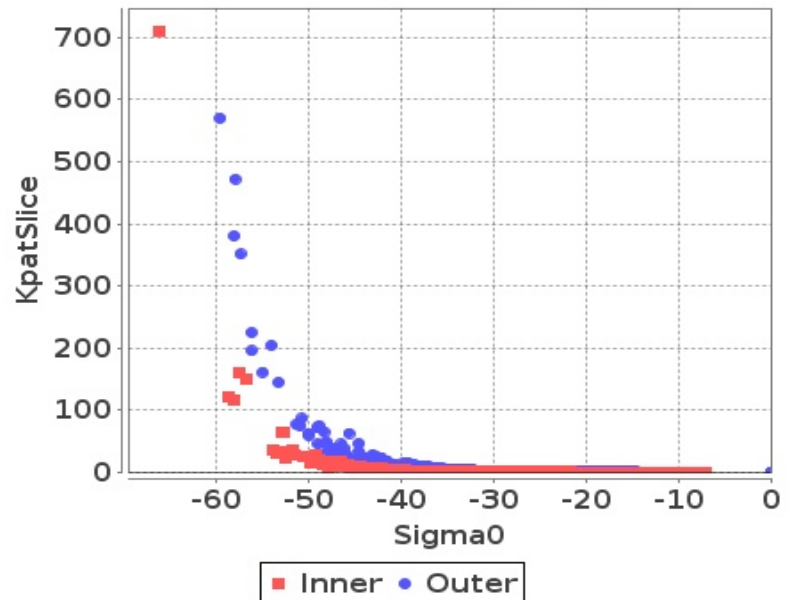


# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-51	-48	-64	-63
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-44	-40	-59	-59
Max	0	0	0	0

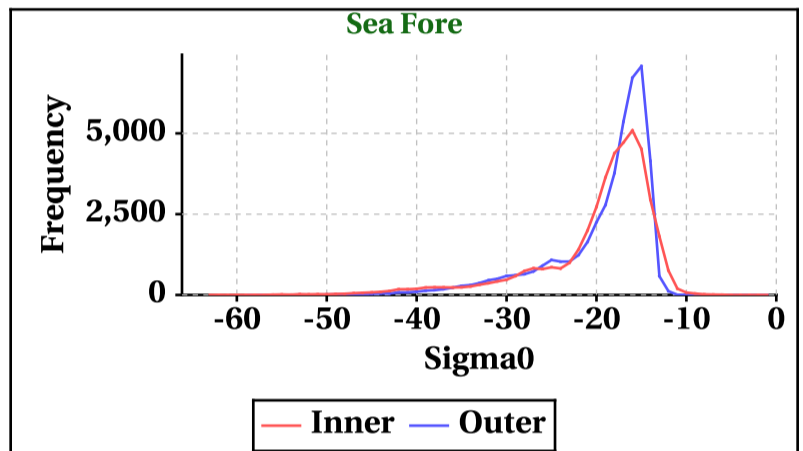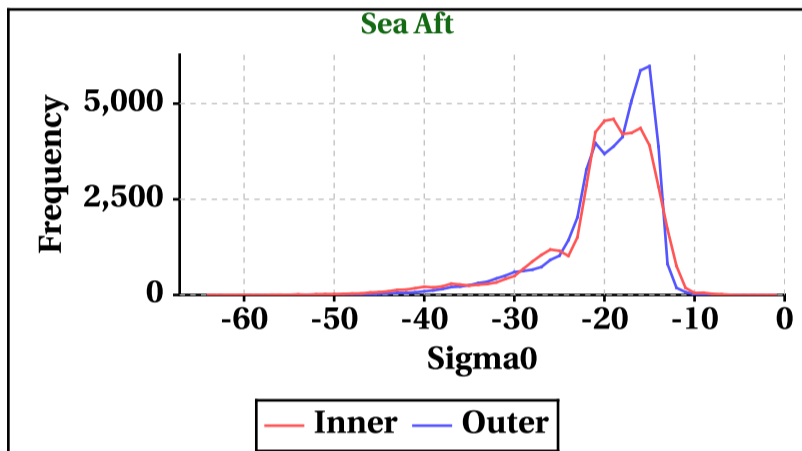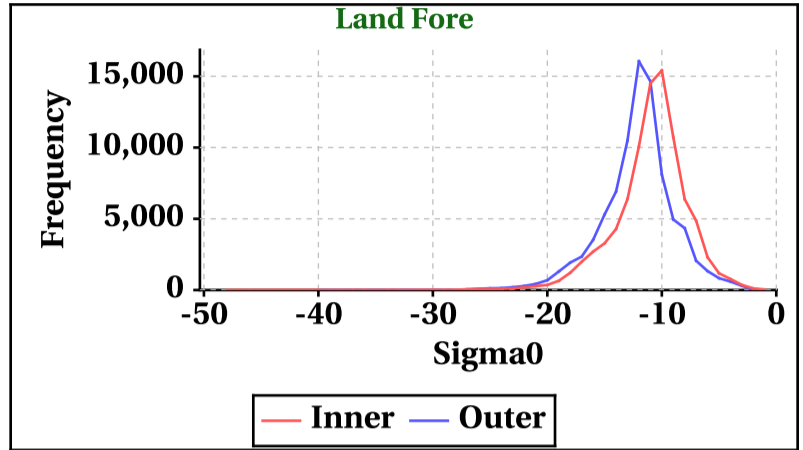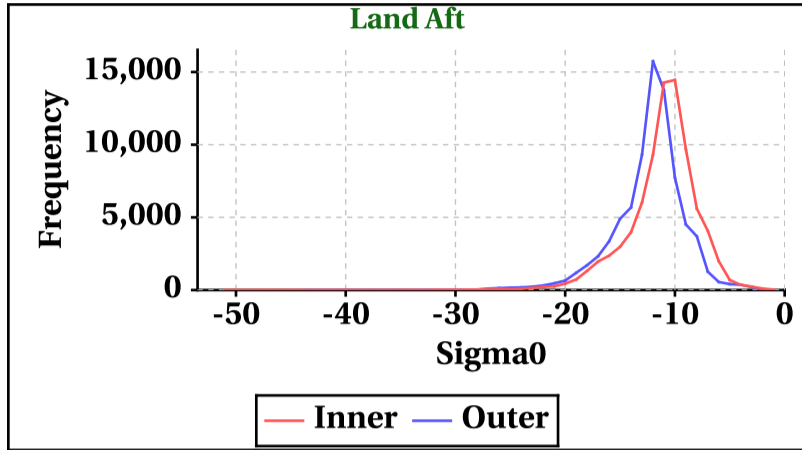

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	377	447	321	320

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	451	520	571	655

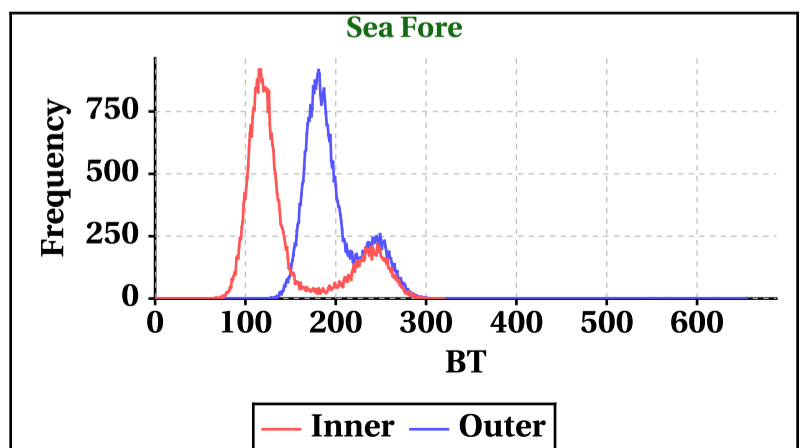
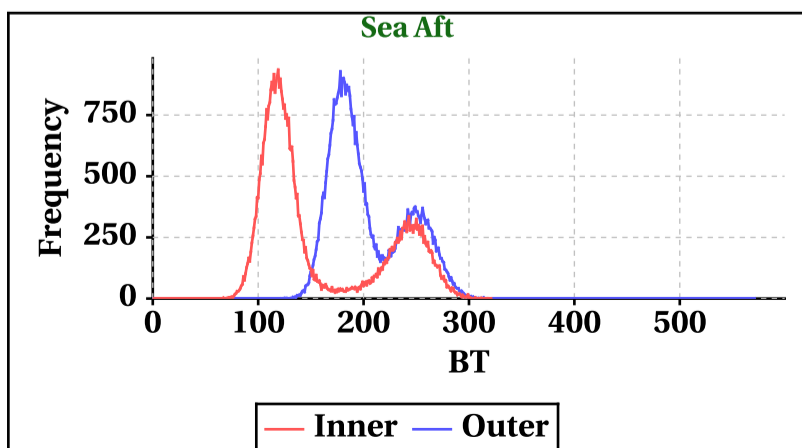
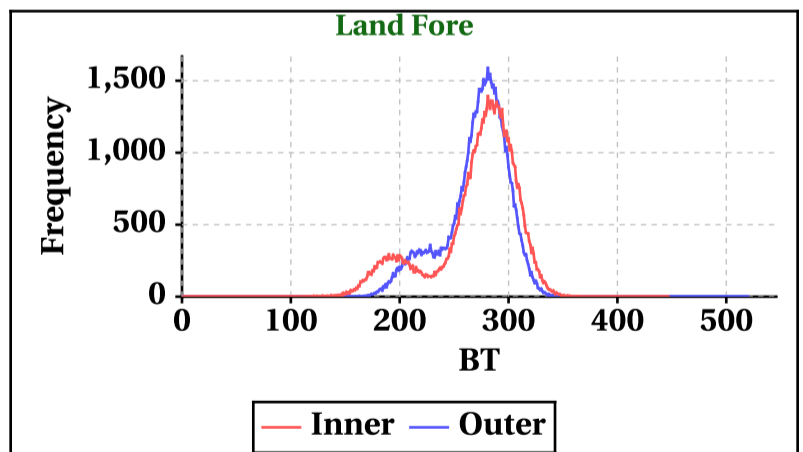
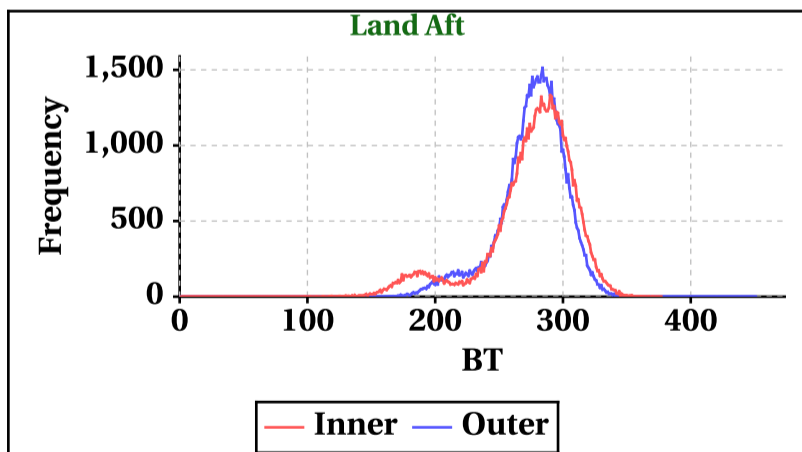


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-21	-18	-34	-33
Max	28	29	22	23

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-19	-15	-34	-34
Max	22	22	14	15

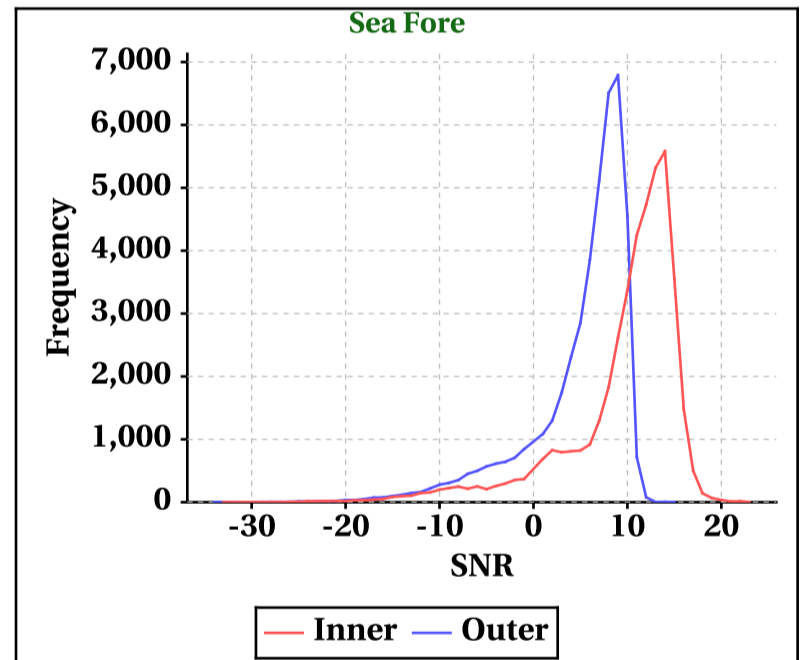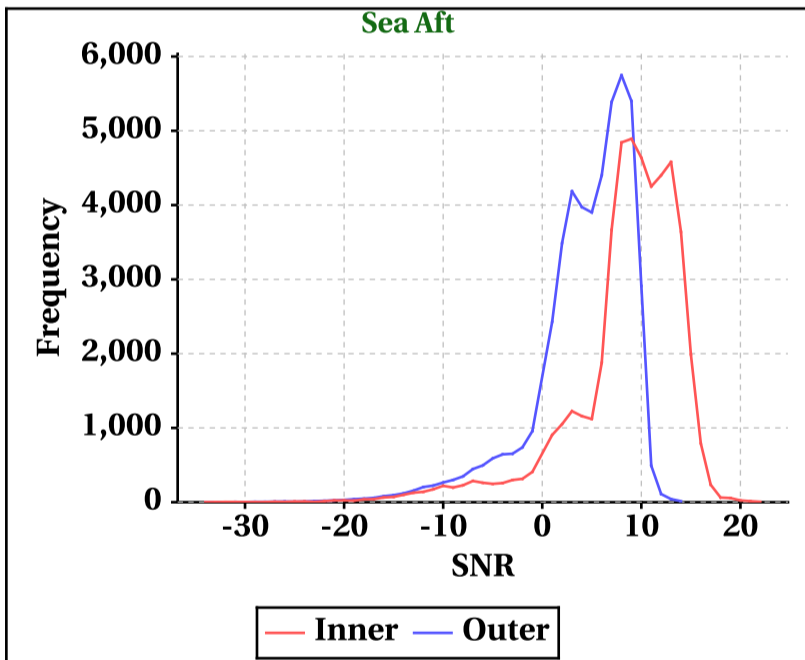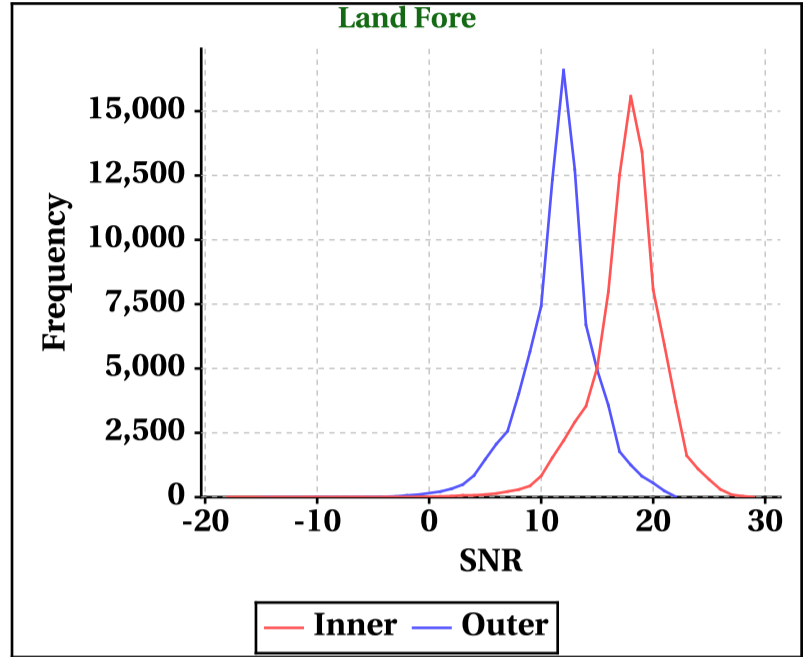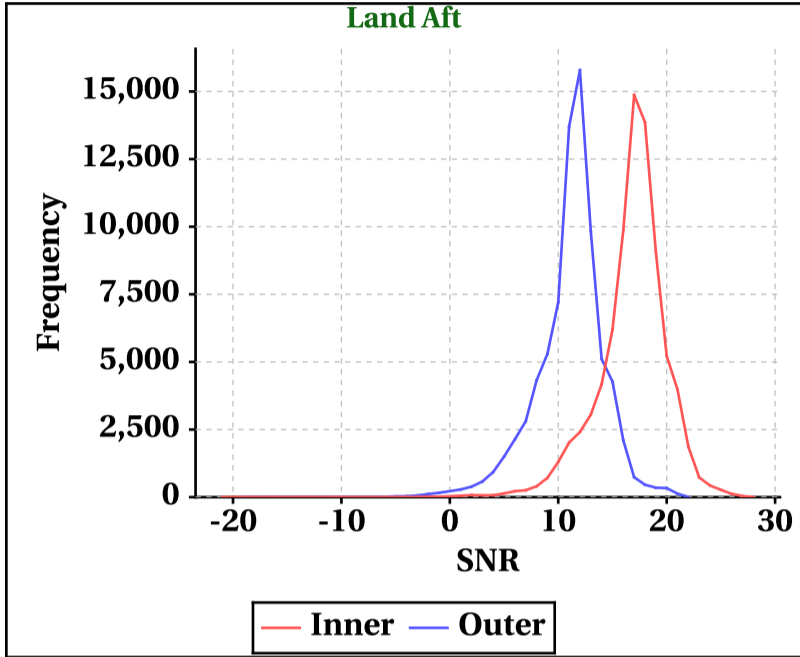


## Orbit-wise behaviour of SNR

Inner Beam (HH)

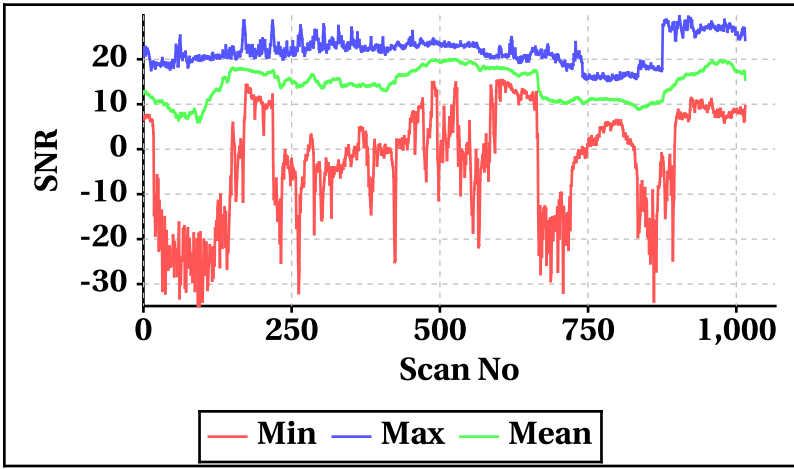


Outer Beam(VV)

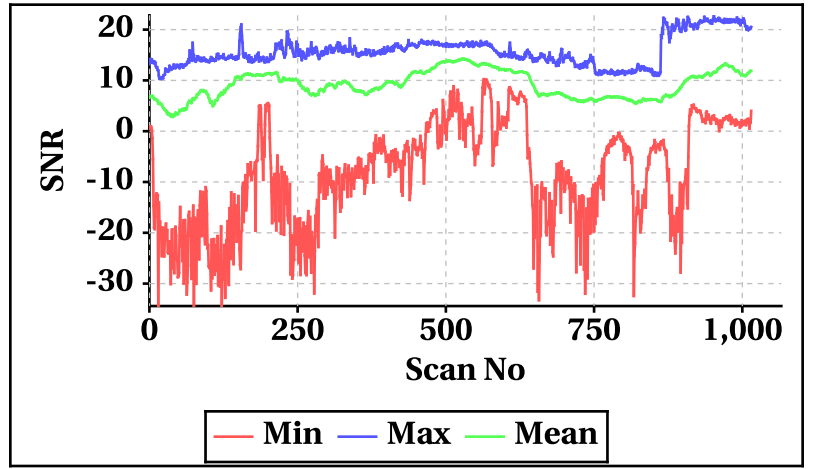


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

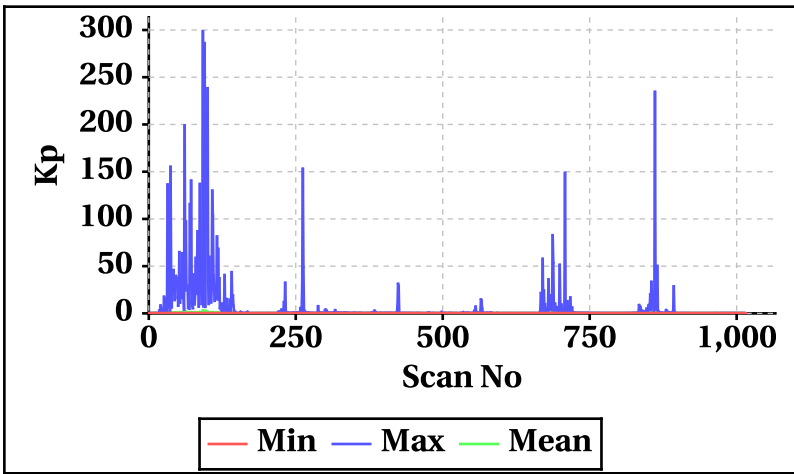


Outer Beam(VV)

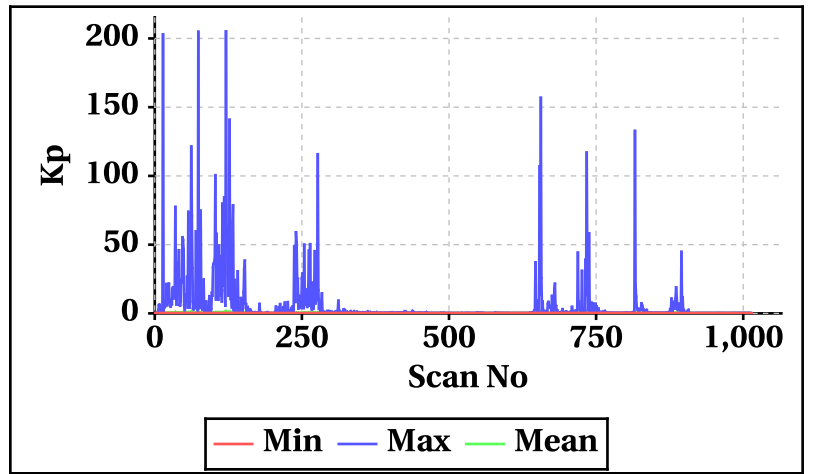


Inner Beam(HH)

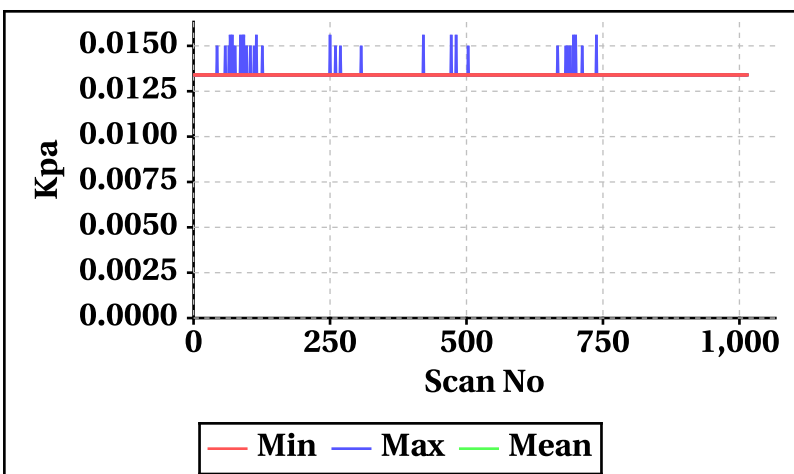


Outer Beam(VV)

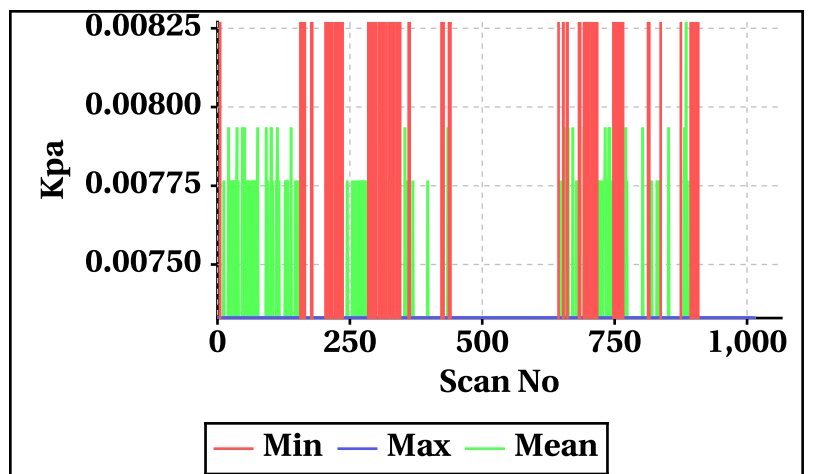


Inner Beam(HH)

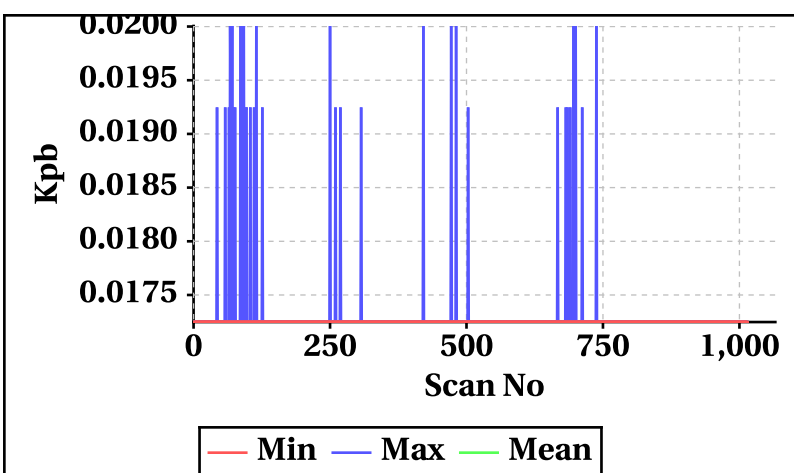


Outer Beam(VV)

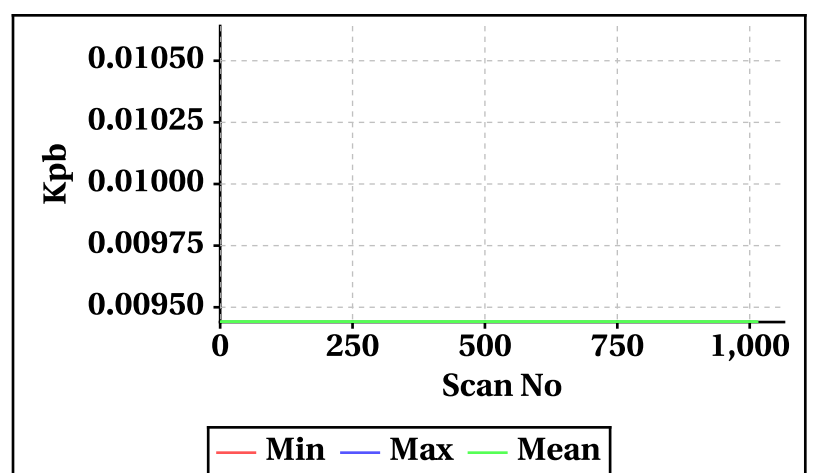

Inner Beam(HH)

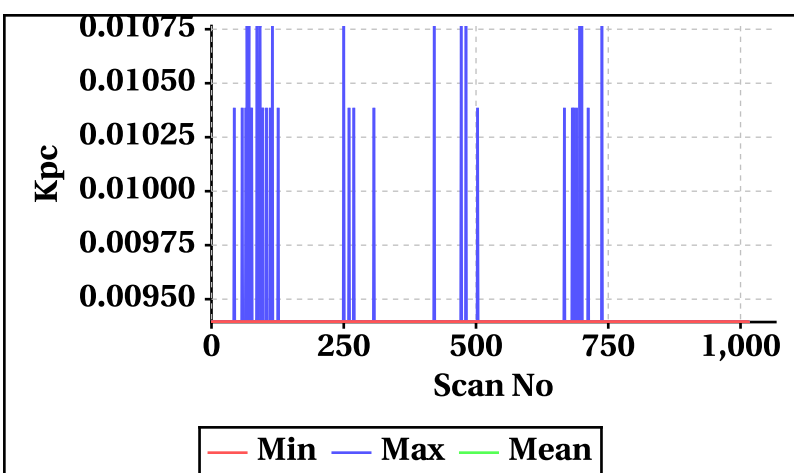


Outer Beam(VV)

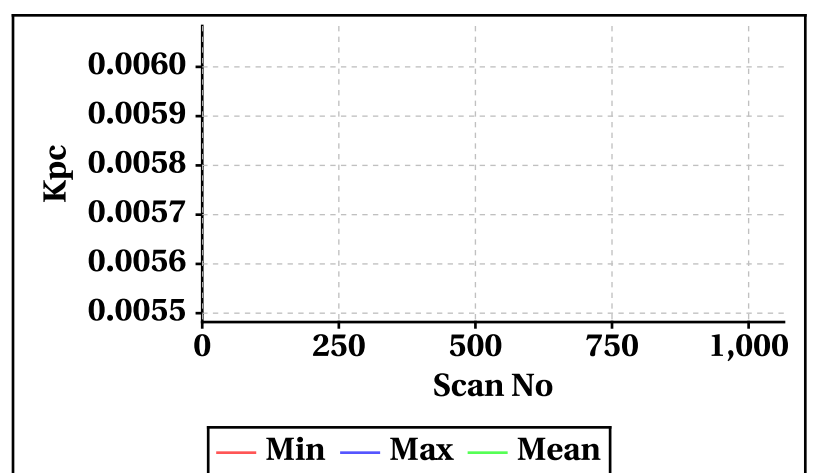


Orbit-wise behaviour of Incidence, Azimuth, Range, X-Factor


Inner Beam (HH)

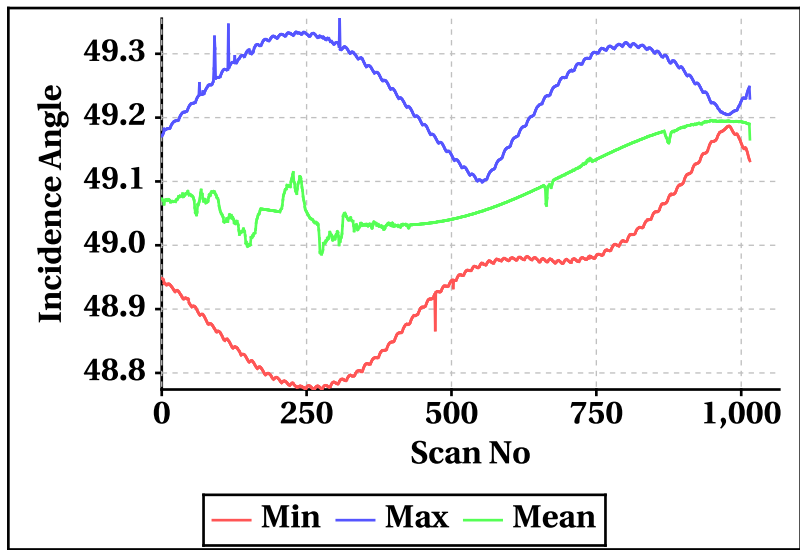


Outer Beam(VV)

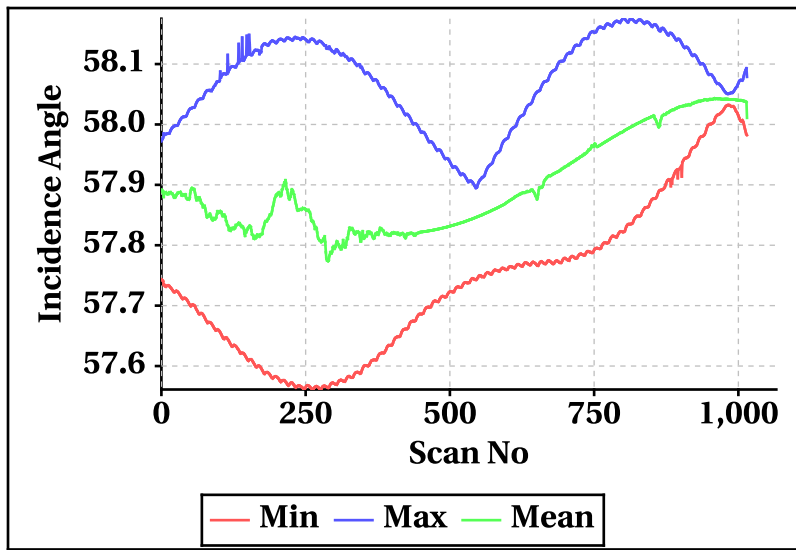


Inner Beam (HH)

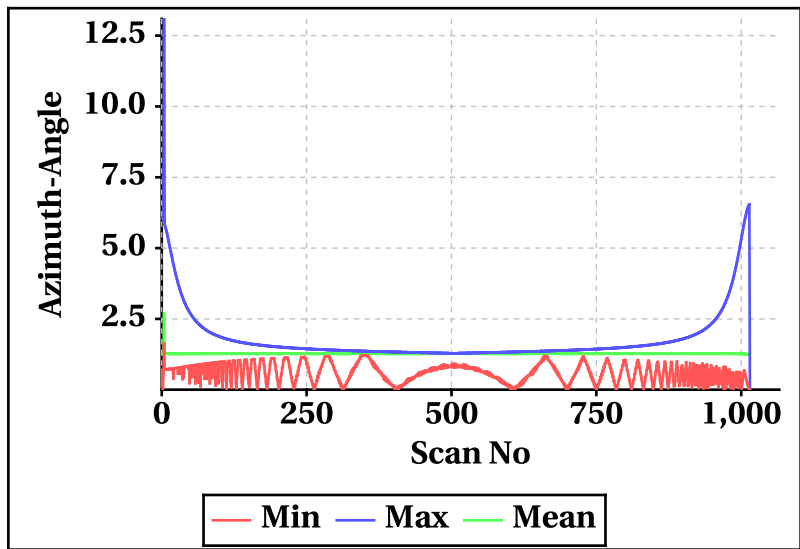


Outer Beam(VV)

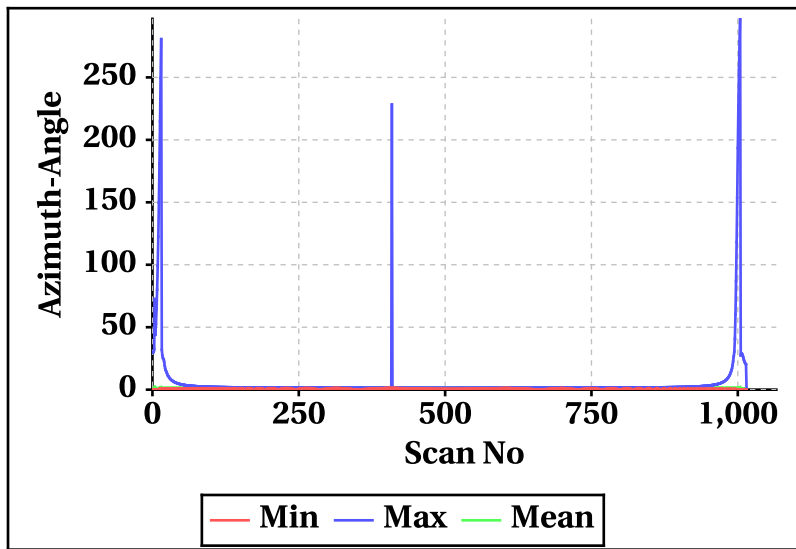


Inner Beam (HH)

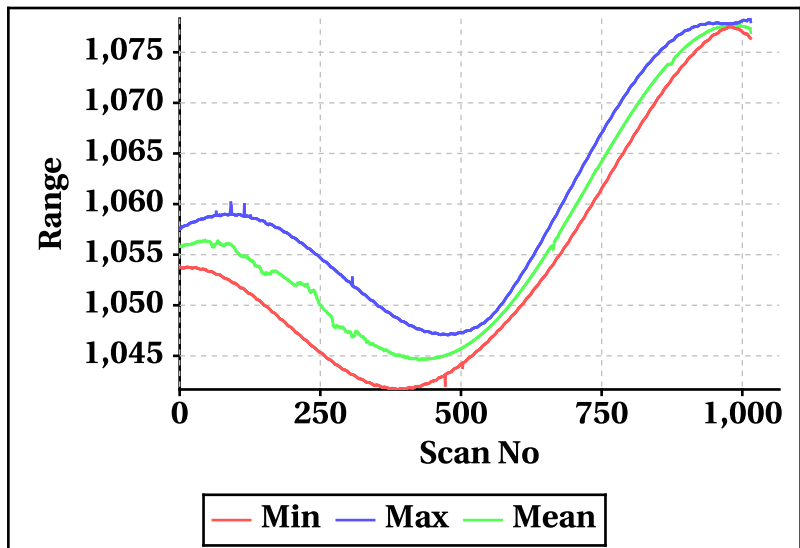


Outer Beam(VV)

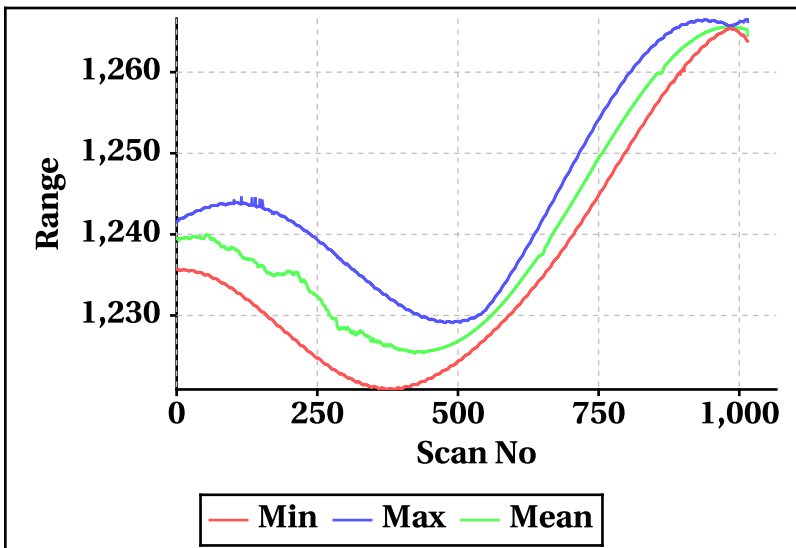

Inner Beam (HH)

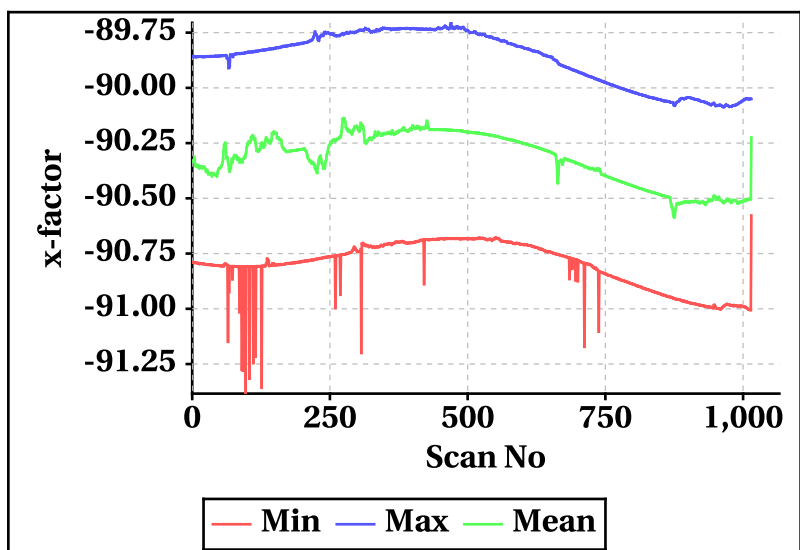

Outer Beam(VV)

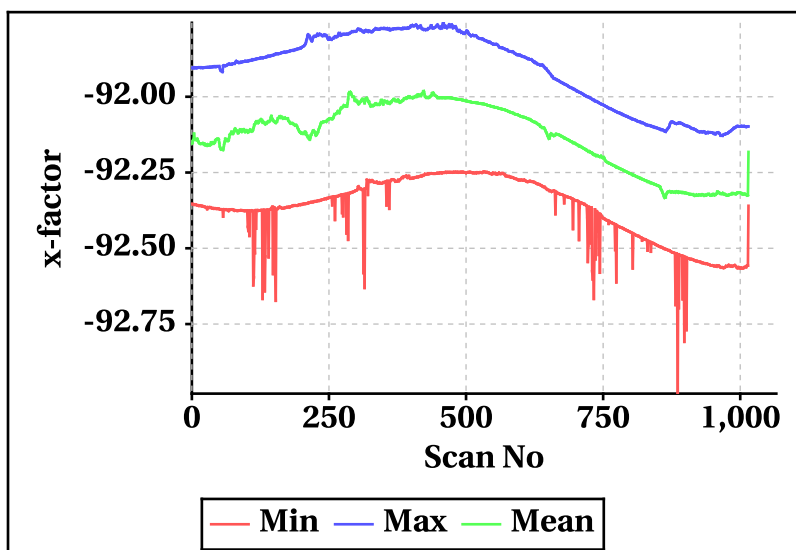




# Doppler Frequency Variation

Doppler Frequency(KHz) variation statistics Over the half Orbit

	Inner Beam (HH)	Outer Beam (VV)
Min	-463.98	-519.72
Max	462.18	518.14


Footprint wise Doppler frequency variation Inner Beam (HH)

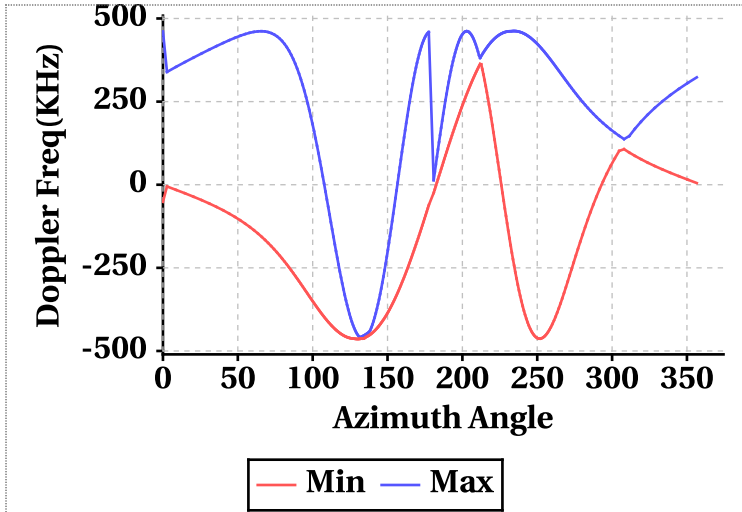


Doppler Frequency(KHz) variation

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	-24.58	13.78	-12.99	-33.00	2.70	-20.06
Doppler_70	-160.60	461.50	460.06	-167.64	517.20	515.37
Doppler_140	15.34	306.04	35.48	11.46	352.80	34.08
Doppler_210	-462.30	-45.38	-460.44	-518.22	-56.68	-516.39
Doppler_280	-51.36	460.96	-38.93	-56.68	517.26	-37.65


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)

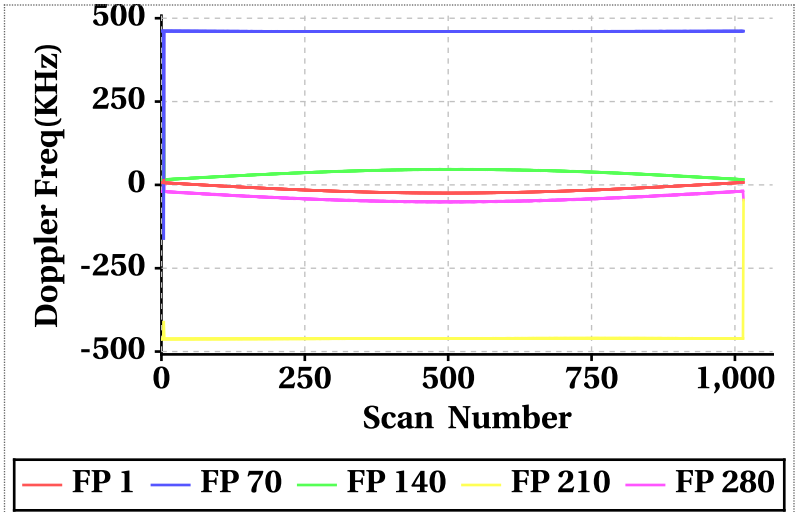

Footprint wise Doppler frequency variation Outer Beam (VV)

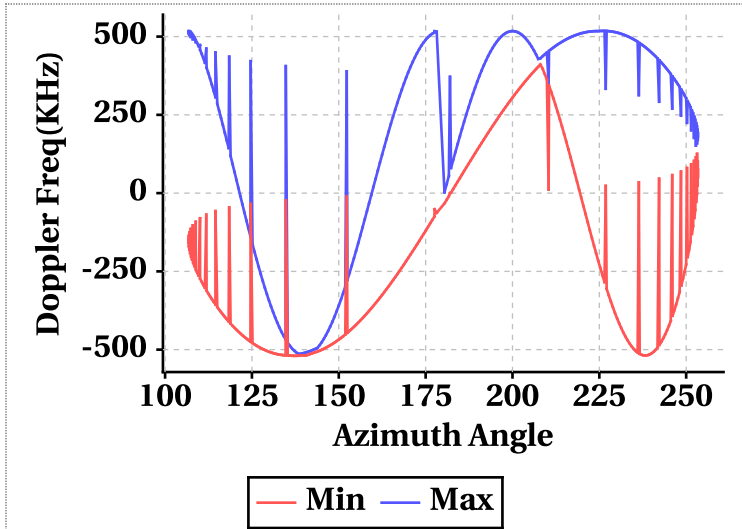


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)

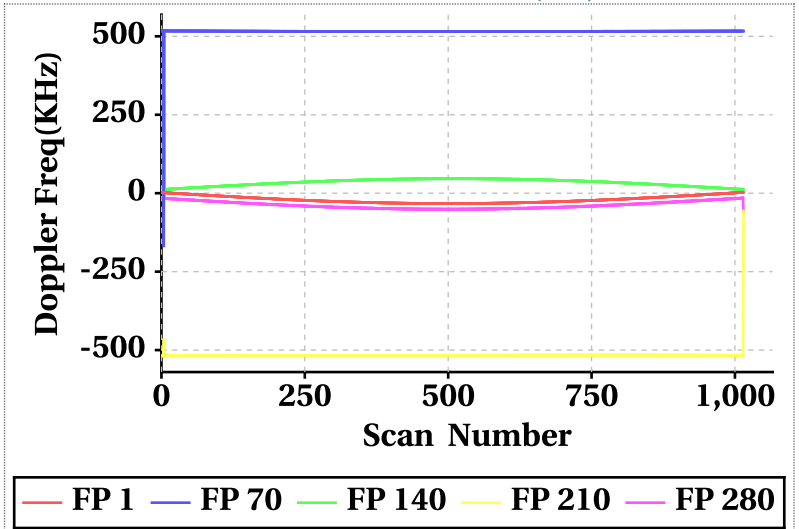


# Latitude Vs Doppler Frequency

Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]

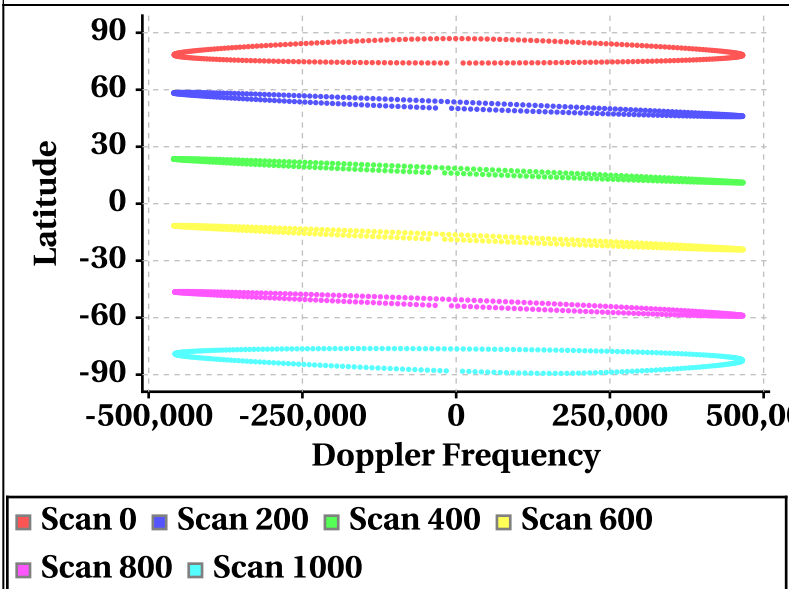


Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]

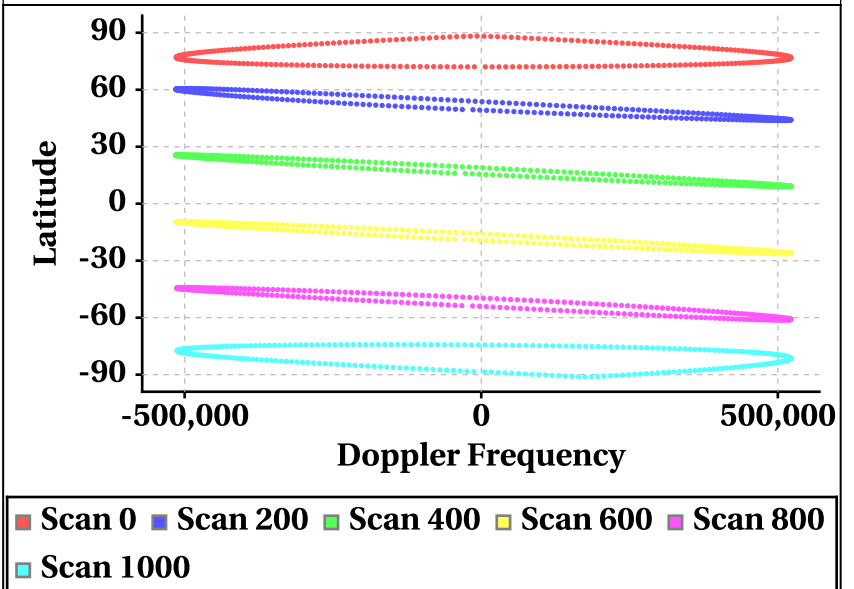

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

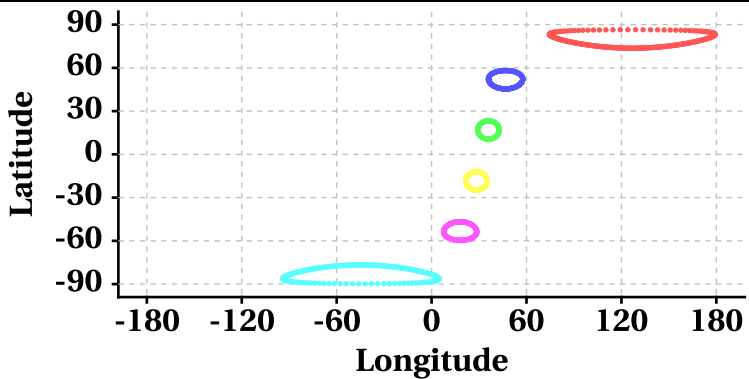

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Scan Trace [Outer Beam (VV)]

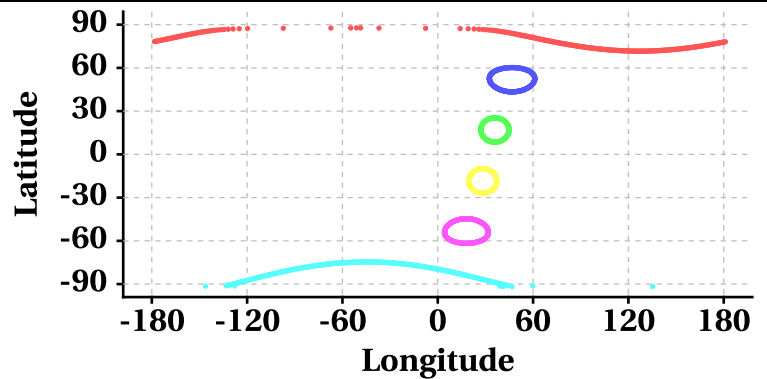

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

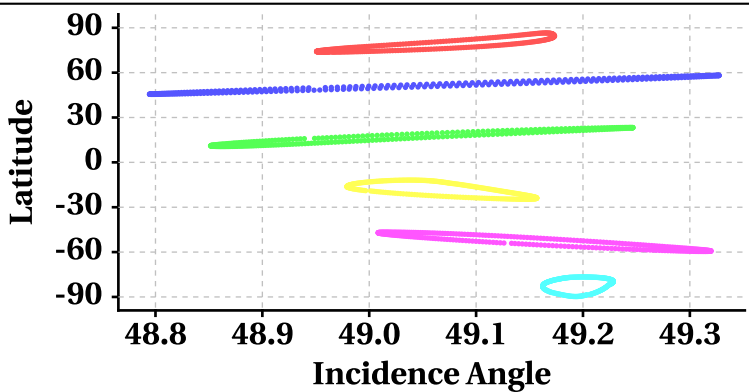

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

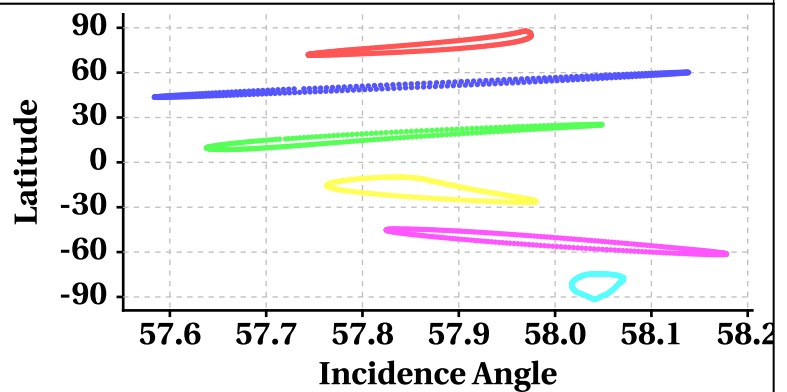

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

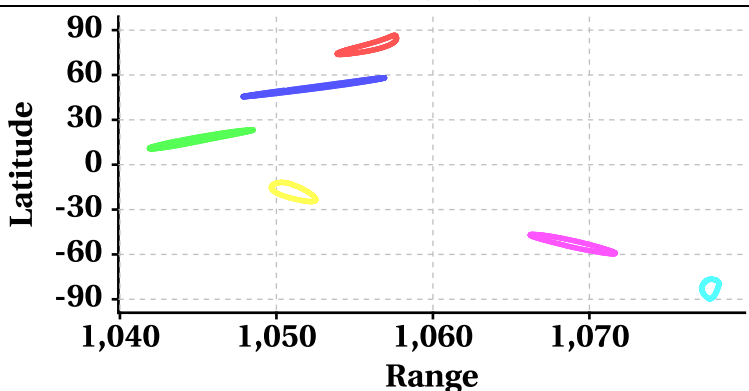

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

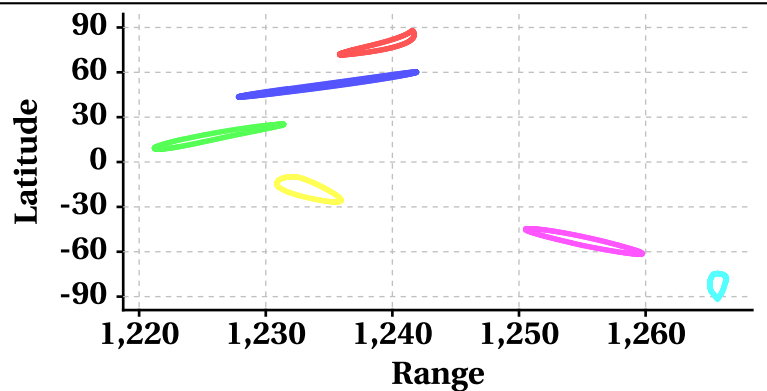

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000



# Variation in Orbit and Attitude Parameters

