

SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

Table of Contents

- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

Satellite Id	ScatSat-1	Start Orbit	2749	Total Scans	1018
Sensor Name	Scatterometer	End Orbit	2750	No of Inner FootPrints	281
Processor Version	1.1.1	Rev. Number	02749_02750	No Of Outer FootPrints	282
Half Orbit Direction	SN	Data Production Date	03-04-2017	No. Of Inner Slices	9
Equator Crossing Date	03-04-2017	Equator Crossing Time	19:28:07.000	No Of Outer Slices	15

Brightness Temperature(k) Footprint trace


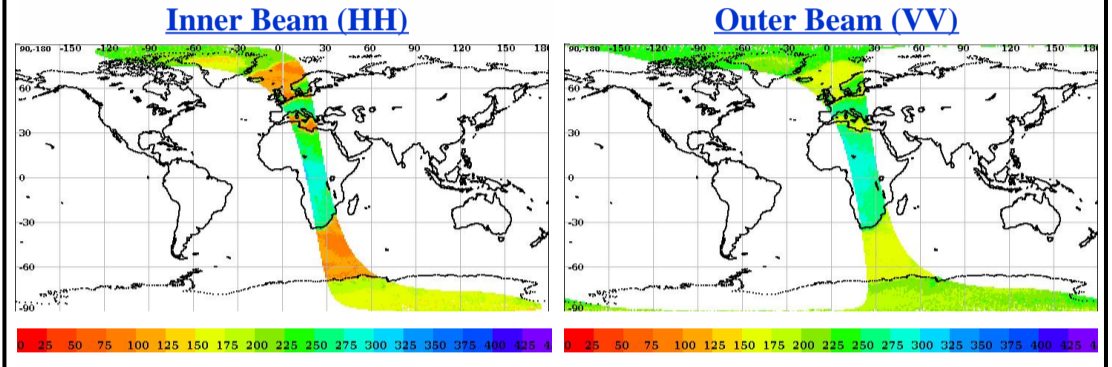



Image Snapshot for Inner & Outer Beam

Inner (HH)

Outer (VV)

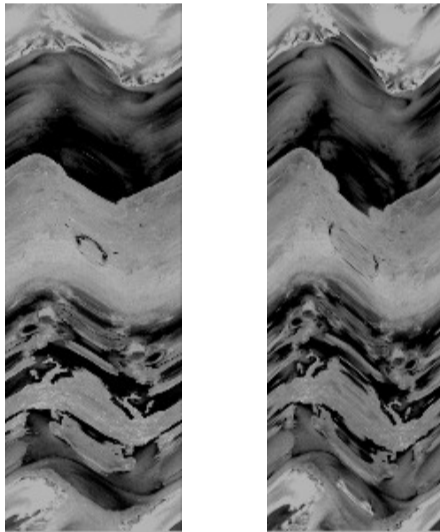

Sigma0(dB) Footprint trace

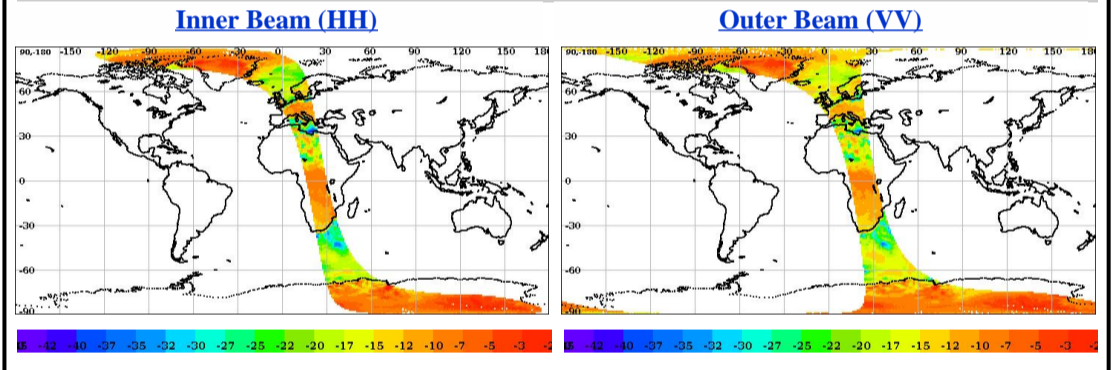


Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.12	0.12
Data Not Available From Payload (%)	100.0	99.30830
Slice not within sample array limits (%)	0.00	0.69
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	0.00	0.00
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	100.0	100.0


*DP Format Document

Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

Inner Beam (HH)

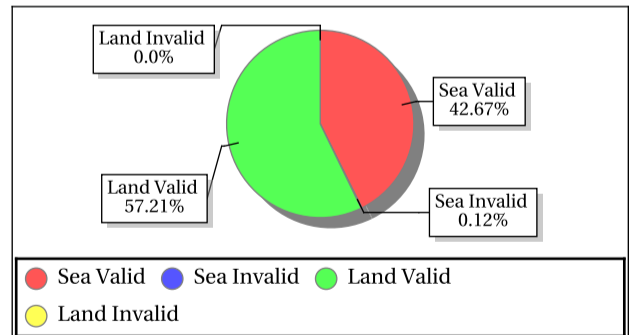

Outer Beam (VV)

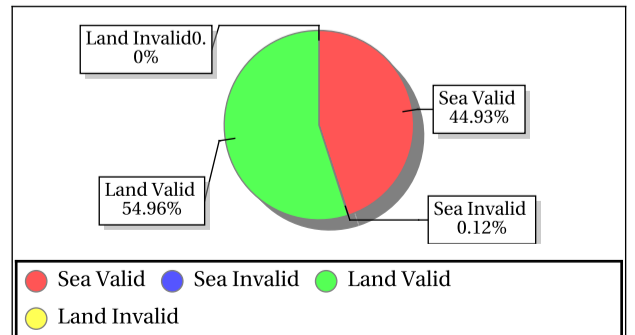

Invariant Site Sigma-0 Statistics for Ascending/Descending, Fore/Aft in HH/VV beams

Site Name	Center Lat	Center Lon	Beam	Node	ScanDir	Sigma0 Min	Sigma0 Max	Sigma0 Mean	Sigma0 Std	BT Min	BT Max	BT Mean	BT Std
ANT_1	-75.00	121.00	Inner	DSC	Aft	-6.88	-5.37	-6.07	0.43	161.84	189.52	174.25	9.15
GreenLand_2	77.50	-41.50	Inner	DSC	Aft	-5.67	-4.31	-4.81	0.50	154.00	176.94	163.94	8.14
GreenLand_2	77.50	-41.50	Inner	DSC	Fore	-5.15	-4.14	-4.76	0.37	135.21	155.55	148.45	8.03
GreenLand_1	74.69	-42.50	Inner	DSC	Aft	-10.54	-7.60	-8.67	0.61	152.37	220.19	180.81	14.14
GreenLand_1	74.69	-42.50	Inner	DSC	Fore	-9.72	-7.06	-8.33	0.80	149.61	199.01	167.94	13.82
Sahara	19.10	14.30	Inner	DSC	Aft	-33.13	-20.11	-26.52	3.35	205.79	282.68	248.69	15.30
Sahara	19.10	14.30	Inner	DSC	Fore	-31.85	-19.55	-26.09	3.07	210.22	285.15	252.59	15.61
ANT_1	-75.00	121.00	Outer	DSC	Aft	-8.92	-7.07	-7.96	0.57	168.20	229.74	195.82	17.64
GreenLand_2	77.50	-41.50	Outer	DSC	Fore	-4.94	-3.53	-4.38	0.55	194.99	222.68	210.47	11.25
GreenLand_3	71.55	-42.45	Outer	DSC	Aft	-12.08	-9.79	-10.96	0.57	194.19	244.75	229.00	12.84
GreenLand_3	71.55	-42.45	Outer	DSC	Fore	-12.57	-10.17	-11.09	0.53	180.69	247.67	219.00	15.20
GreenLand_1	74.69	-42.50	Outer	DSC	Aft	-9.77	-8.17	-8.86	0.47	191.47	250.53	220.58	20.35
GreenLand_1	74.69	-42.50	Outer	DSC	Fore	-9.51	-6.80	-8.18	0.82	216.17	241.64	228.28	7.89
Sahara	19.10	14.30	Outer	DSC	Aft	-33.92	-18.90	-26.08	3.49	234.05	316.65	280.29	16.60
Sahara	19.10	14.30	Outer	DSC	Fore	-34.40	-19.80	-26.35	3.38	254.08	305.56	278.63	12.70



Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
Kp	0.10	171.53	0.17	0.688	0.10	104.81	0.15	0.469	0.10	3.62	0.11	0.002	0.10	1.63	0.11	0.003
Kpa	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
Kpb	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000
Kpc	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
SNR	-33.08	26.68	8.06	0.102	-30.94	27.05	9.61	0.606	-16.22	30.94	17.98	13.232	-12.63	29.97	18.12	12.241

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
Kp	0.08	158.38	0.15	0.794	0.08	114.54	0.13	0.637	0.08	23.14	0.09	0.016	0.08	34.61	0.09	0.016
Kpa	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
Kpb	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
Kpc	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000
SNR	-33.75	20.88	5.39	0.000	-32.34	21.28	6.69	0.000	-25.38	23.39	12.39	0.139	-27.13	23.88	12.32	0.283

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

Overall statistics for static parameter (Footprint-wise)

	Inner Beam (VV)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
Incidence Angle (deg)	48.69	49.35	49.04	0.000	57.57	58.30	57.99	0.000	Inci.(Inner)	47.10	49.90
Azimuth Diff. (deg)	0.0027	1.81	1.08	0.138	0.0026	1.97	1.08	0.206	Inci.(Outer)	57.30	58.90
Range(Km)	1027.76	1087.18	1049.13	0.000	1206.39	1279.87	1234.40	9.516	Azimuth Diff.	0.60	2.00
X Factor(dbm)	-91.47	-89.97	-90.20	0.000	-93.02	-91.99	-92.21	0.000	Range(Inner)	1025.00	1095.70
Across Distance (Km)	99999.99	-99999.99	0.00	0.000	99999.99	-99999.99	0.00	0.000	Range(Outer)	1210.00	1280.00
Along Distance (Km)	18.68	20.51	19.75	0.000	18.45	20.51	19.65	0.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

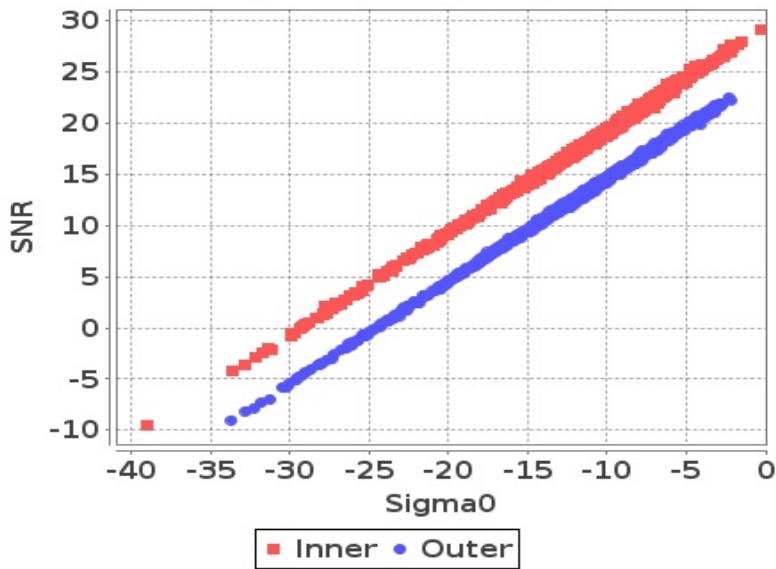


Footprint-Sea

Sigma0 Vs SNR (Sea)

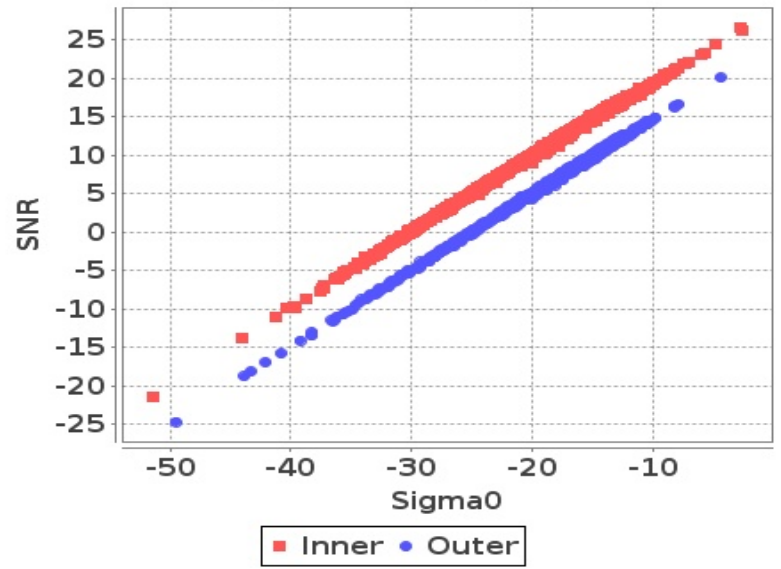


Slice-Land

Sigma0 Vs SNRatSlice (Land)

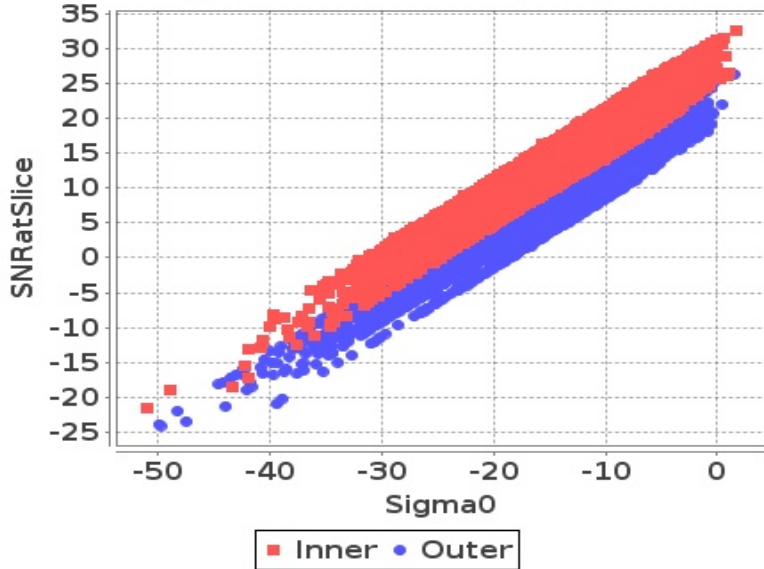

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

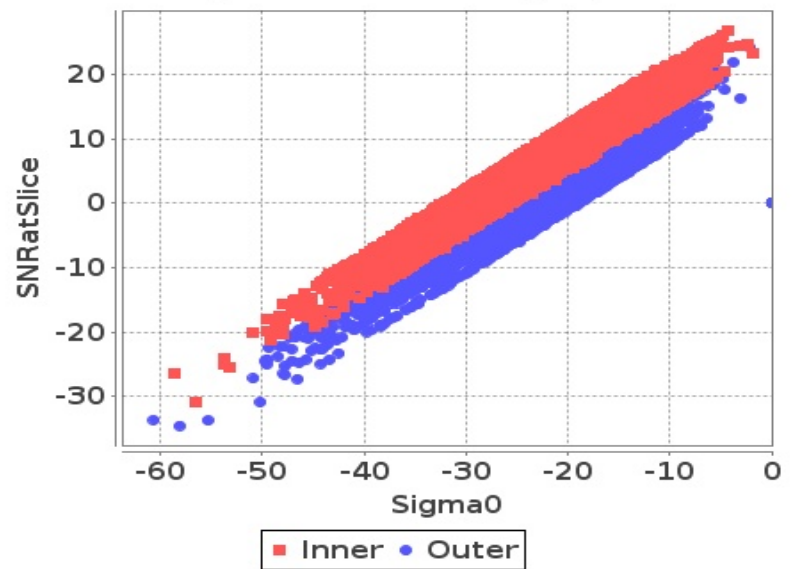

Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

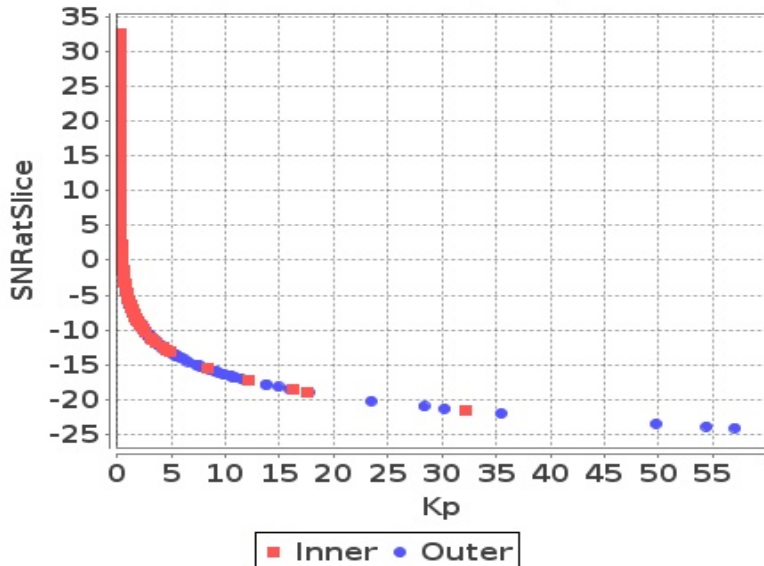

Slice


Kp Vs SNRatSlice (Sea)

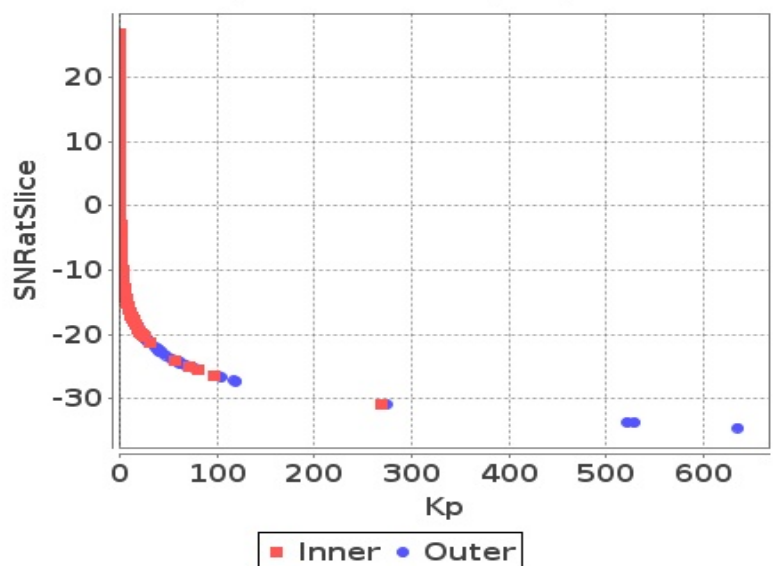

Sigma0 Behaviour(Sigma0 Vs Kp)


Footprint-Land

Sigma0 Vs Kp (Land)

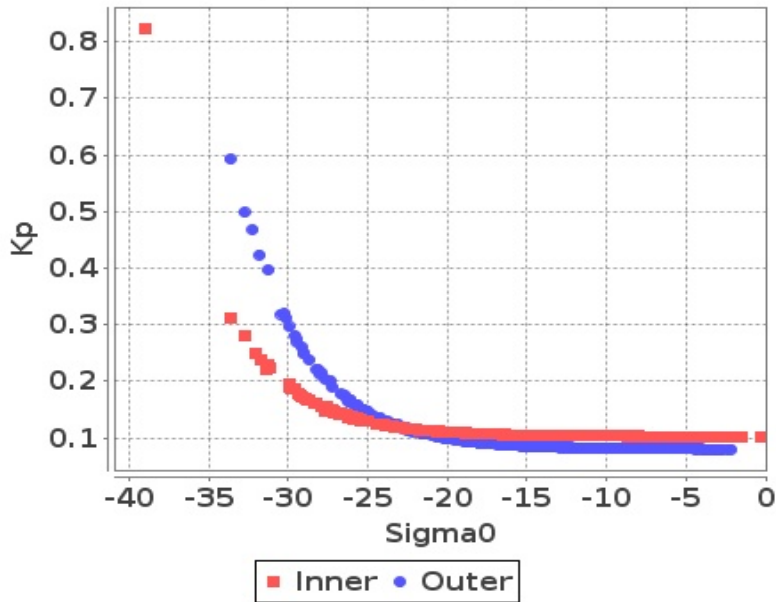


Footprint-Sea

Sigma0 Vs Kp (Sea)

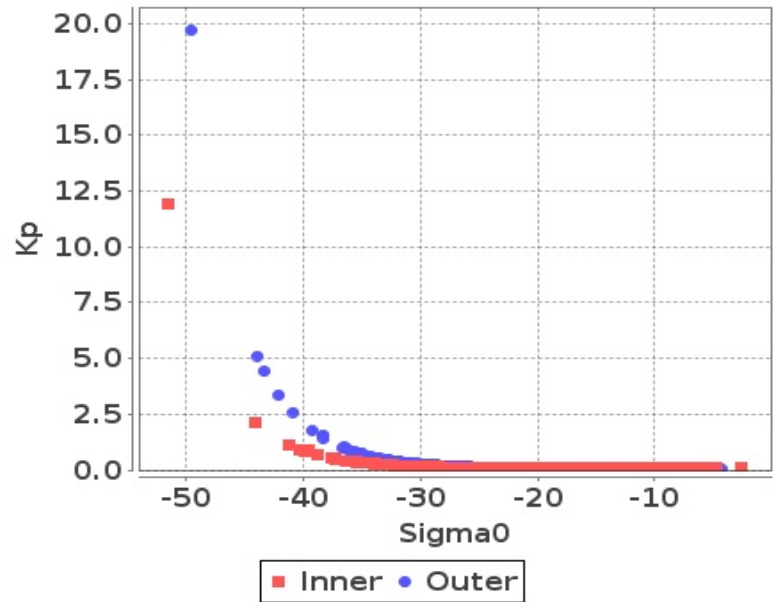


Slice-Land

Sigma0 Vs KpatSlice (Land)

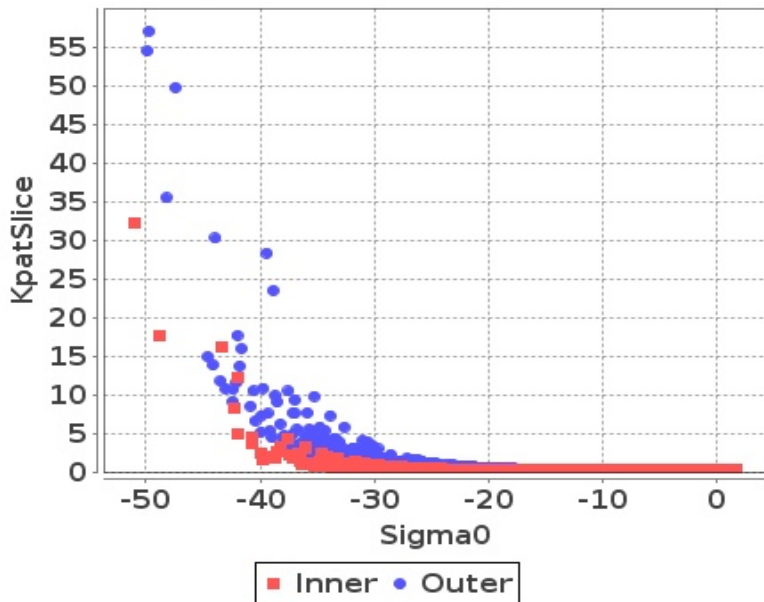

Slice-Sea

Sigma0 Vs KpatSlice (Sea)




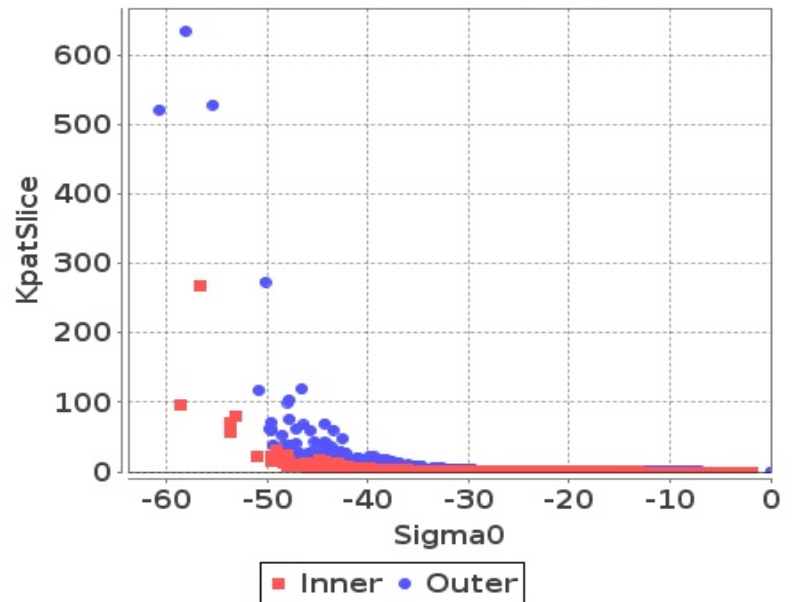


Dynamic Range (Data Histograms)

Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-45	-42	-63	-61
Max	2	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-49	-51	-58	-57
Max	0	0	0	0

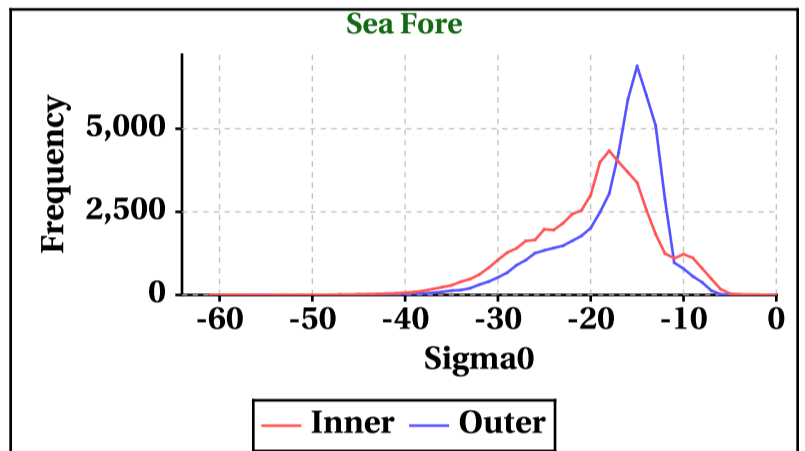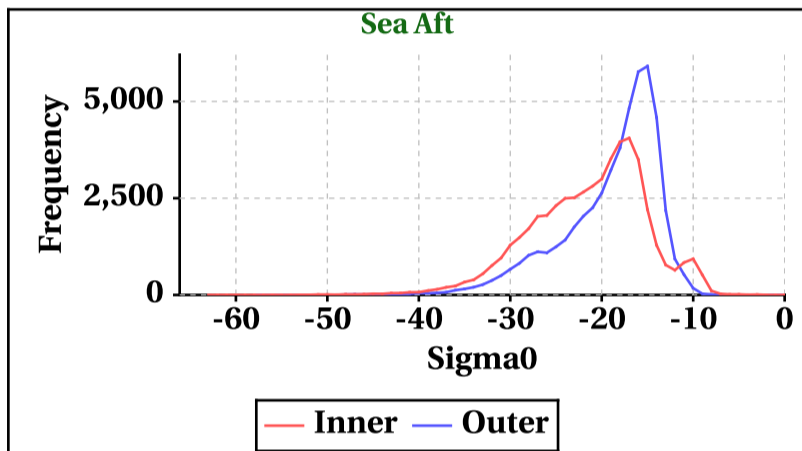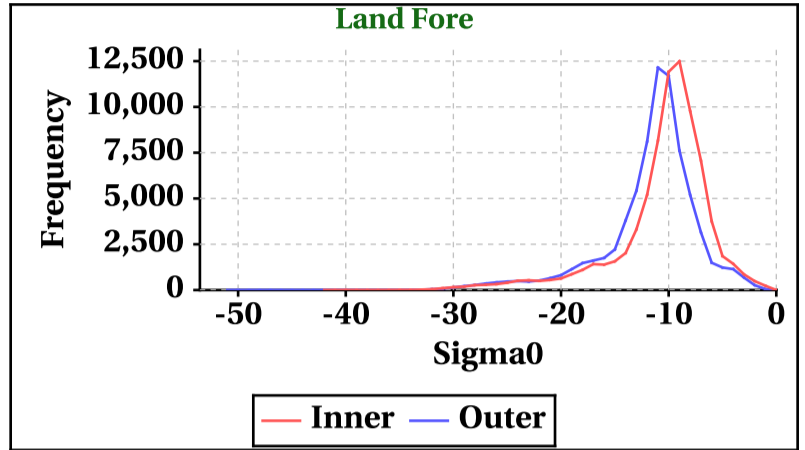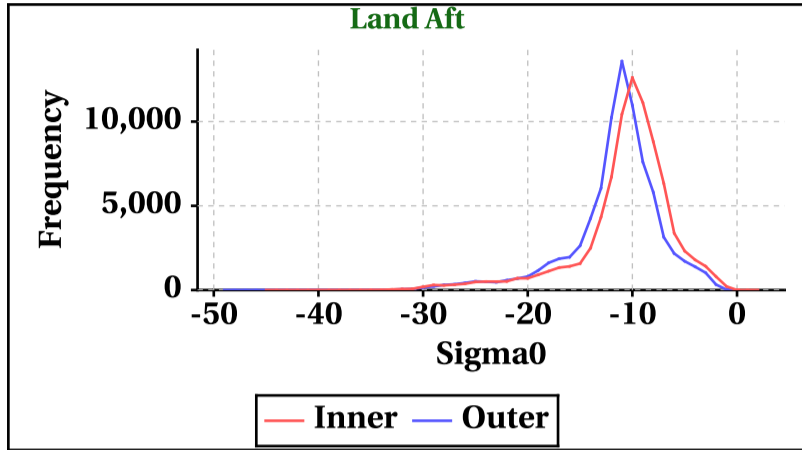

Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	375	359	276	290

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	389	393	295	301

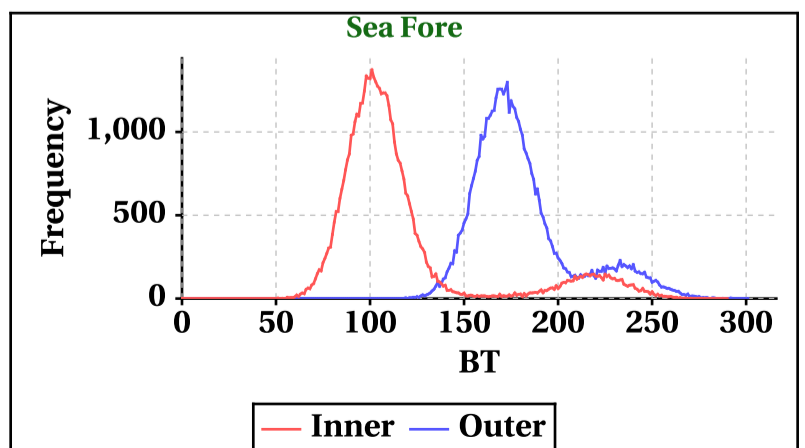
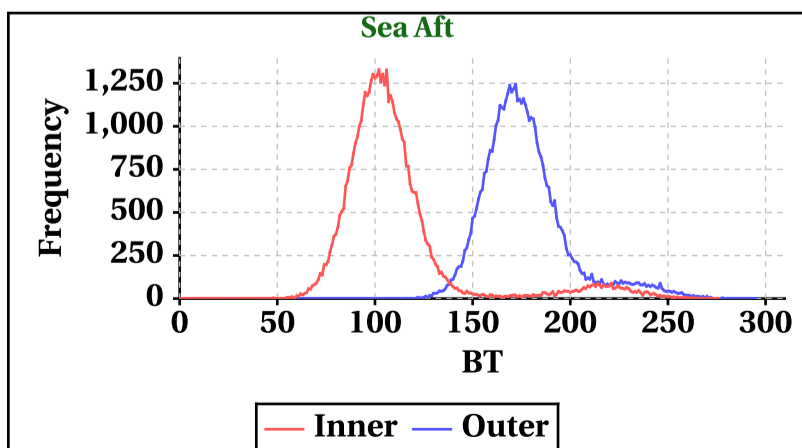
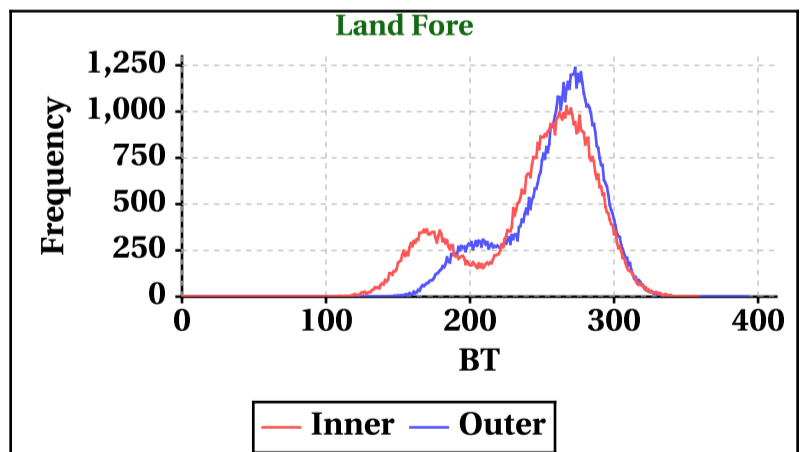
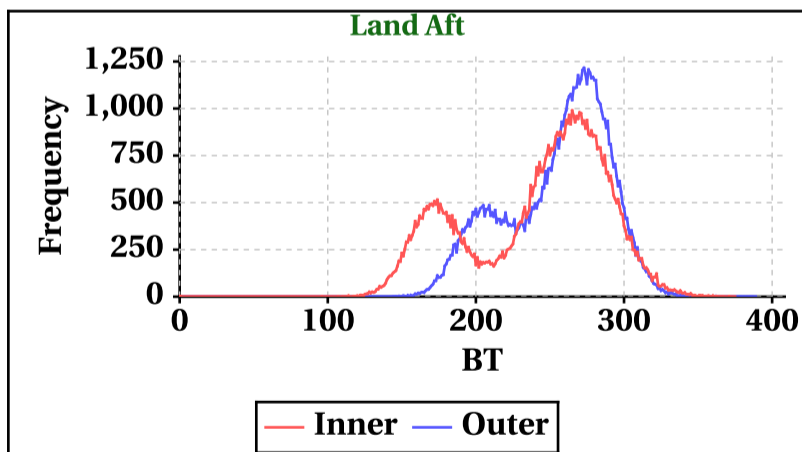


Dynamic Range (Data Histograms)

SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-16	-12	-33	-30
Max	30	29	26	27

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-25	-27	-33	-32
Max	23	23	20	21

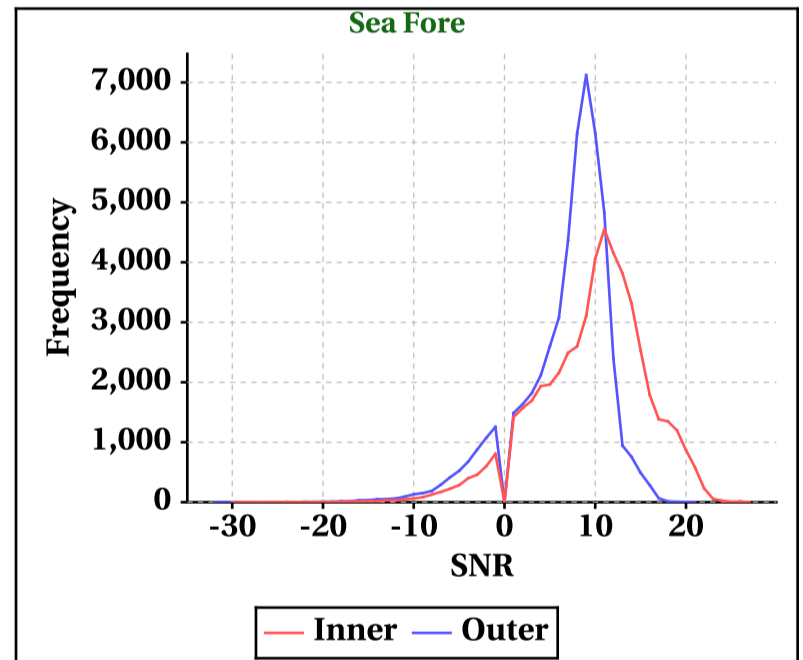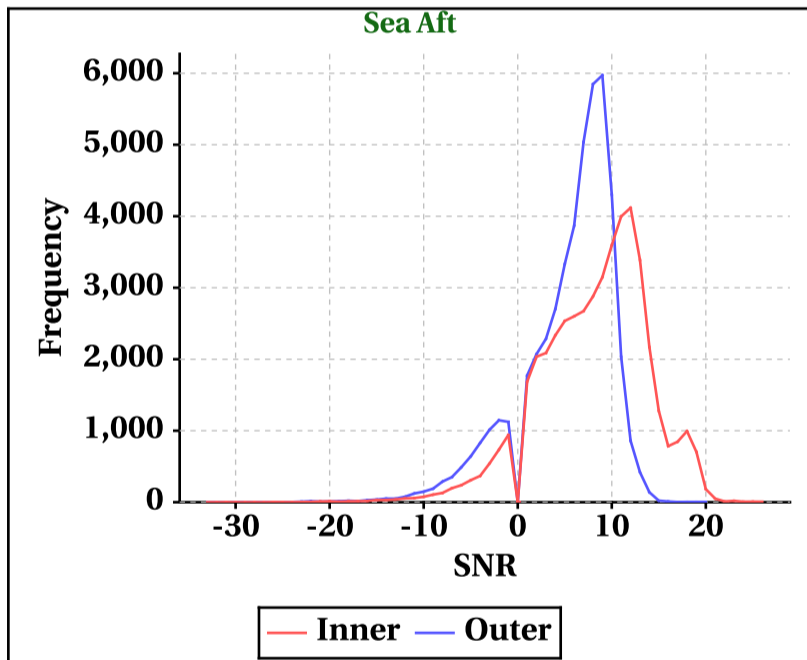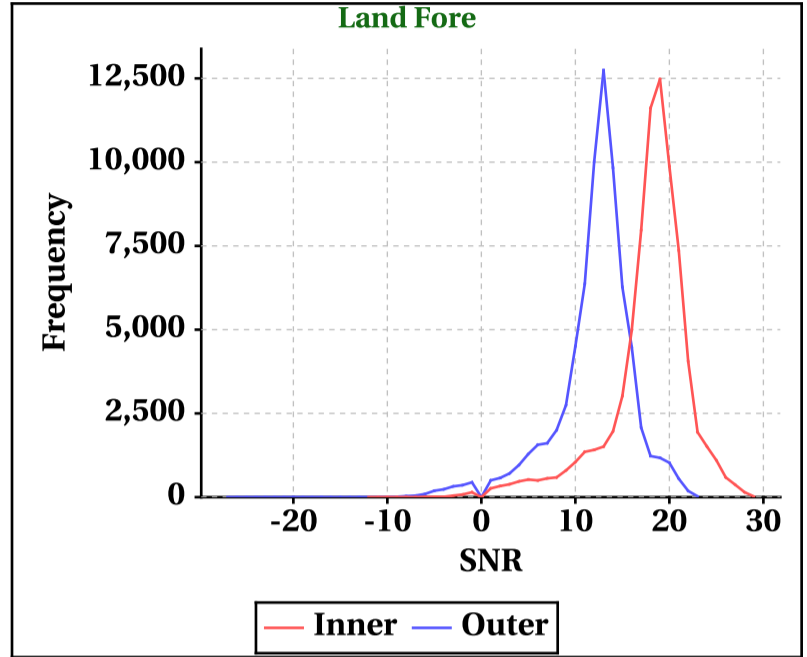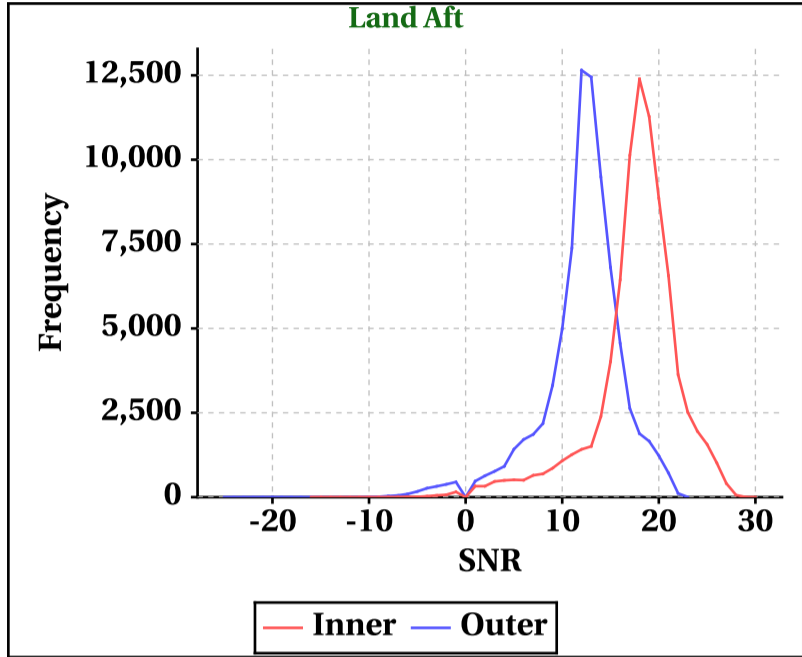


Orbit-wise behaviour of SNR

Inner Beam (HH)

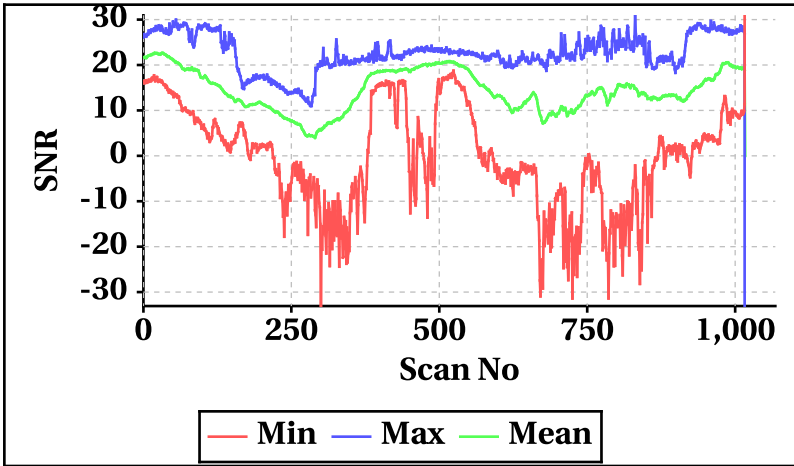


Outer Beam(VV)

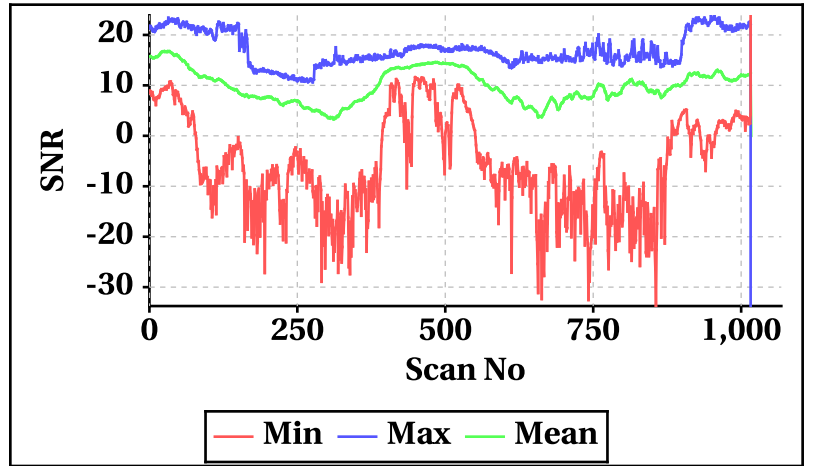


Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

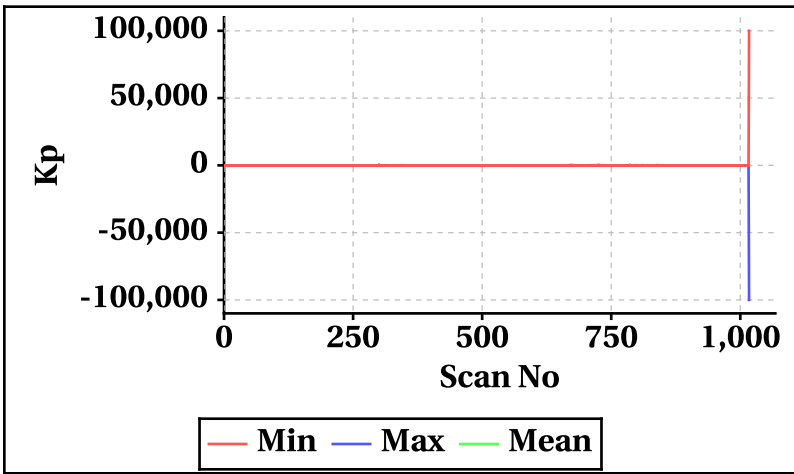


Outer Beam(VV)

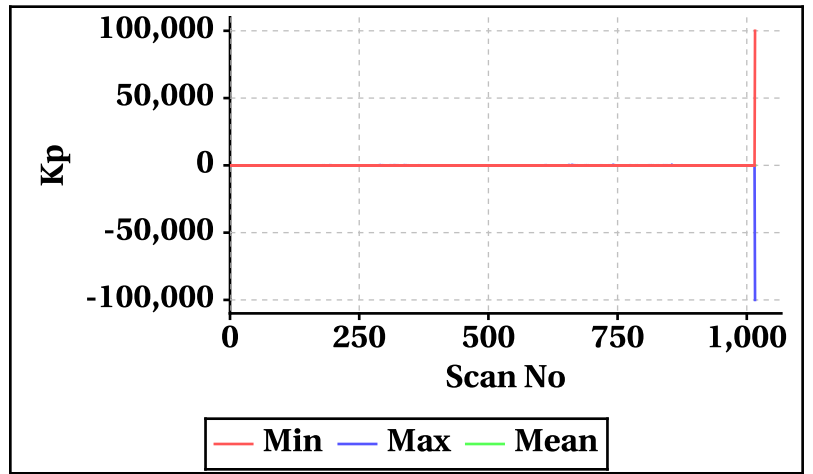


Inner Beam(HH)

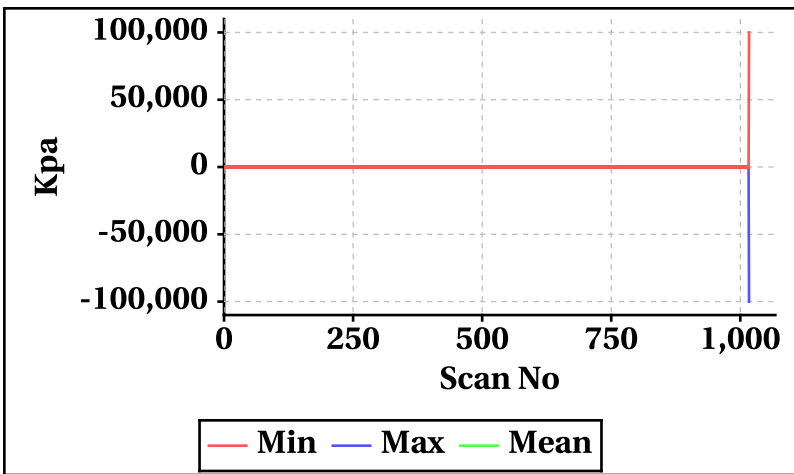


Outer Beam(VV)

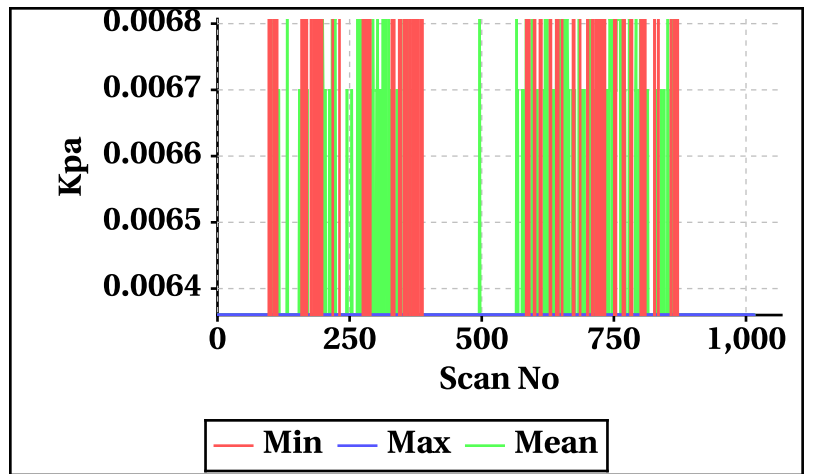


Inner Beam(HH)

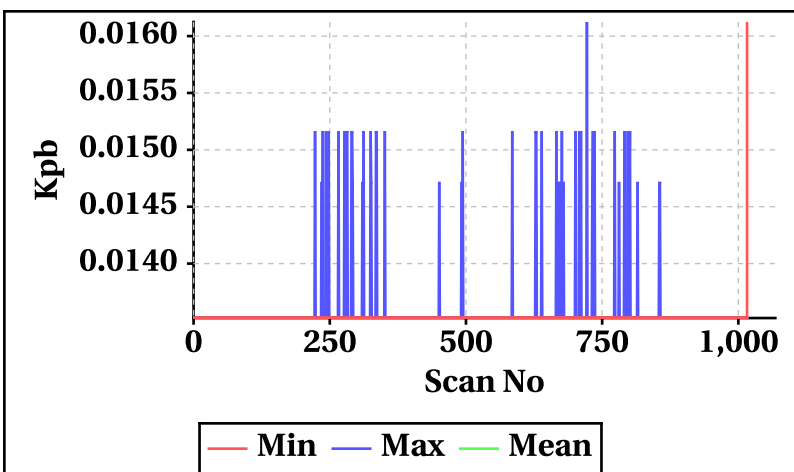


Outer Beam(VV)

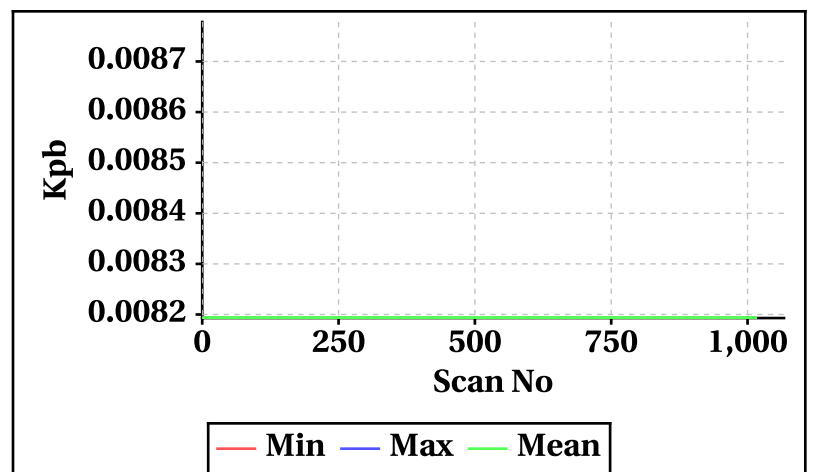

Inner Beam(HH)

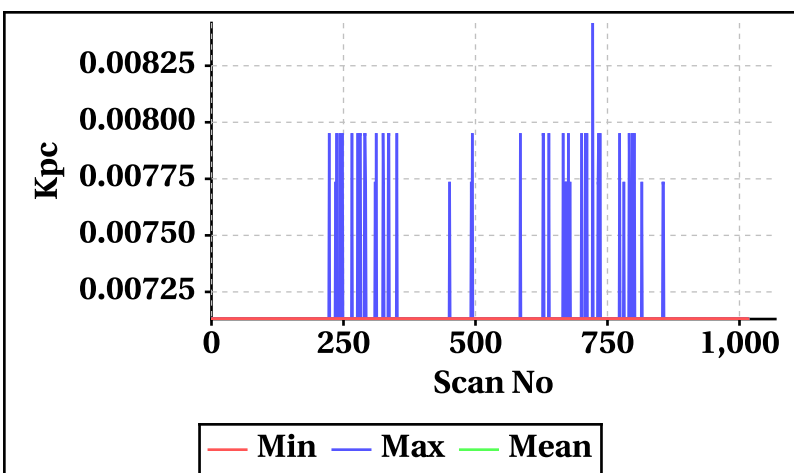


Outer Beam(VV)

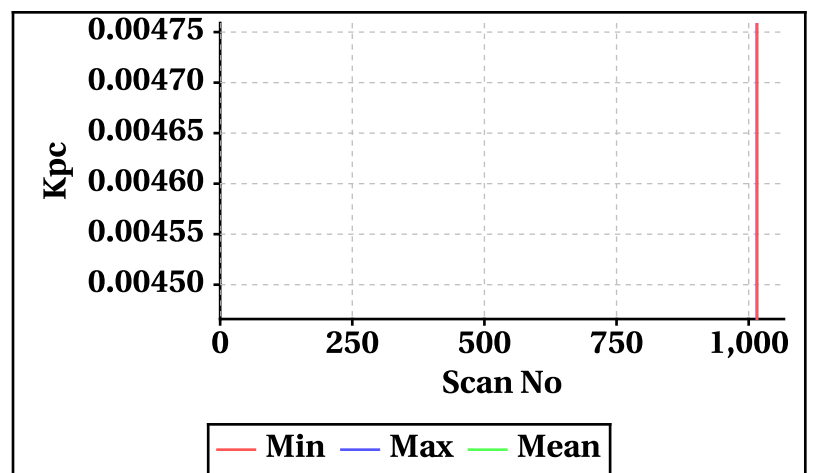


Orbt-wise behaviour of Incidence,Azimuth,Range,X-Factor


Inner Beam (HH)

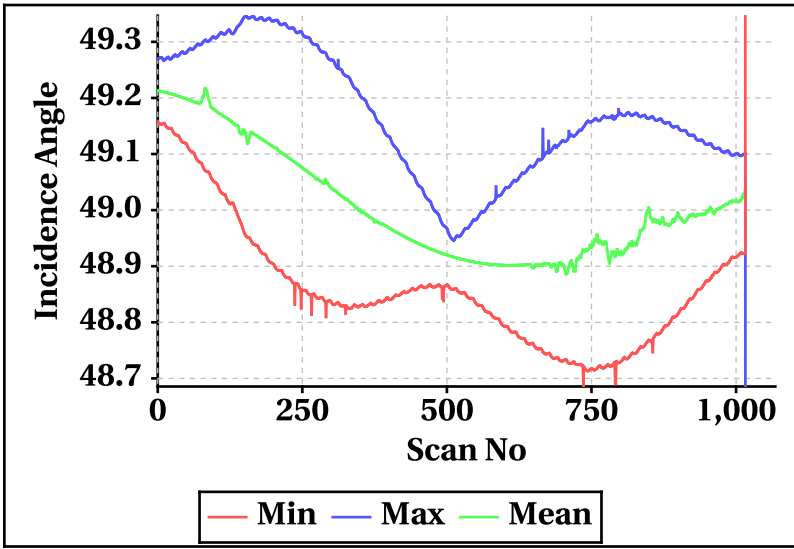


Outer Beam(VV)

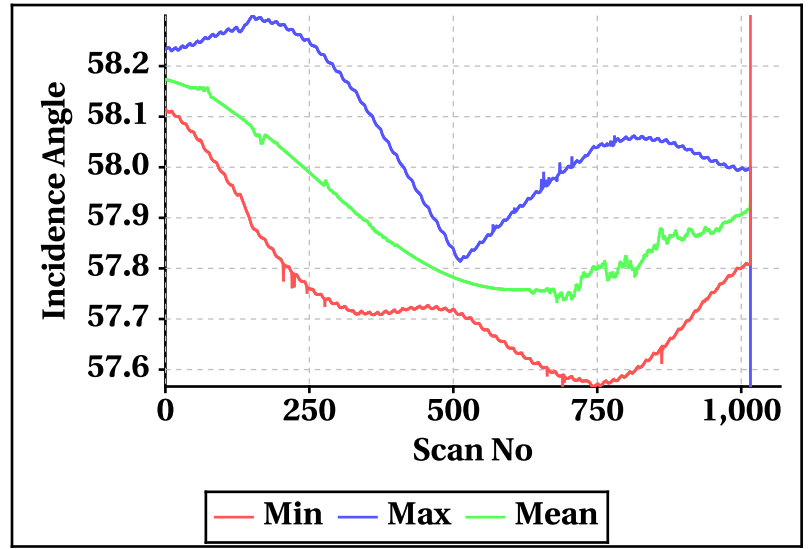


Inner Beam (HH)

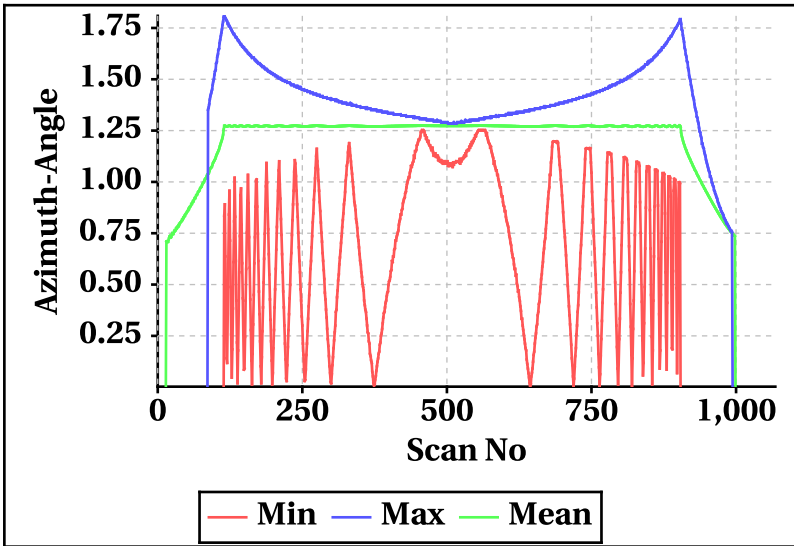


Outer Beam(VV)

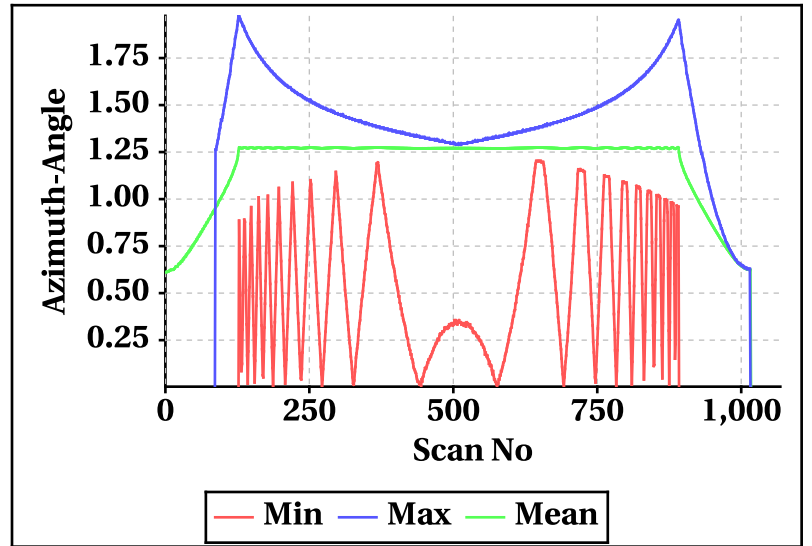


Inner Beam (HH)

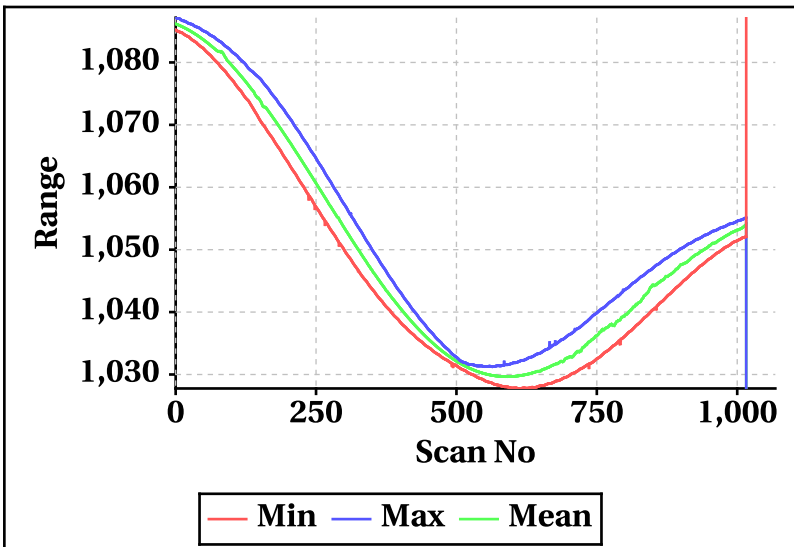


Outer Beam(VV)

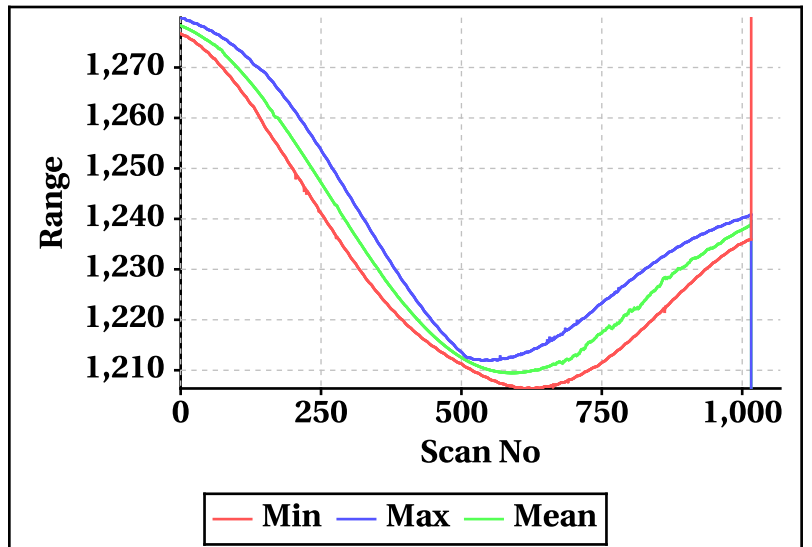

Inner Beam (HH)

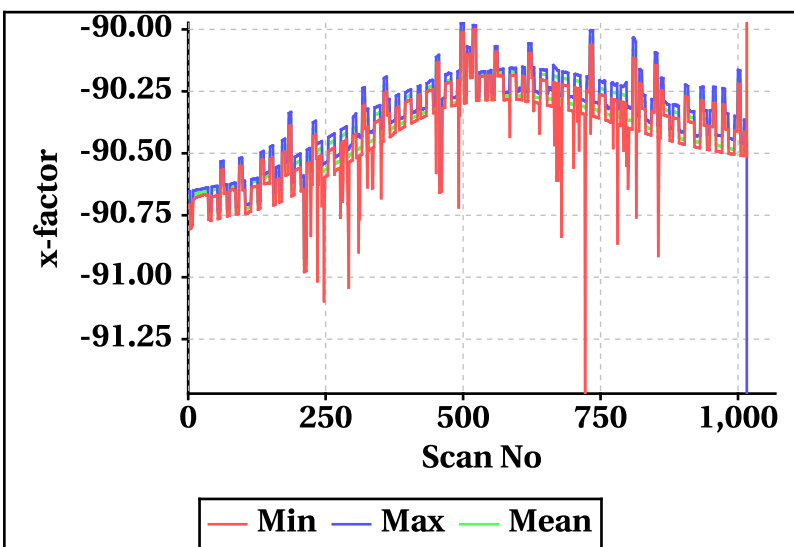

Outer Beam(VV)

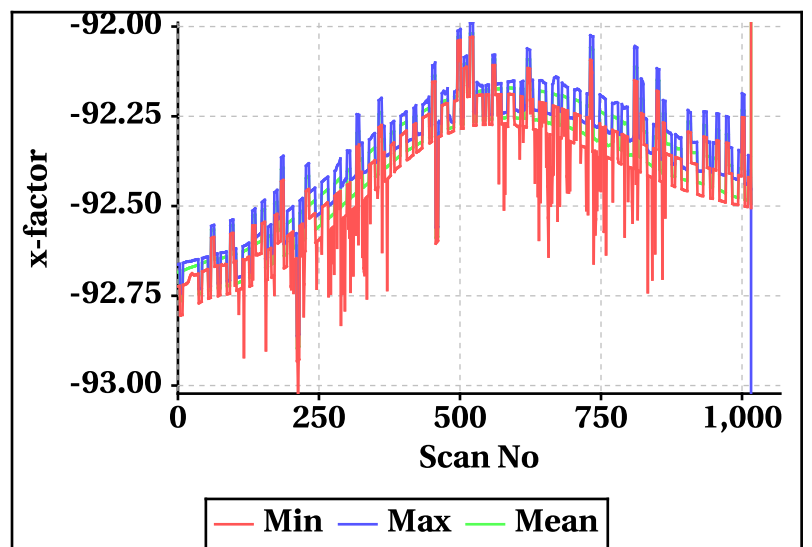


Doppler Frequency Variation


Doppler Frequency(KHz) variation statistics Over the half Orbit

	Inner Beam (HH)	Outer Beam (VV)
Min	-470.10	-527.02
Max	471.66	528.42

Footprint wise Doppler frequency variation Inner Beam (HH)

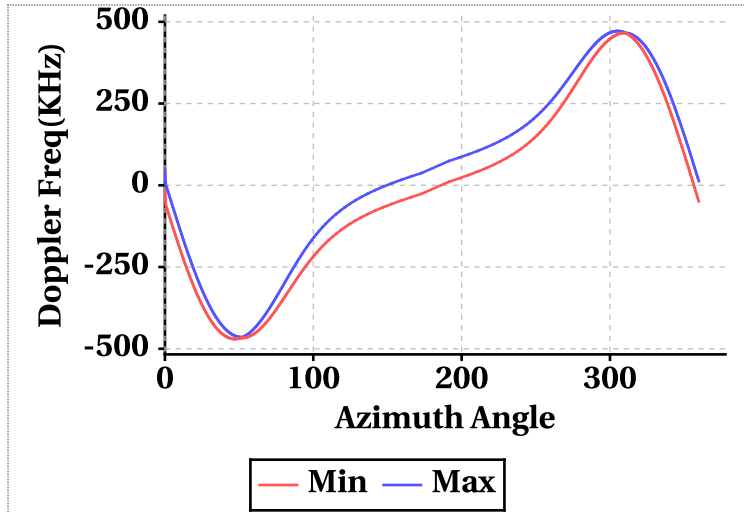


Footprint wise Doppler frequency variation Outer Beam (VV)

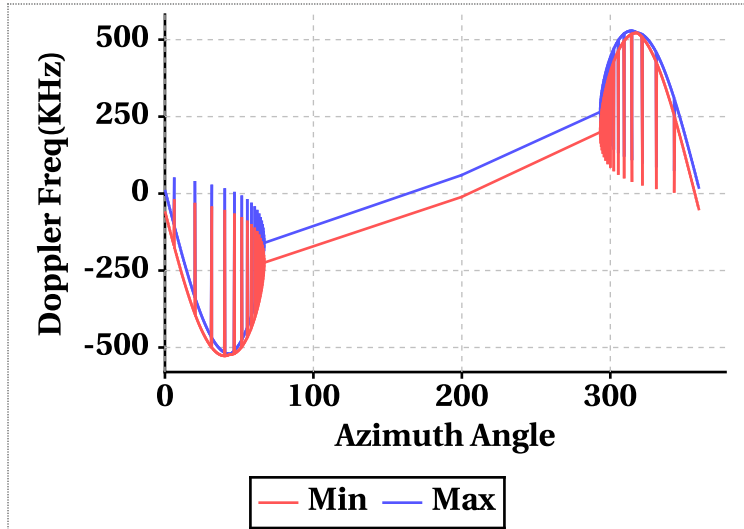


Doppler Frequency(KHz) variation

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	-433.44	74.42	50.96	-487.52	78.10	51.88
Doppler_70	-433.44	468.32	466.39	-487.52	525.26	522.91
Doppler_140	-433.44	13.00	-27.10	-487.52	7.96	-36.98
Doppler_210	-468.20	-433.44	-467.04	-524.26	-487.52	-523.20
Doppler_280	-433.44	47.80	23.89	-487.52	59.88	33.14

Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)

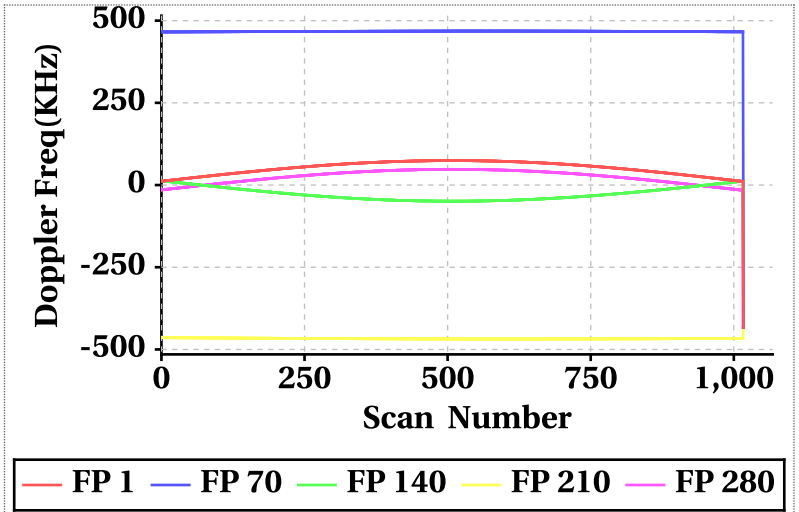


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)

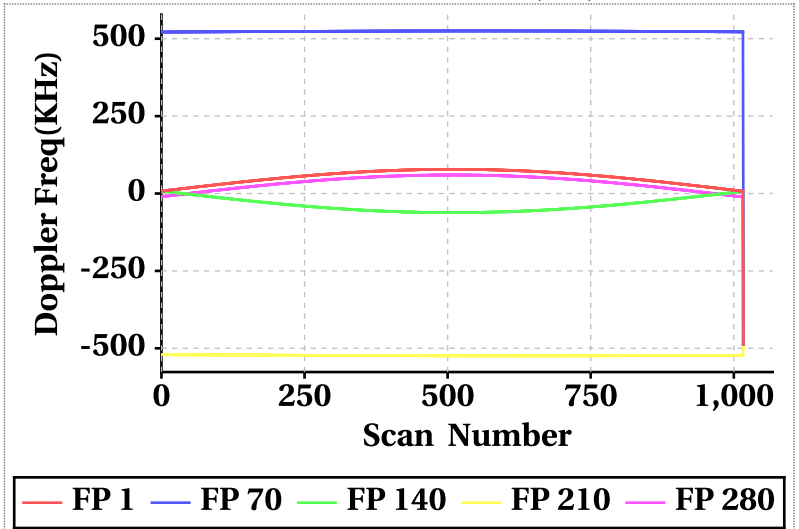


Latitude Vs Doppler Frequency

Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]

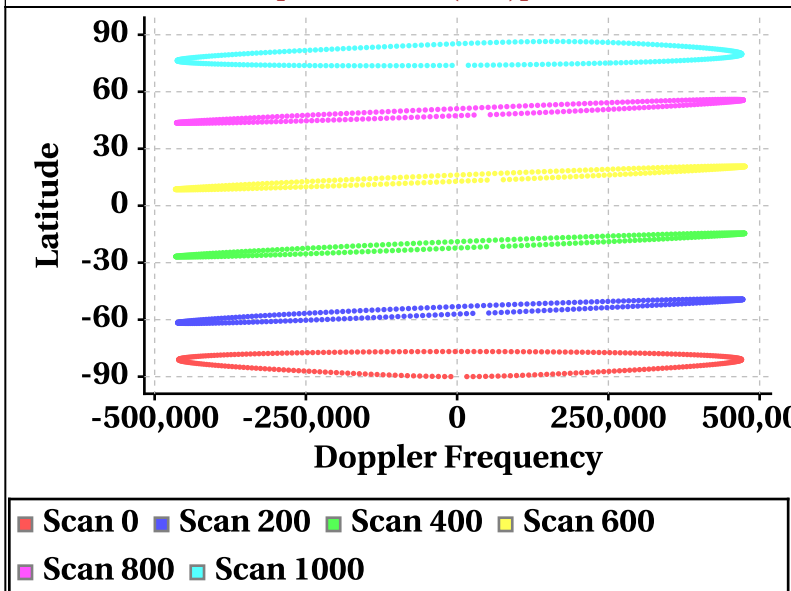


Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]

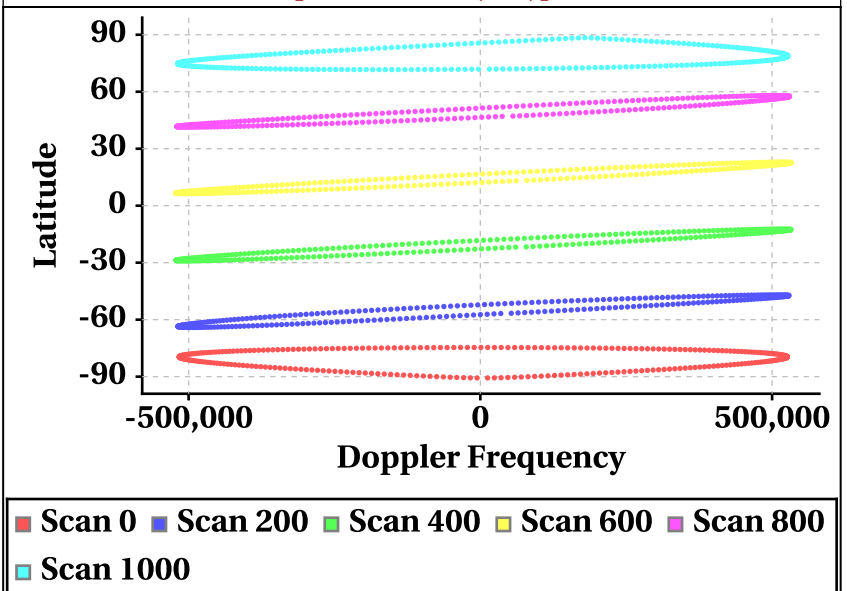


Parameter as a function of Latitude

Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

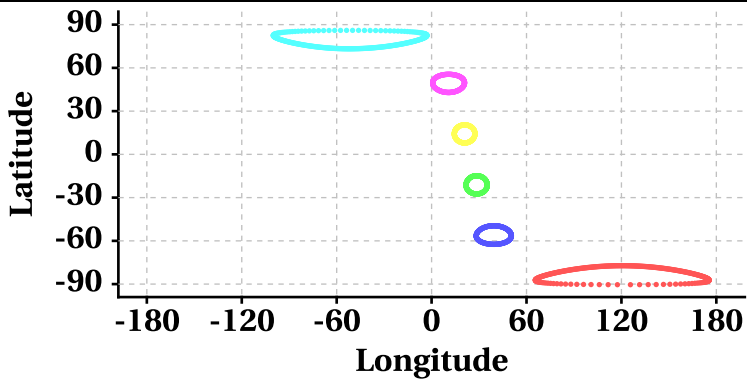


Scan Trace [Outer Beam (VV)]

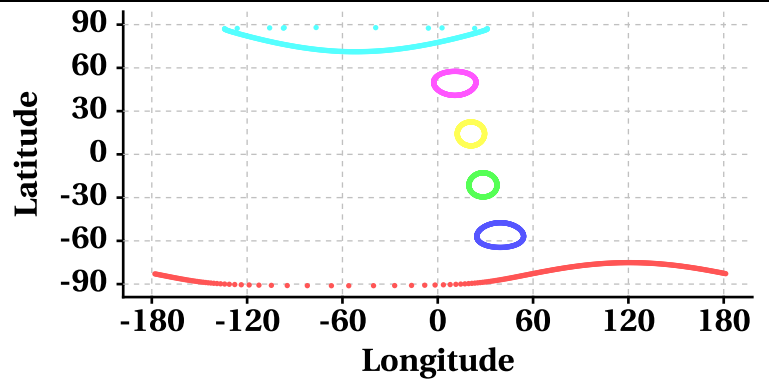


Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

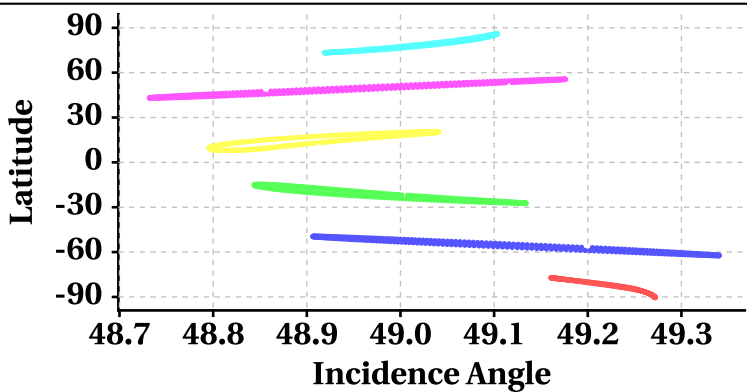


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

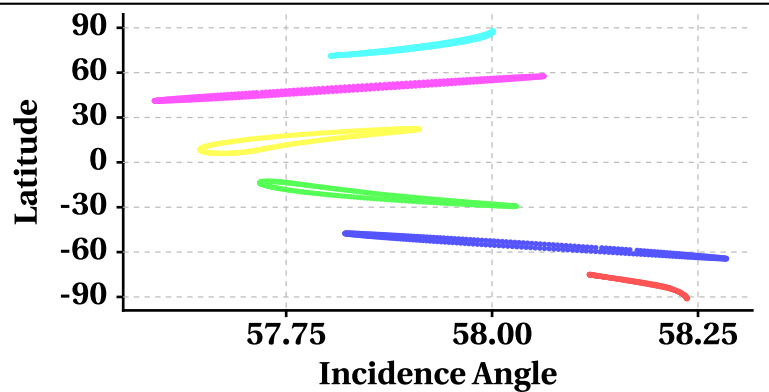


Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

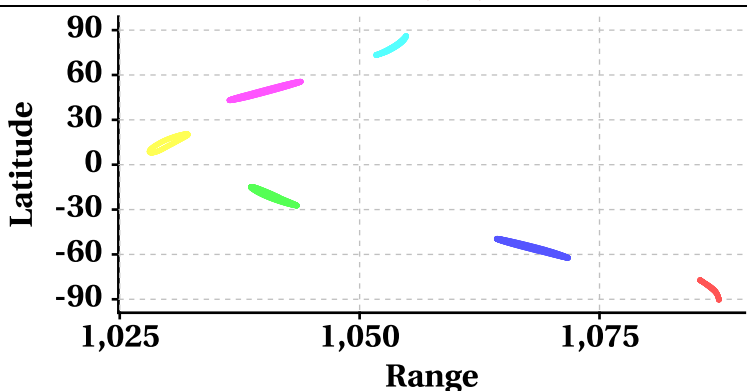

Range at Scan Interval of 200 [Outer Beam(VV)]

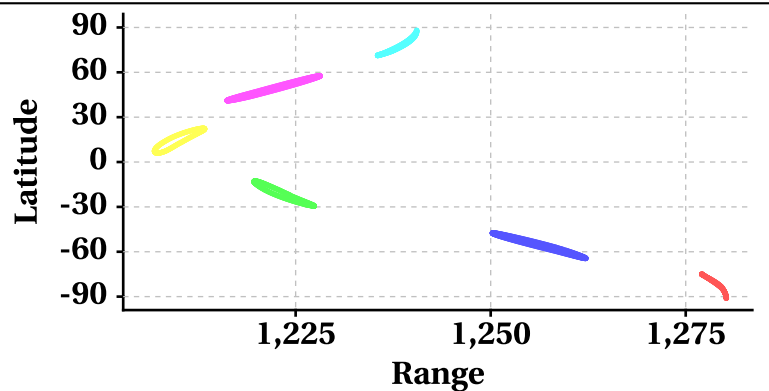

Variation in Orbit and Attitude Parameters

