


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents

- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	14499	<b>Total Scans</b>	1017
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	14500	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	v1.1.3	<b>Rev. Number</b>	14499_14500	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	SN	<b>Data Production Date</b>	23-06-2019	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	23-06-2019	<b>Equator Crossing Time</b>	04:50:26.000	<b>No Of Outer Slices</b>	15



## Brightness Temperature(k) Footprint trace

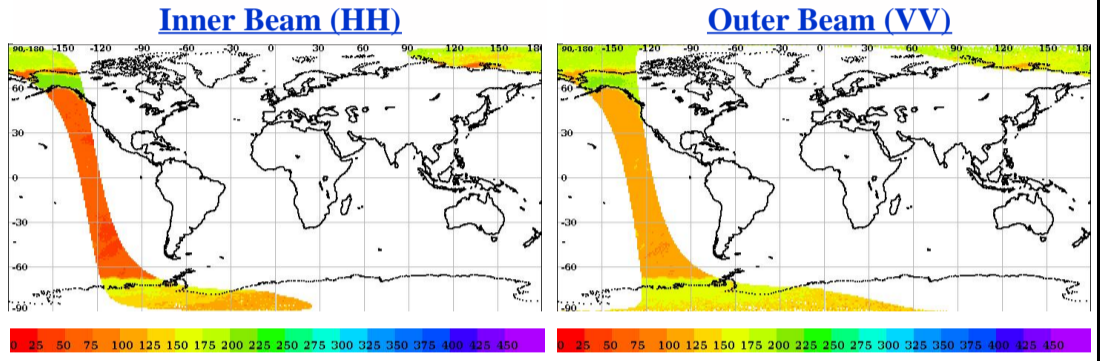


## Image Snapshot for Inner & Outer Beam

Inner (HH)

Outer (VV)



## Sigma0(dB) Footprint trace

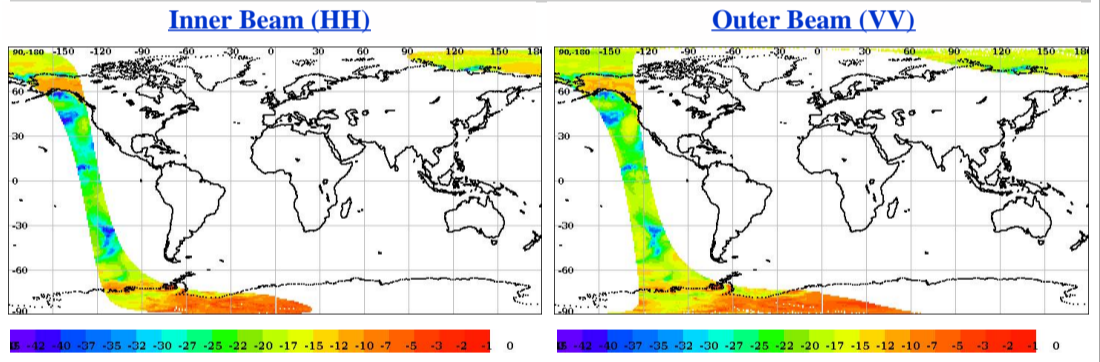


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.08	0.08
Data Not Available From Payload (%)	100.0	100.0
Slice not within sample array limits (%)	0.00	0.00
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	22.21	13.33
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0<lower bound (-96dB) (%)	0.0	0.0
Sigma0>upper bound (0 dB) (%)	0.00	0.00
SNR <-65 dB (%)	0.035186	0.074109


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

Inner Beam (HH)

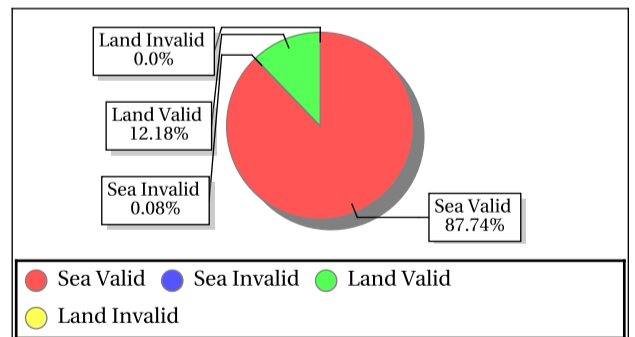

Outer Beam (VV)

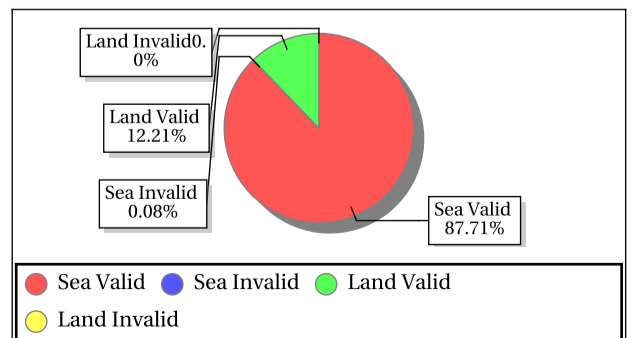

## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.12	286.28	0.28	2.147	0.12	241.06	0.24	1.548	0.12	0.13	0.12	0.000	0.12	0.13	0.12	0.000
<b>Kpa</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.70	23.77	5.91	0.029	-33.96	23.87	6.93	0.072	6.35	27.42	17.63	13.371	7.54	28.27	17.24	6.482

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.09	177.67	0.24	1.973	0.09	225.57	0.23	1.648	0.09	0.13	0.09	0.000	0.09	0.13	0.09	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-33.80	17.06	3.95	0.000	-34.84	17.57	4.19	0.000	1.26	22.39	12.40	0.005	1.57	21.83	11.48	0.000

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)


	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.78	49.39	49.04	0.000	57.57	58.23	57.94	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0026	279.89	1.27	2.505	0.0000	297.89	1.27	3.685	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1032.54	1076.83	1051.32	0.000	1210.30	1264.90	1233.56	0.000	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.69	-90.05	-90.55	0.000	-93.17	-92.09	-92.27	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	15.72	16.02	15.62	0.000	20.64	21.06	20.53	0.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.82	39.59	19.74	1.000	18.55	39.60	19.65	1.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00
									<span style="display: inline-block; width: 15px; height: 15px; background-color: green; margin-right: 5px;"></span> Normal	<span style="display: inline-block; width: 15px; height: 15px; background-color: orange; margin-right: 5px;"></span> Alarming	
									<span style="display: inline-block; width: 15px; height: 15px; background-color: yellow; margin-right: 5px;"></span> Deviations	<span style="display: inline-block; width: 15px; height: 15px; background-color: red; margin-right: 5px;"></span> High Errors	



## Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

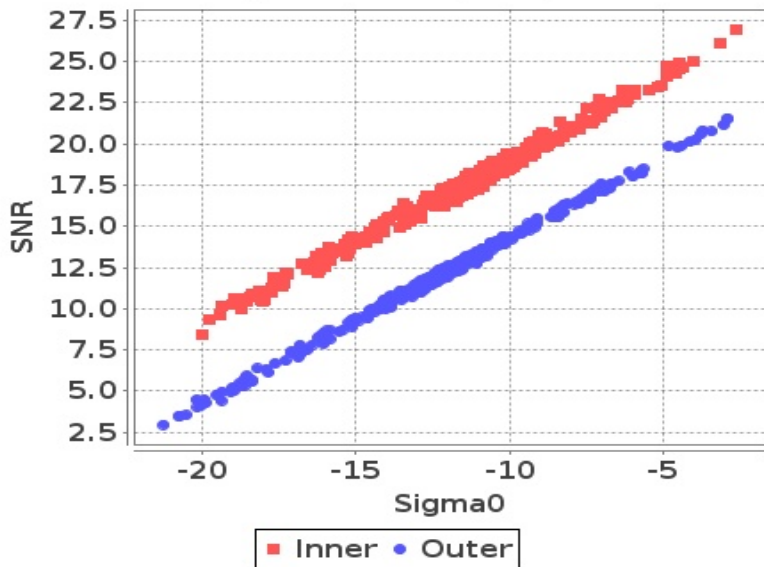


Footprint-Sea

Sigma0 Vs SNR (Sea)

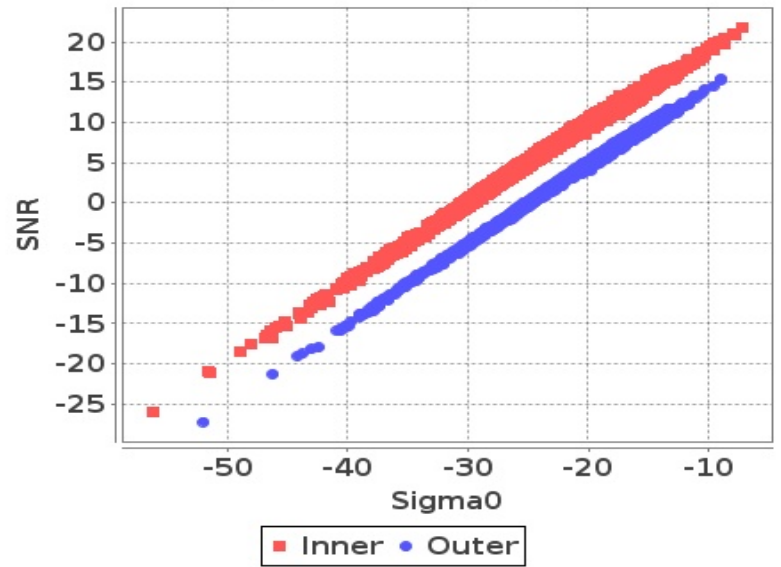


Slice-Land

Sigma0 Vs SNRatSlice (Land)

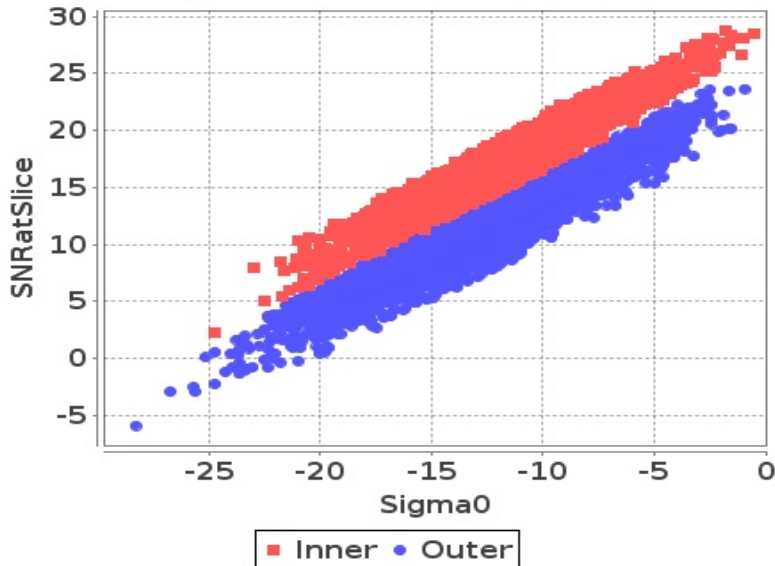

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

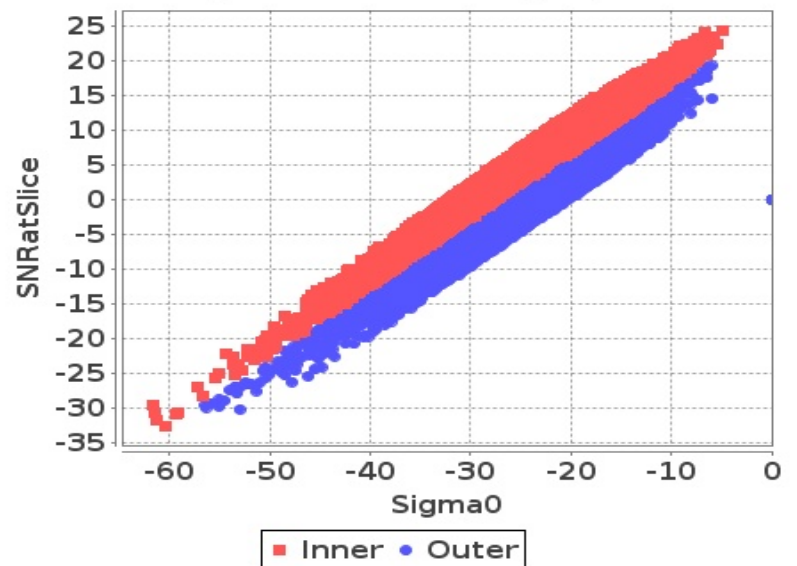

## Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

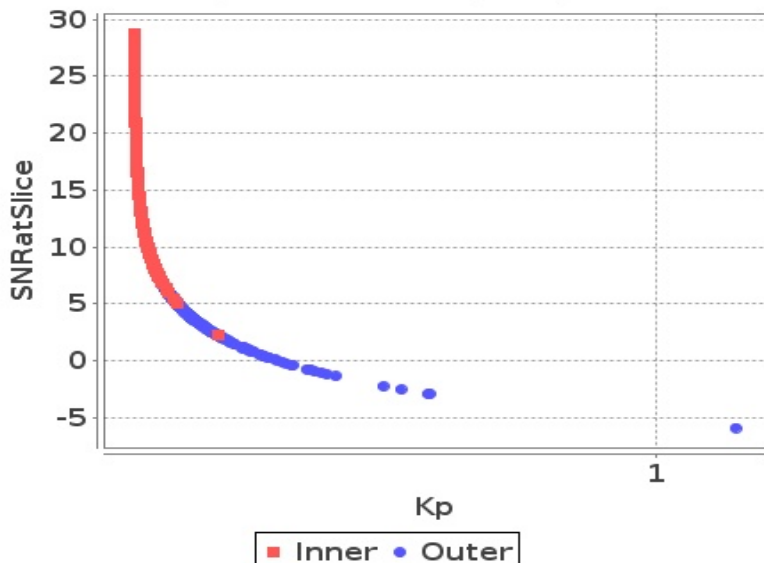

Slice


Kp Vs SNRatSlice (Sea)

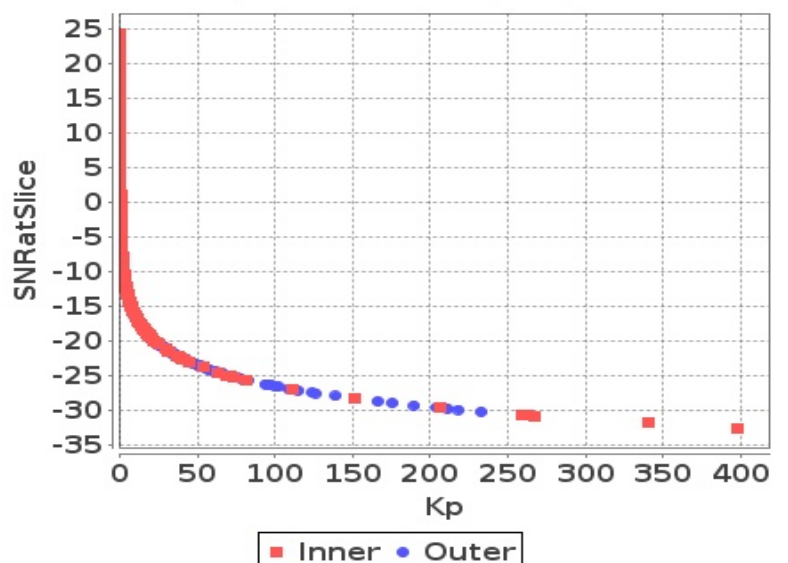

# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

### Sigma0 Vs Kp (Land)

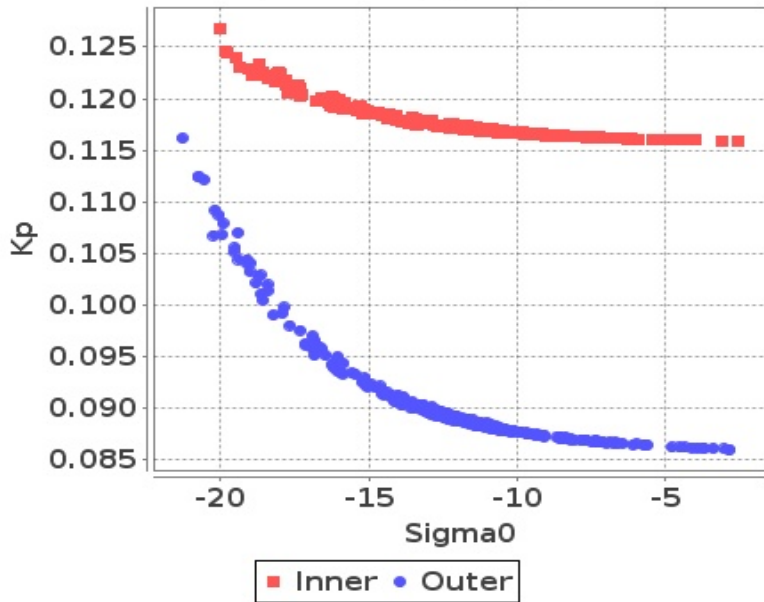


## Footprint-Sea

### Sigma0 Vs Kp (Sea)

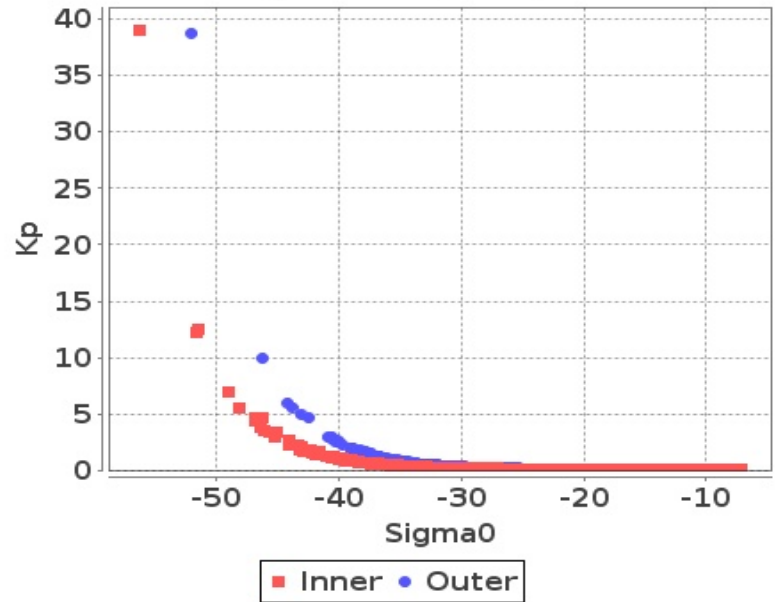


## Slice-Land

### Sigma0 Vs KpatSlice (Land)

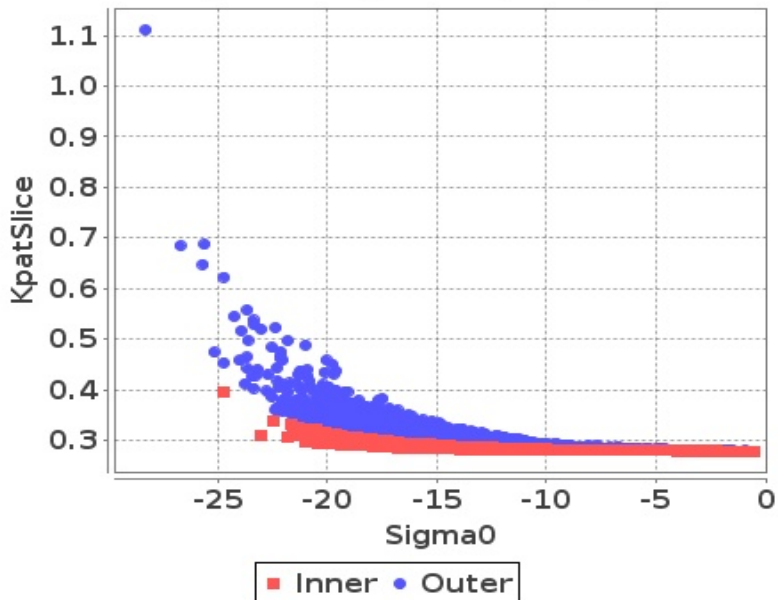

## Slice-Sea

### Sigma0 Vs KpatSlice (Sea)

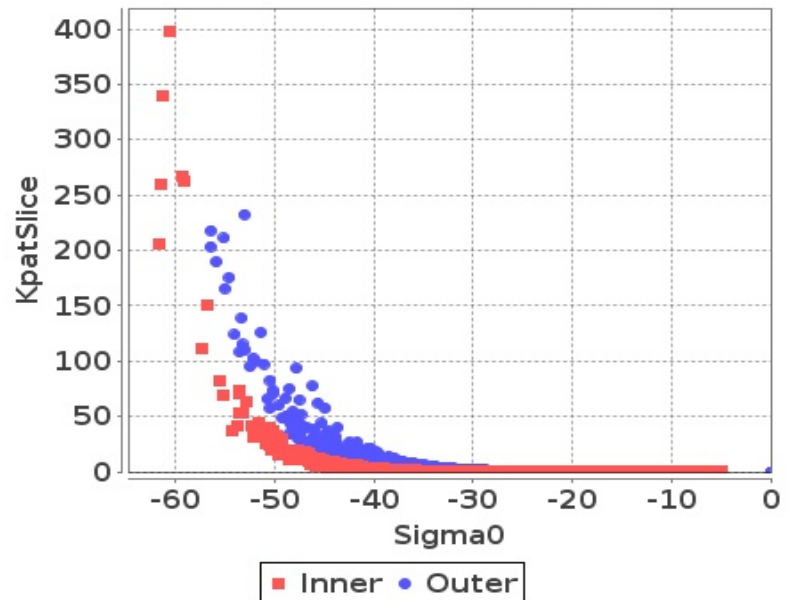







# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-22	-21	-64	-64
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-22	-23	-58	-59
Max	0	0	0	0

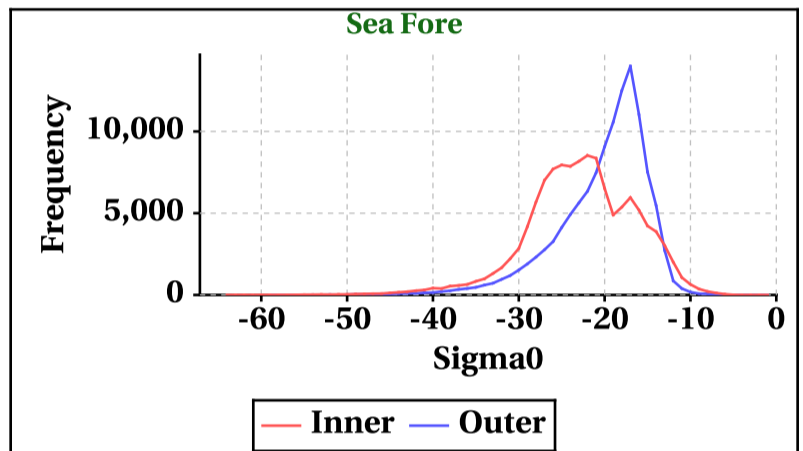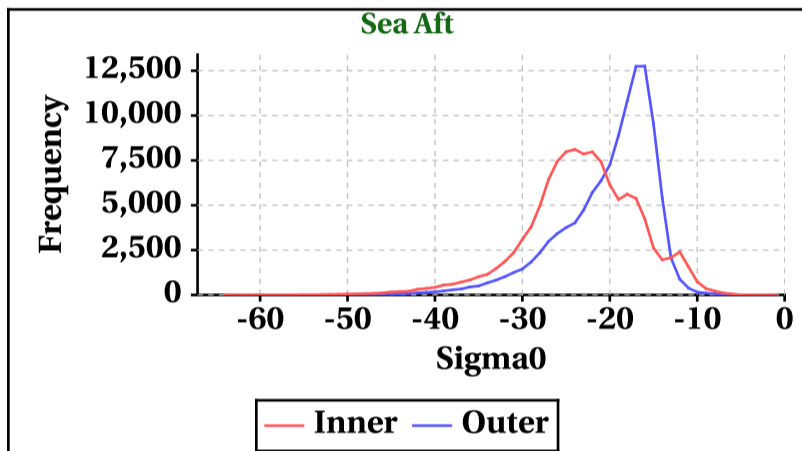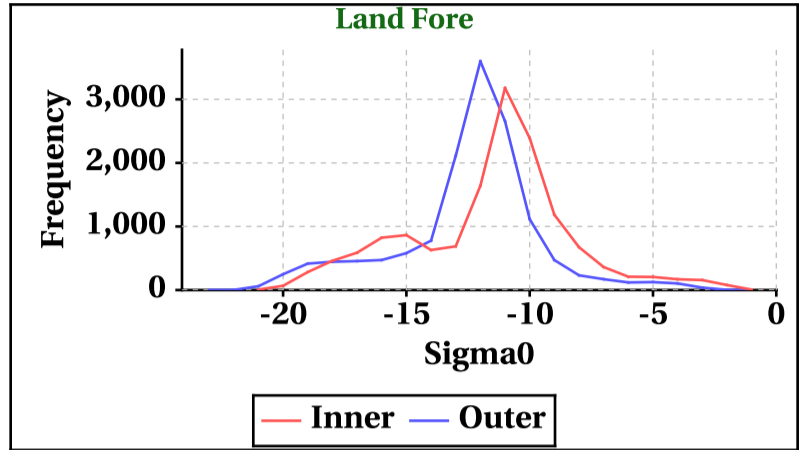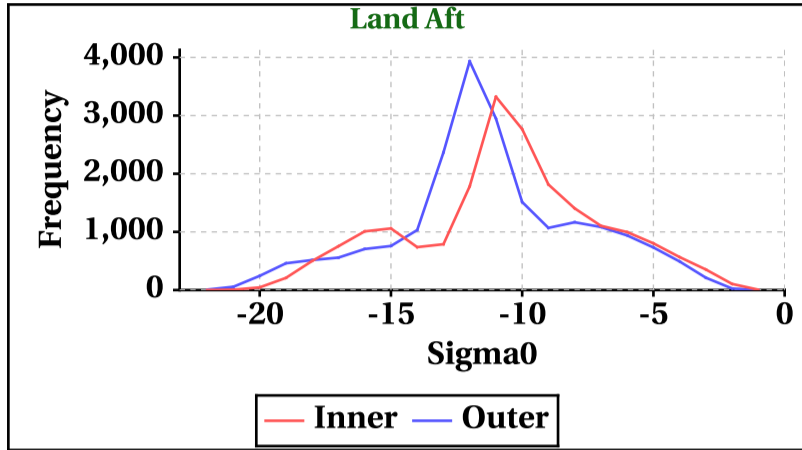

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	279	267	258	240

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	264	264	243	240

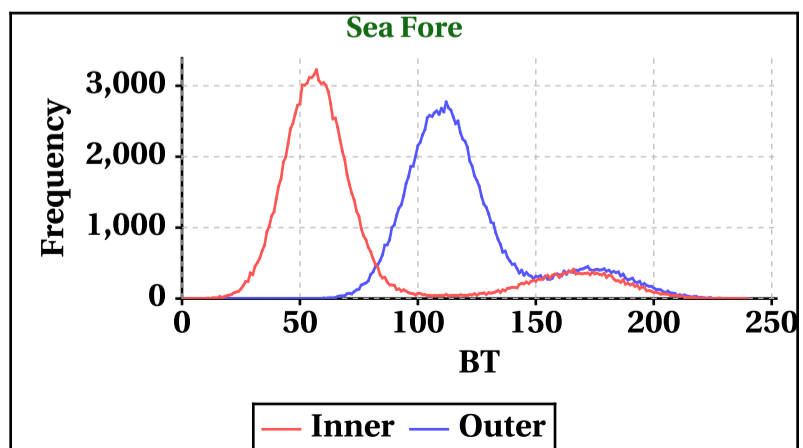
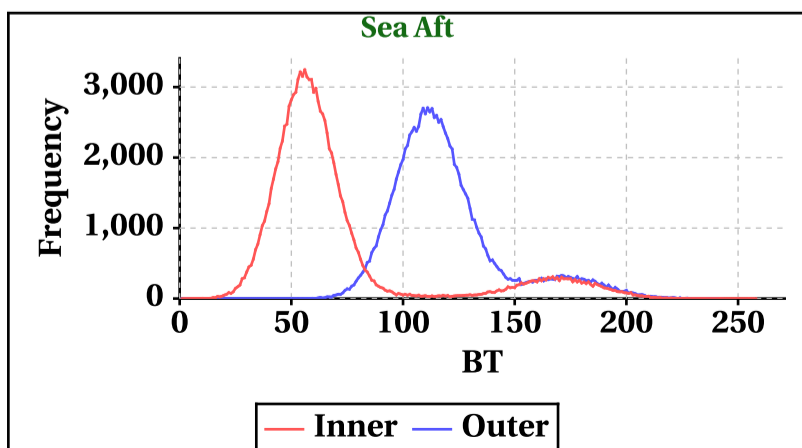
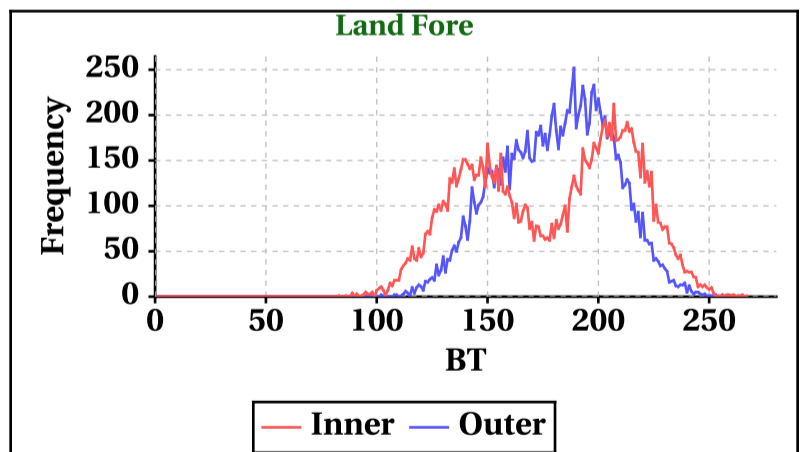
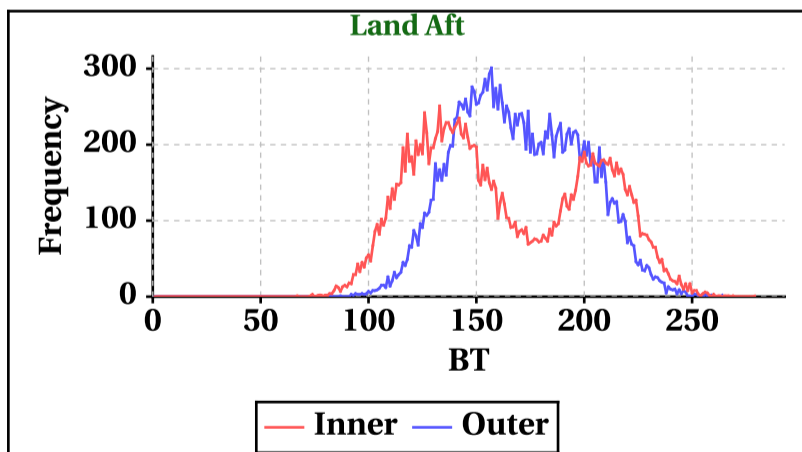


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	-34	-33
Max	27	28	23	23

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	-33	-34
Max	22	21	17	17

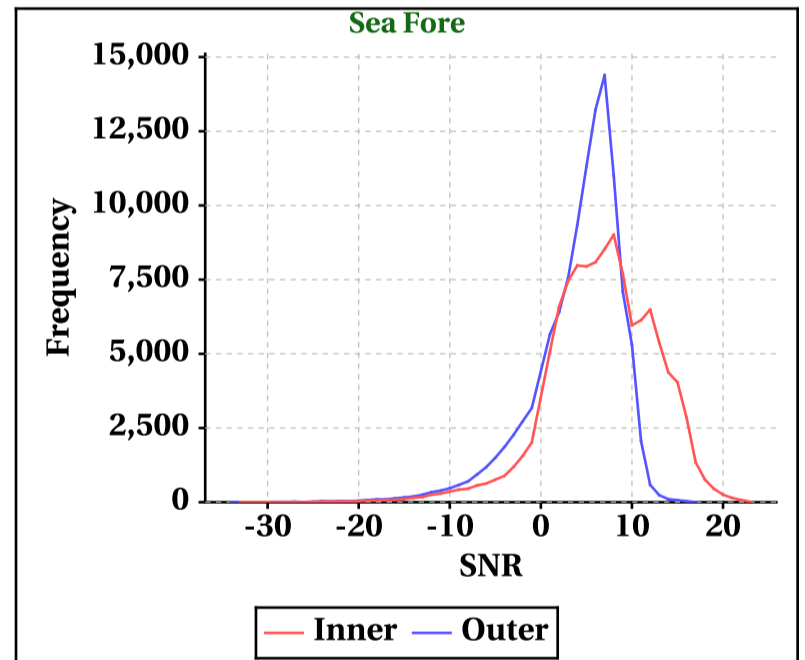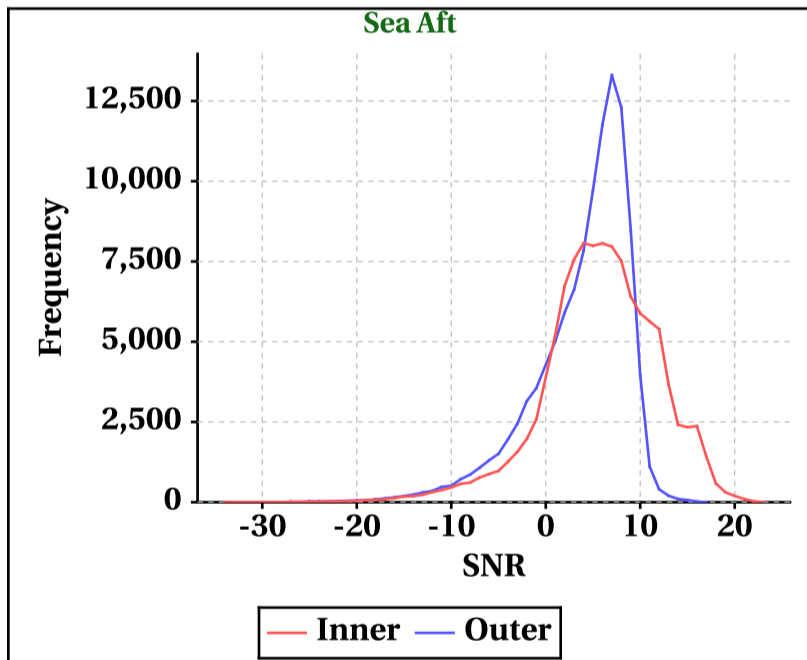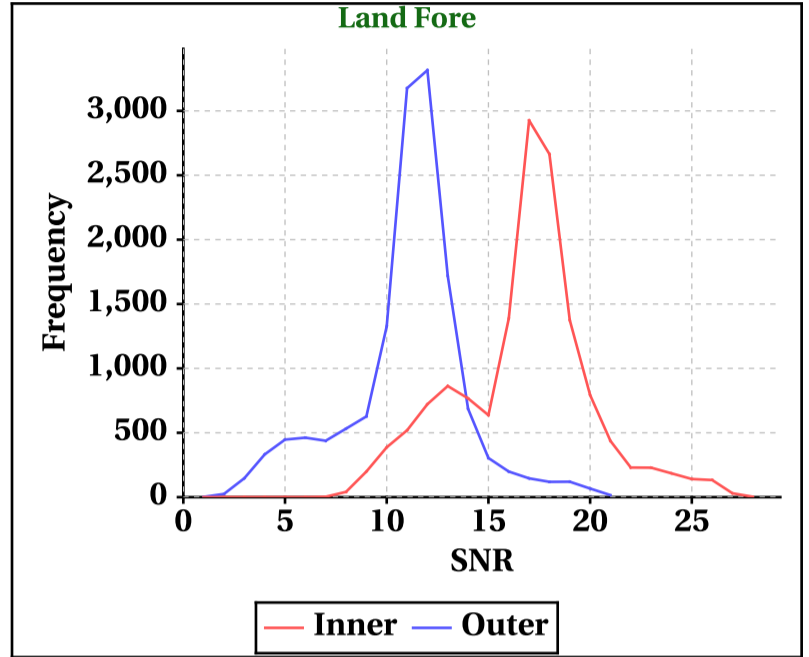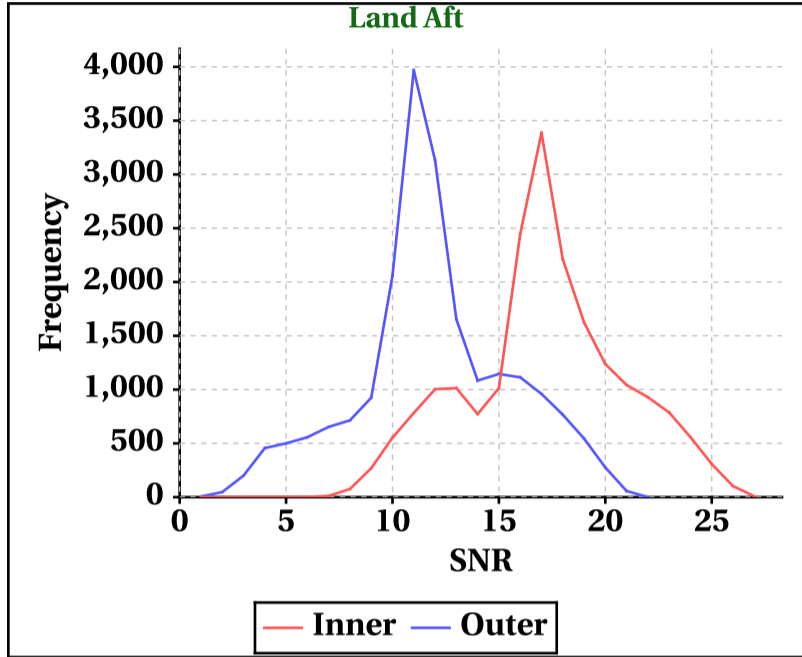


## Orbit-wise behaviour of SNR

Inner Beam (HH)

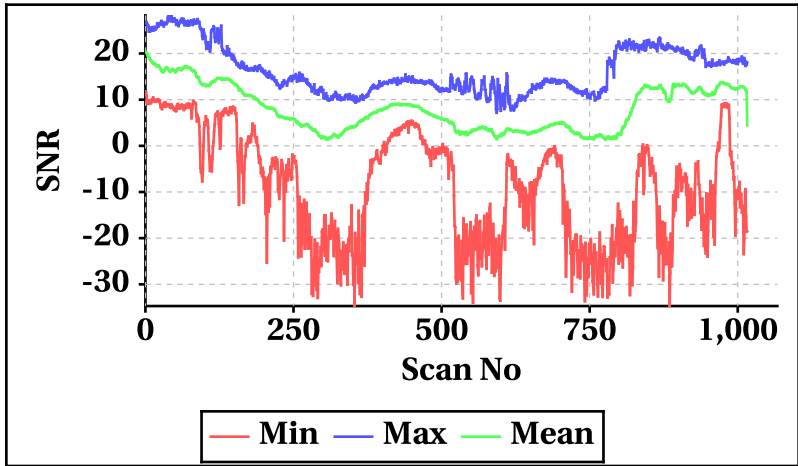


Outer Beam(VV)

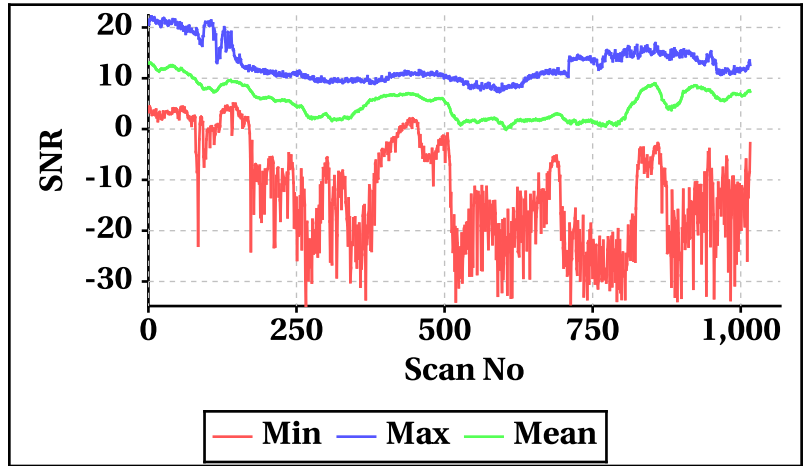


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

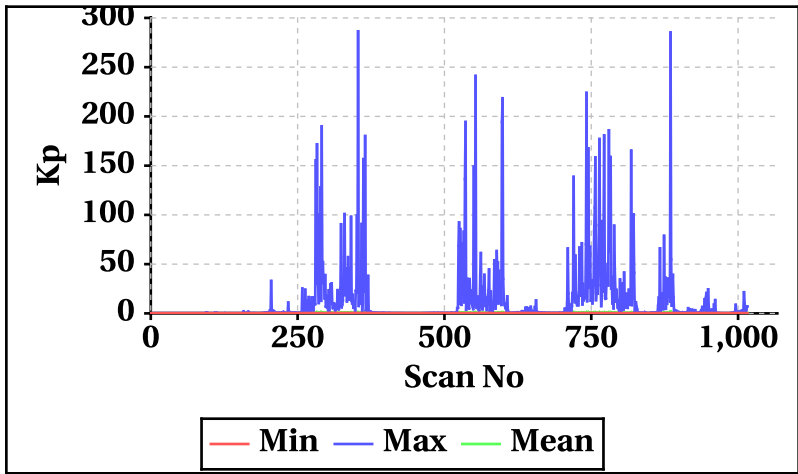


Outer Beam(VV)

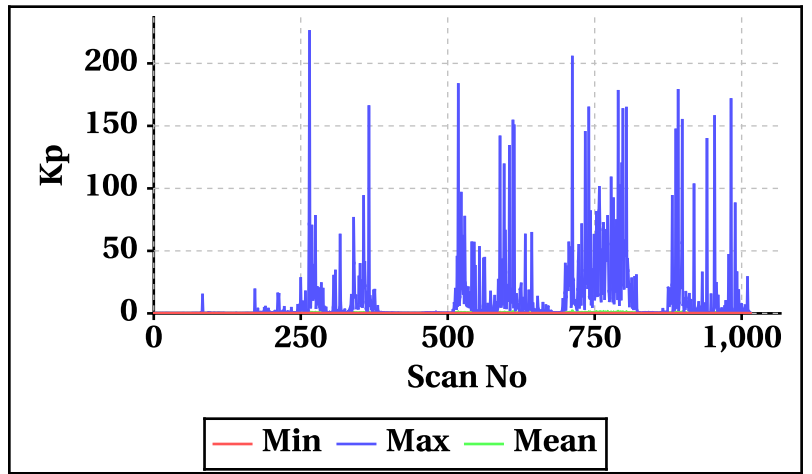


Inner Beam(HH)

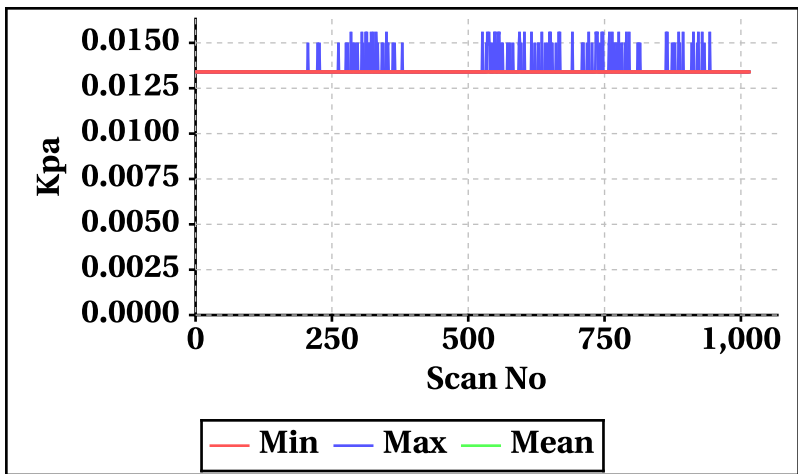


Outer Beam(VV)

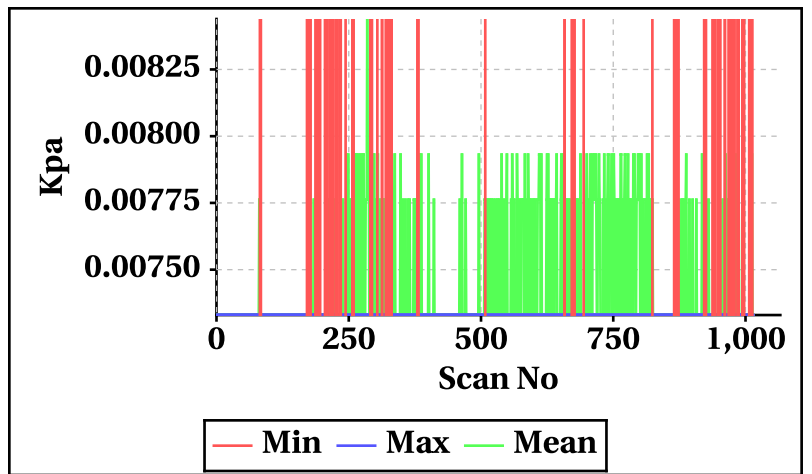


Inner Beam(HH)

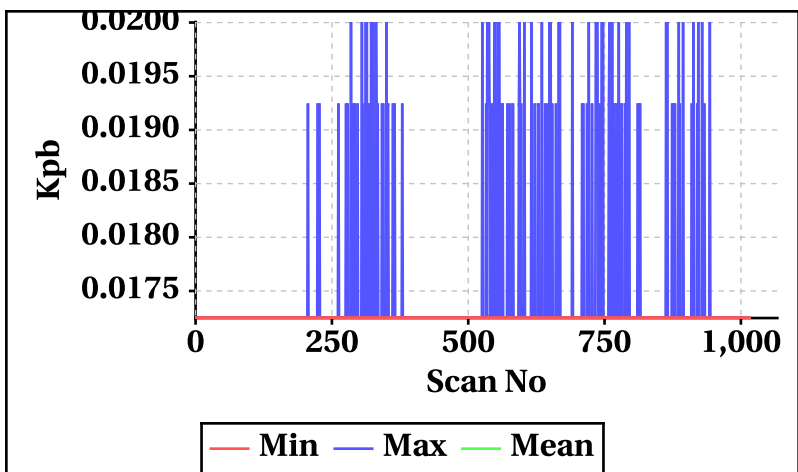


Outer Beam(VV)

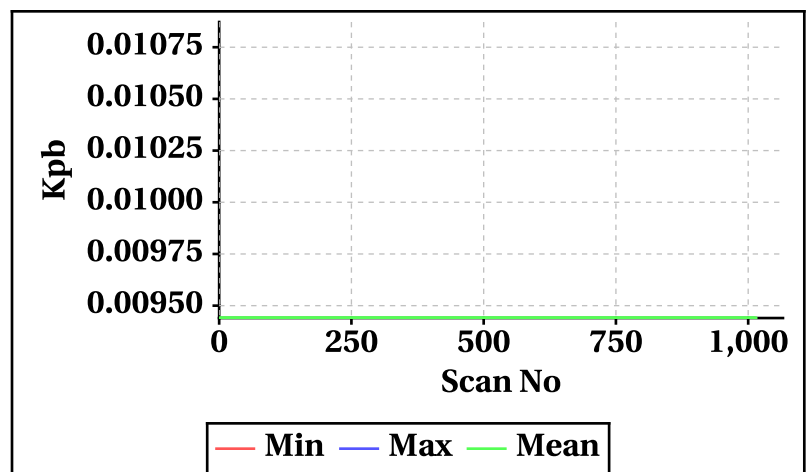

Inner Beam(HH)

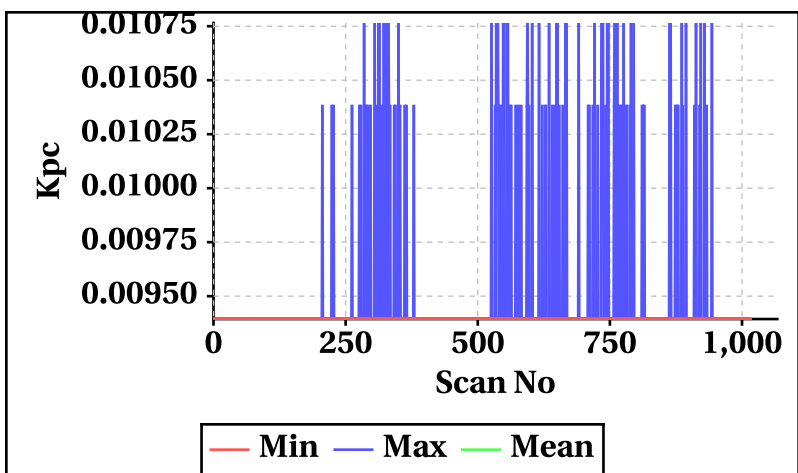


Outer Beam(VV)

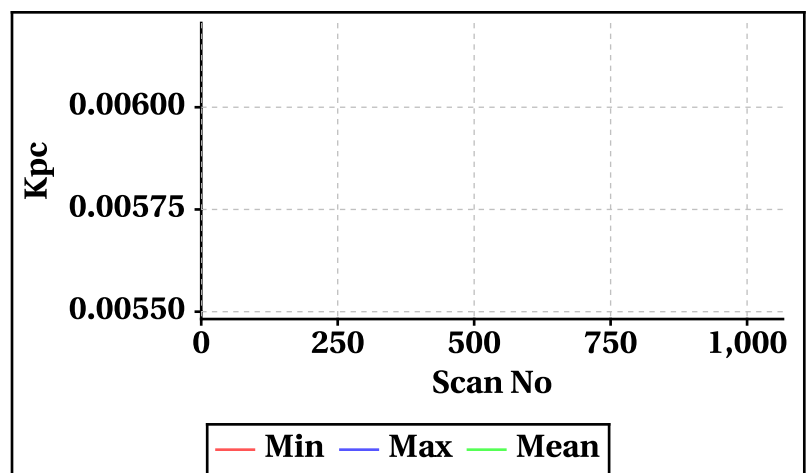


Orbit-wise behaviour of Incidence, Azimuth, Range, X-Factor


Inner Beam (HH)

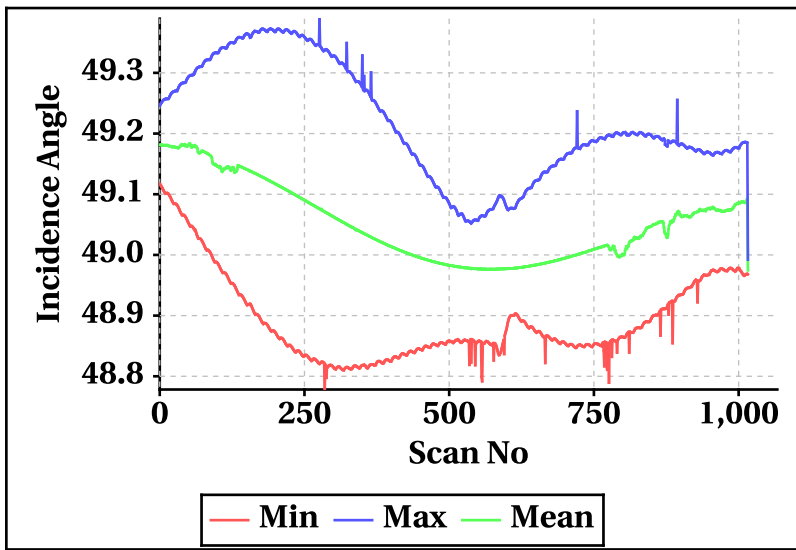


Outer Beam(VV)

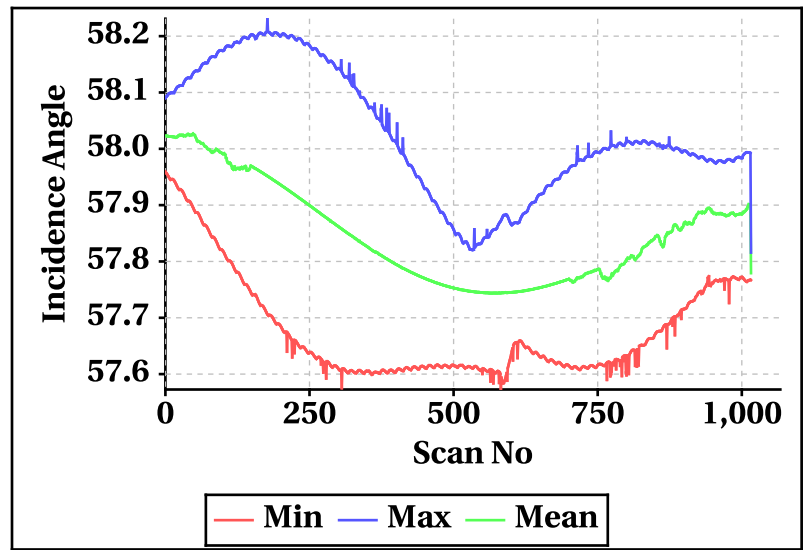


Inner Beam (HH)

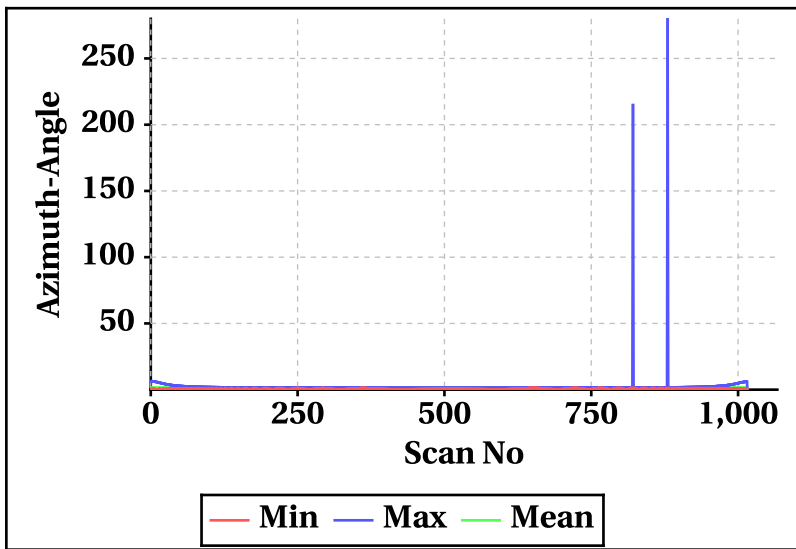


Outer Beam(VV)

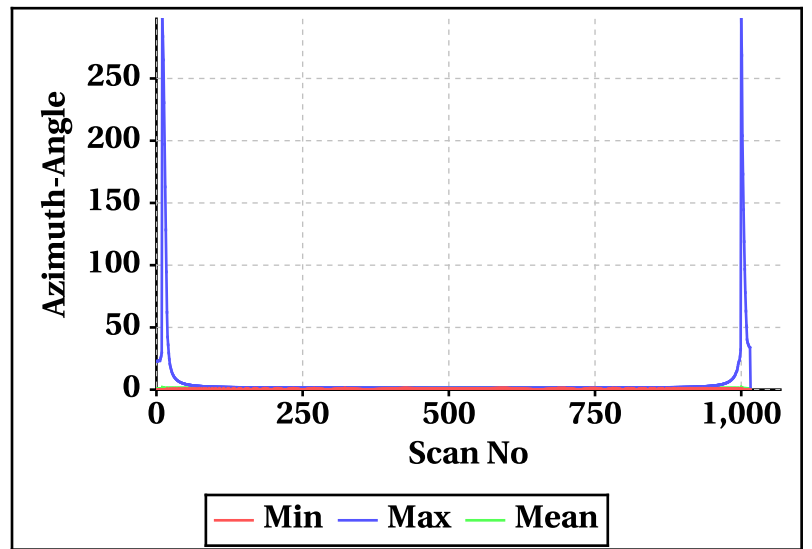


Inner Beam (HH)

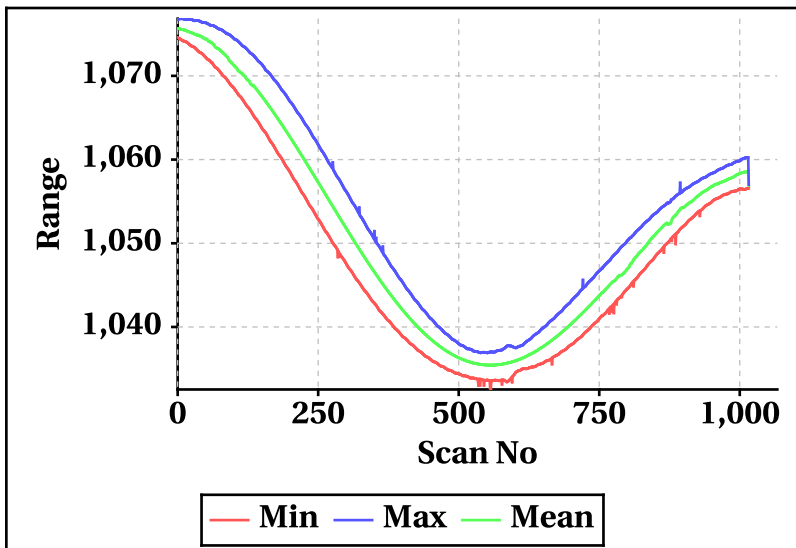


Outer Beam(VV)

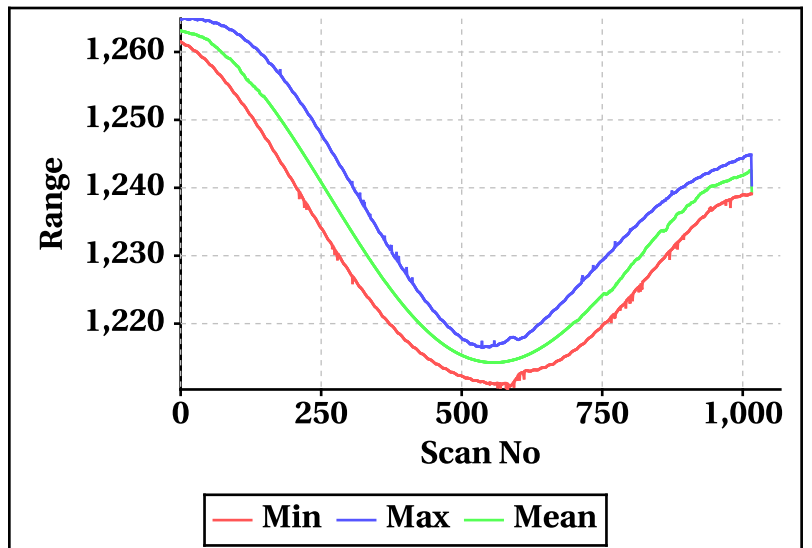

Inner Beam (HH)

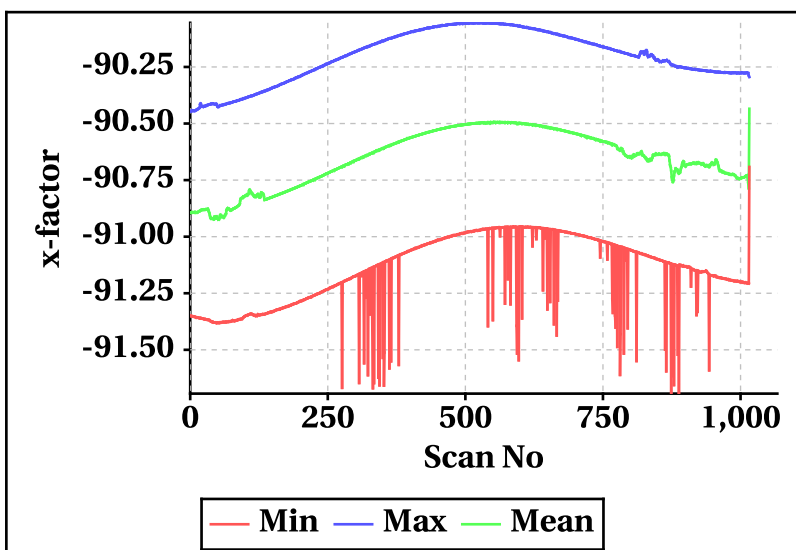

Outer Beam(VV)

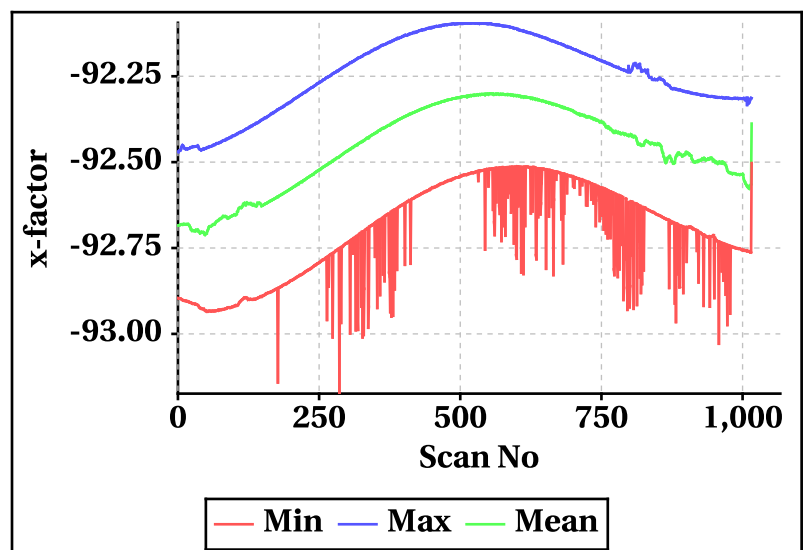




# Doppler Frequency Variation


Doppler Frequency(KHz) variation statistics Over the half Orbit

	Inner Beam (HH)	Outer Beam (VV)
Min	-463.40	-519.32
Max	463.48	519.40

Footprint wise Doppler frequency variation Inner Beam (HH)

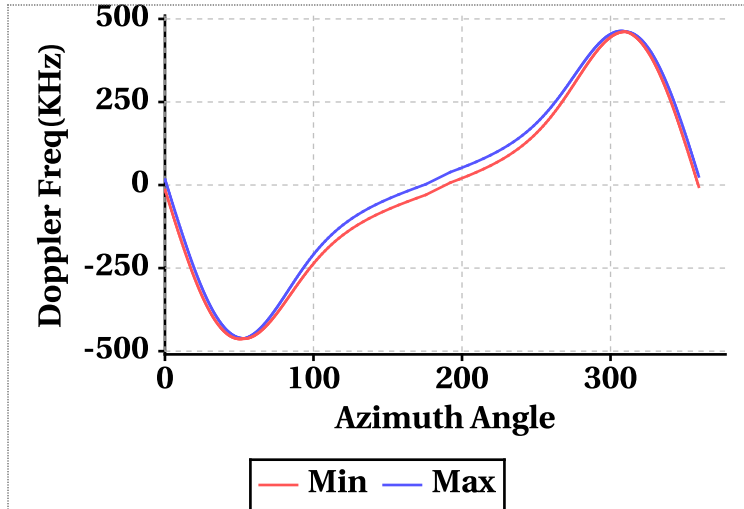


Footprint wise Doppler frequency variation Outer Beam (VV)

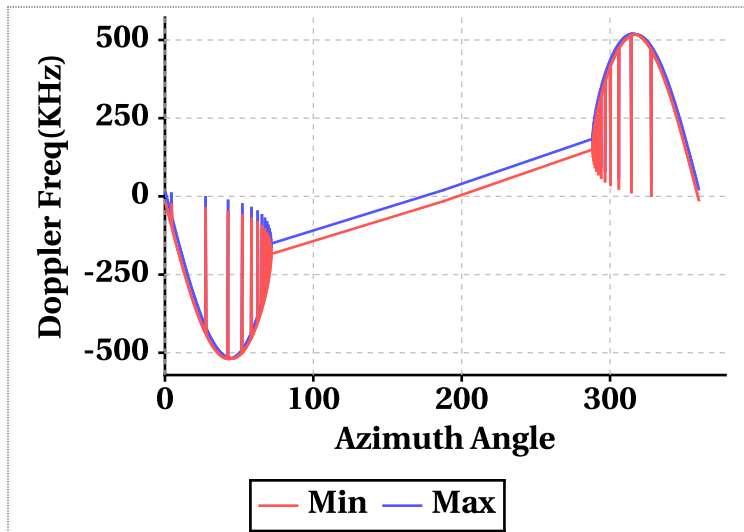


Doppler Frequency(KHz) variation

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	7.28	38.94	27.49	2.64	38.00	25.19
Doppler_70	457.64	463.04	462.30	513.74	519.12	518.23
Doppler_140	-15.48	457.64	-3.74	-23.24	513.74	-10.03
Doppler_210	-463.32	457.64	-461.68	-519.10	513.74	-517.39
Doppler_280	-19.24	457.64	1.53	-15.58	513.74	7.60

Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)

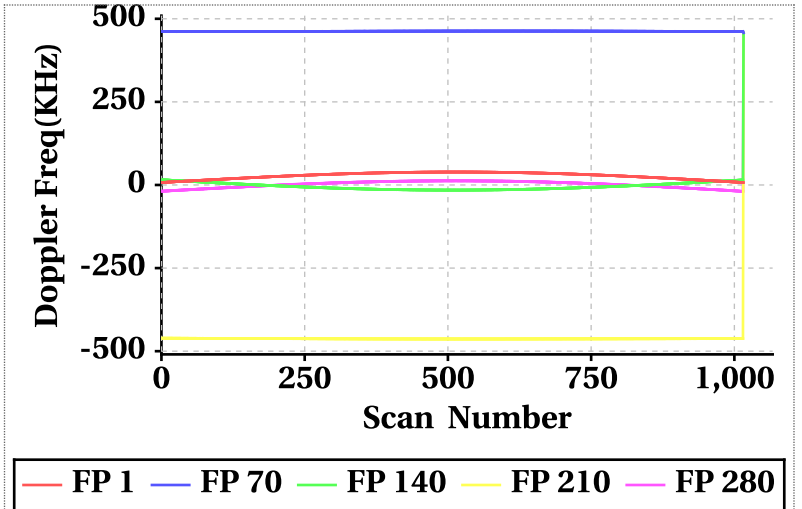


Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)

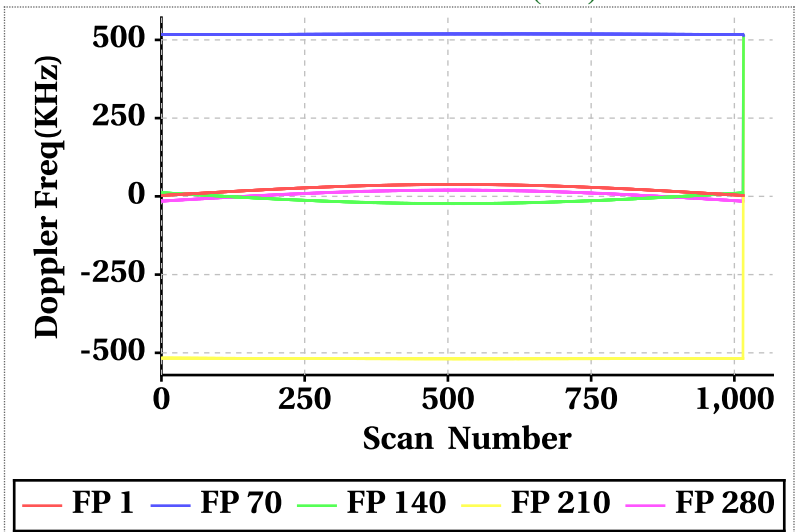


# Latitude Vs Doppler Frequency

Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]

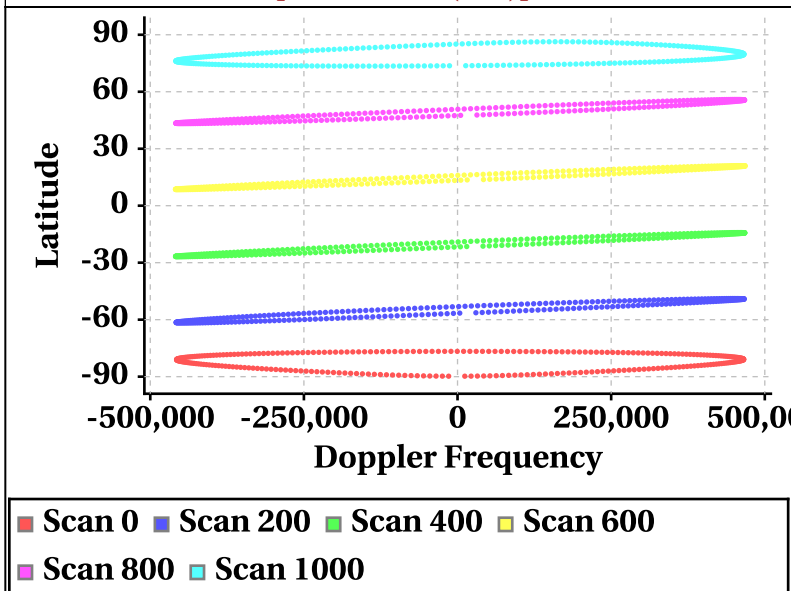


Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]

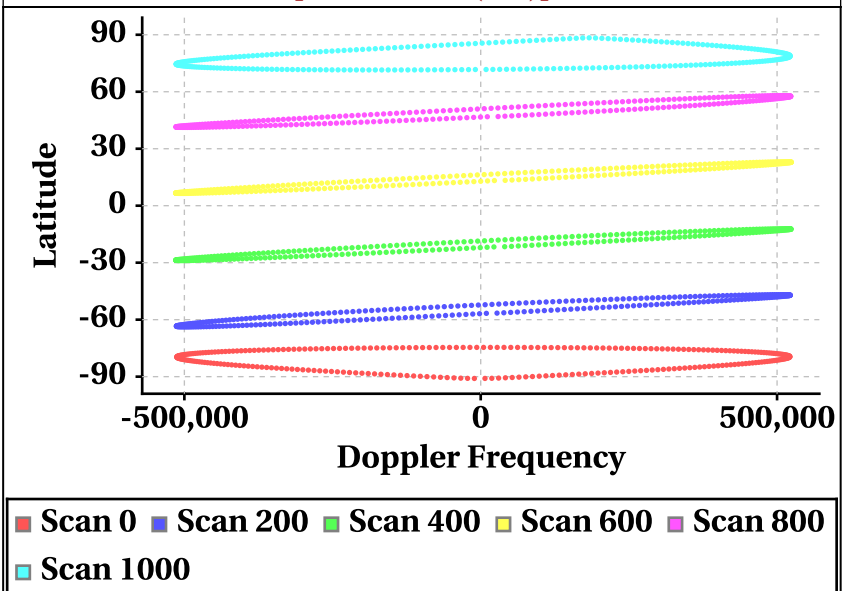

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

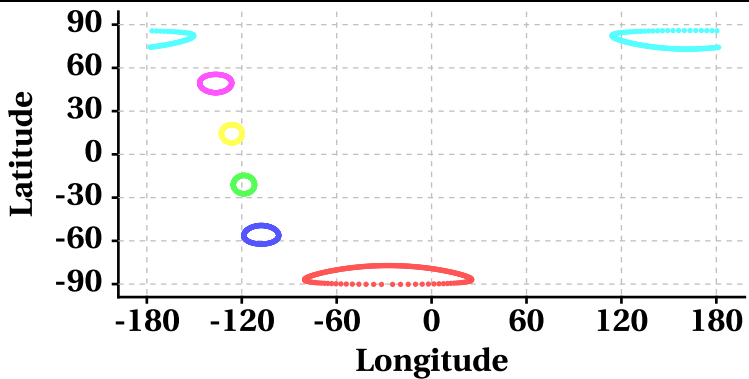

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Scan Trace [Outer Beam (VV)]

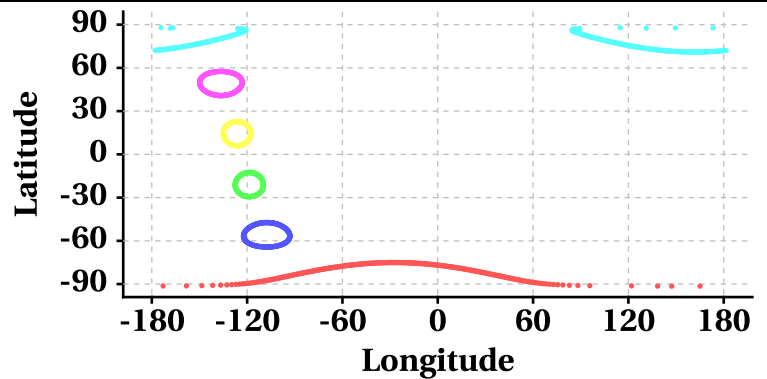

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

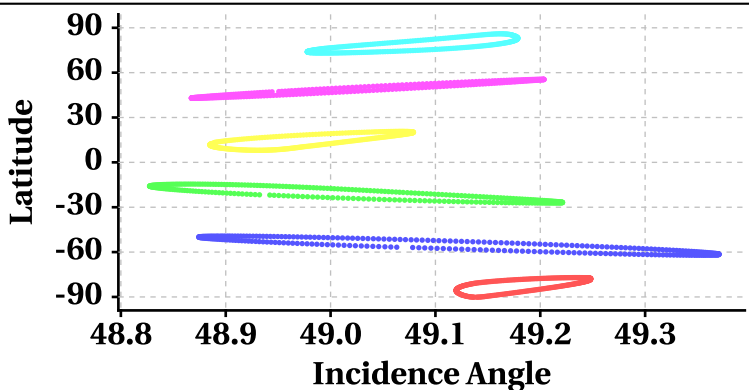

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

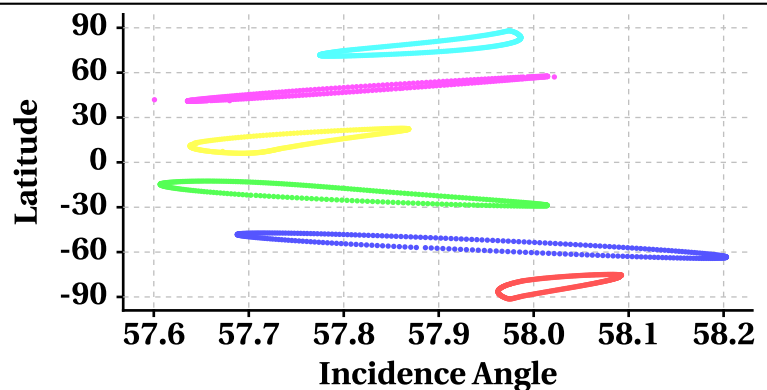

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

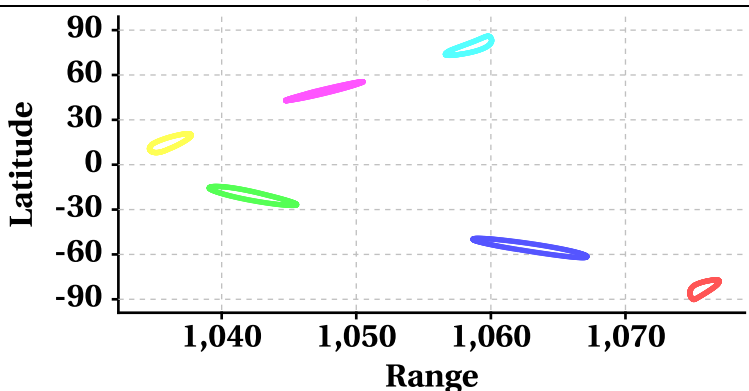

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

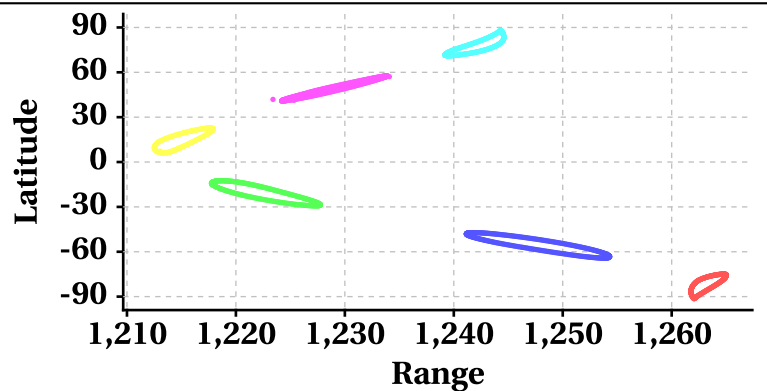

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000



# Variation in Orbit and Attitude Parameters

