


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents


- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	13879	<b>Total Scans</b>	1016
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	13880	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	v1.1.3	<b>Rev. Number</b>	13879_13880	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	NS	<b>Data Production Date</b>	11-05-2019	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	11-05-2019	<b>Equator Crossing Time</b>	09:51:06.000	<b>No Of Outer Slices</b>	15


## Brightness Temperature(k) Footprint trace

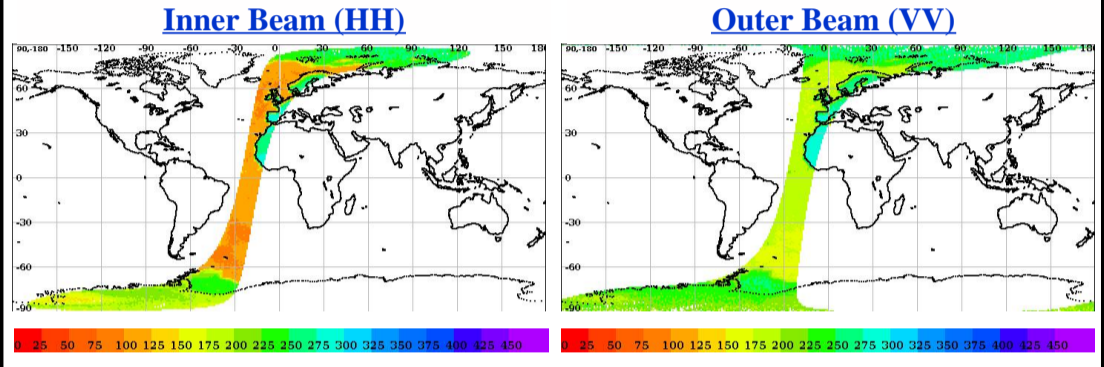

## Image Snapshot for Inner & Outer Beam

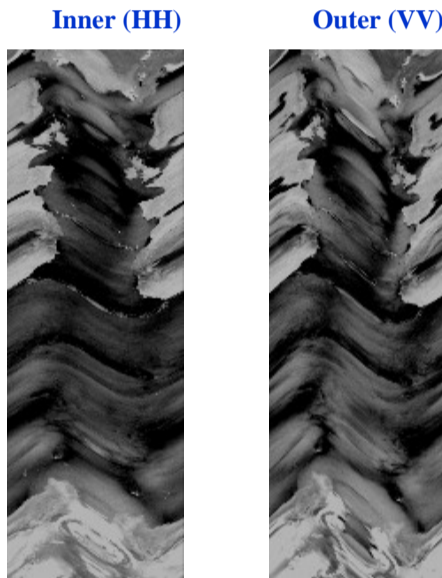

## Sigma0(dB) Footprint trace

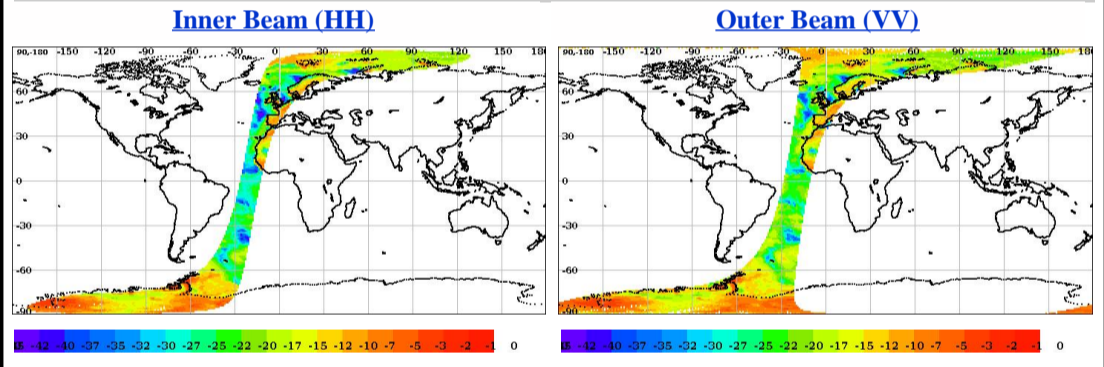


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.00	0.00
Data Not Available From Payload (%)	0.0	0.0
Slice not within sample array limits (%)	0.00	100.00
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	22.23	13.34
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	0.038521	0.07134


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

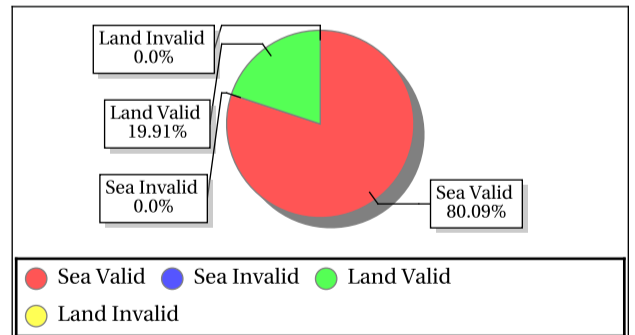

### Outer Beam (VV)

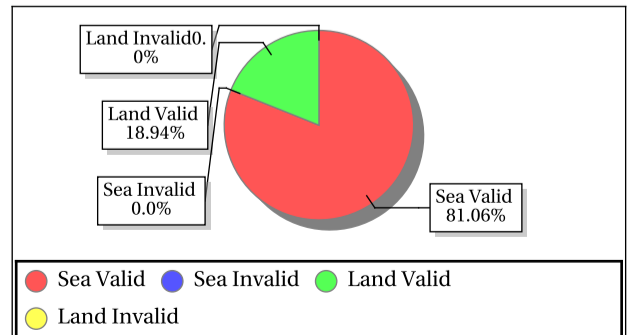

## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.12	298.91	0.29	2.359	0.12	292.70	0.30	2.416	0.12	0.52	0.12	0.000	0.12	0.75	0.12	0.000
<b>Kpa</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.02	0.01	0.000
<b>Kpb</b>	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000	0.02	0.02	0.02	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.89	27.17	5.55	0.163	-34.80	28.45	5.79	0.279	-6.41	31.24	17.44	11.957	-8.29	33.19	18.03	17.465

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.09	231.62	0.24	1.739	0.09	213.31	0.23	1.747	0.09	22.14	0.10	0.062	0.09	95.48	0.10	0.082
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.95	19.76	3.76	0.000	-34.59	20.66	4.00	0.000	-24.74	22.81	11.82	0.062	-31.10	23.27	12.45	0.269

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)

	Inner Beam (HH)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.59	49.31	48.97	0.000	57.34	58.15	57.81	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0026	267.21	1.28	2.631	0.0000	294.18	1.28	3.756	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1015.93	1085.49	1041.05	27.784	1189.41	1275.34	1221.11	43.089	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.52	-89.71	-90.33	0.000	-93.02	-91.76	-92.05	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	15.97	16.57	16.18	0.000	21.15	22.47	21.30	2.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.83	875.50	21.40	2.000	18.66	1131.77	21.81	2.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



## Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

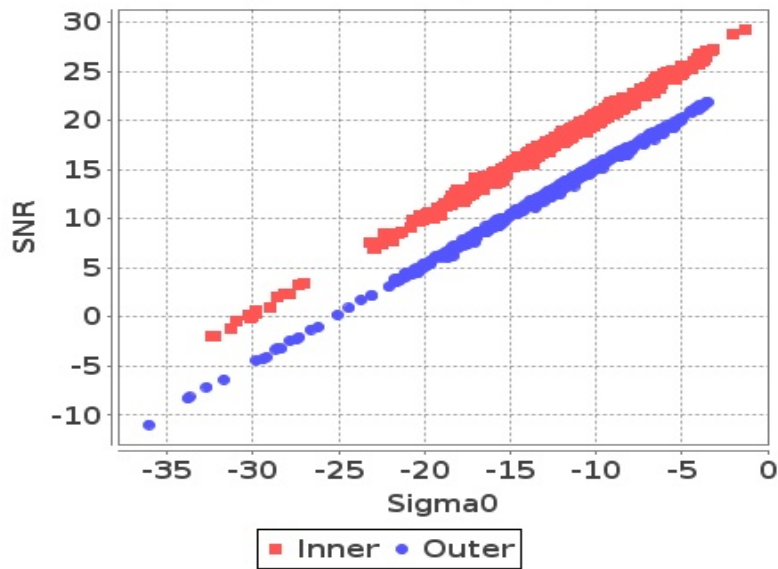


Footprint-Sea

Sigma0 Vs SNR (Sea)

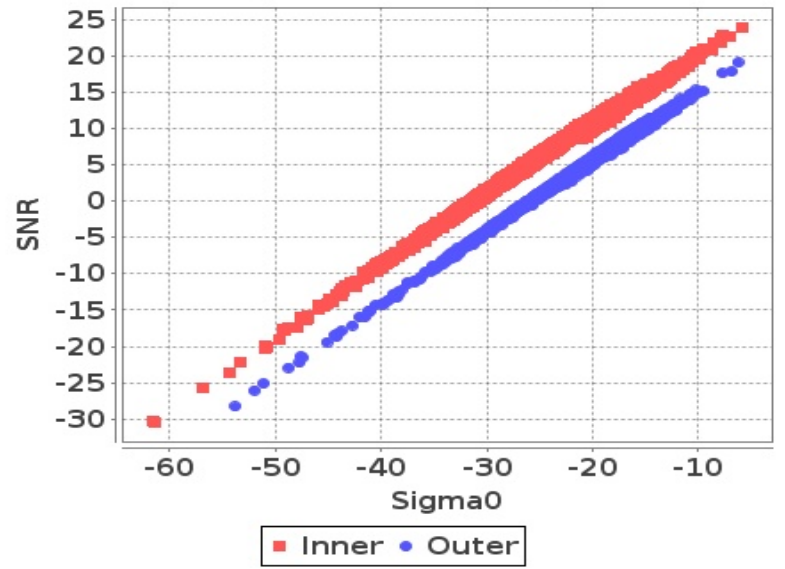


Slice-Land

Sigma0 Vs SNRatSlice (Land)

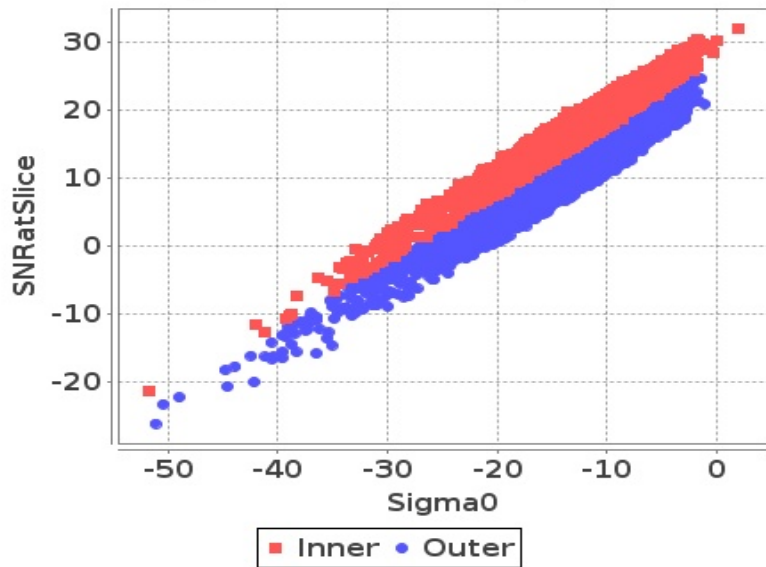

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

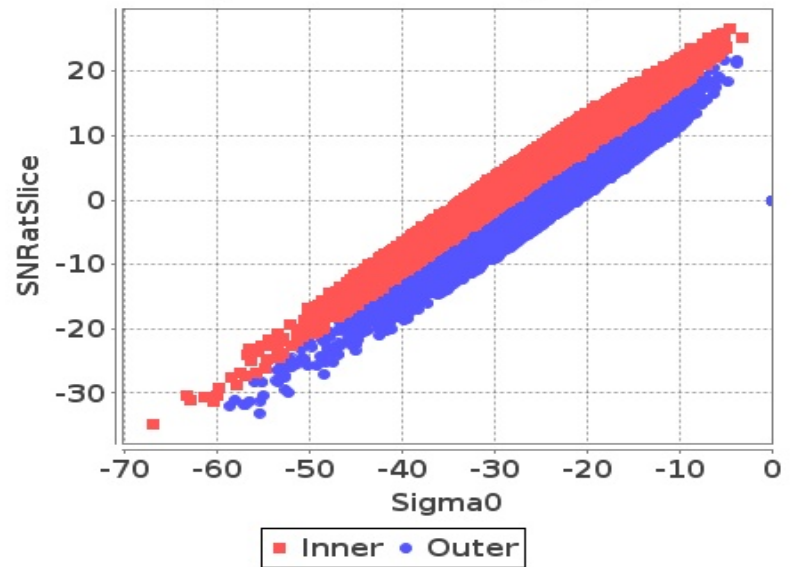

## Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

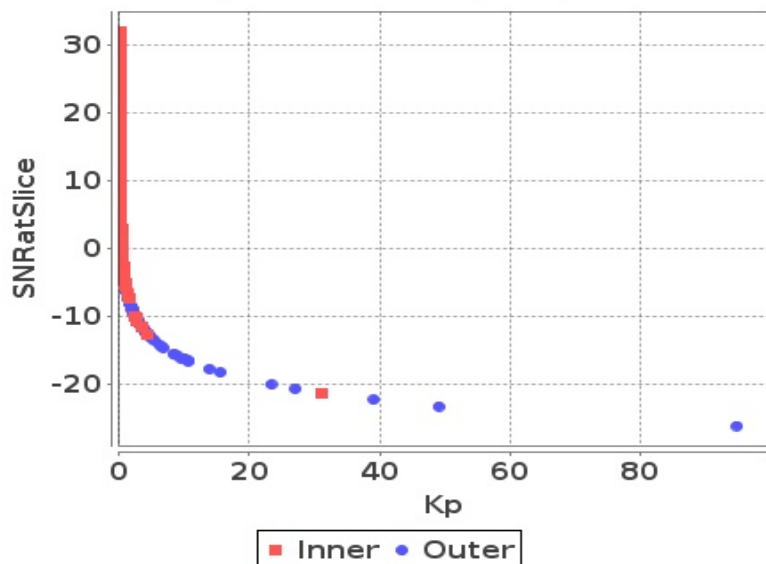

Slice


Kp Vs SNRatSlice (Sea)

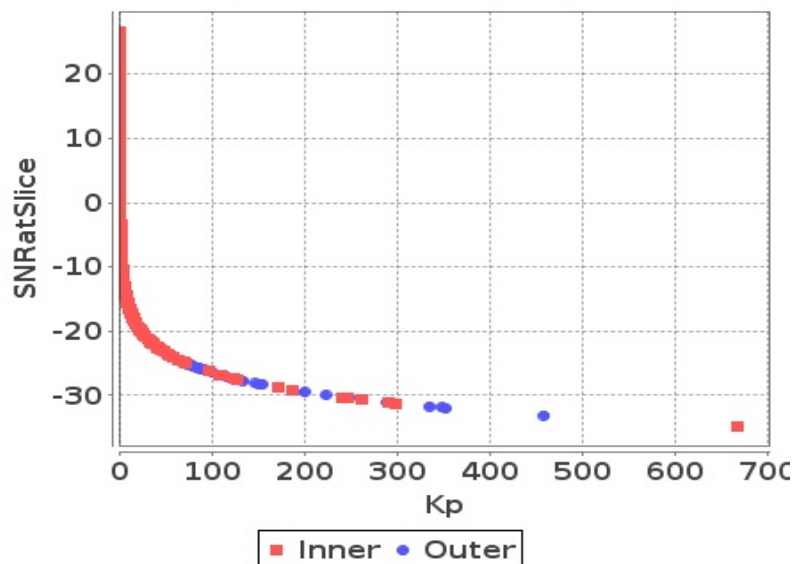

# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

### Sigma0 Vs Kp (Land)

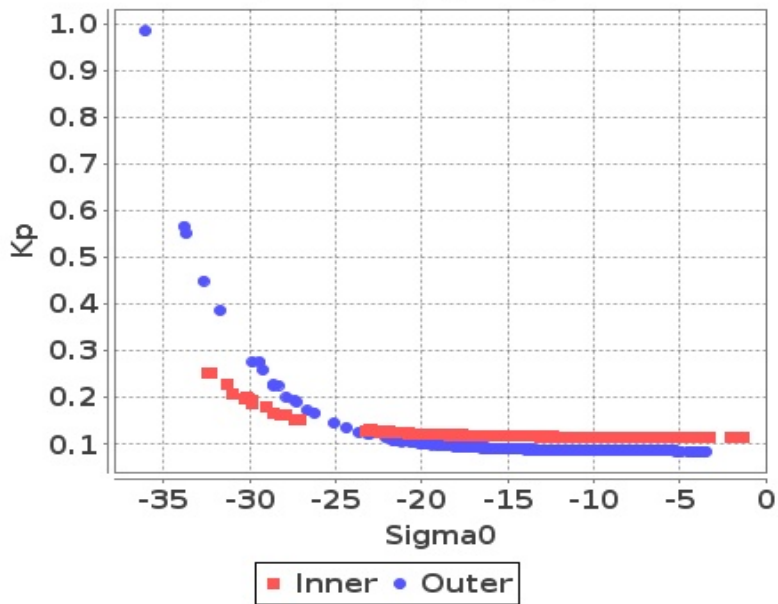


## Footprint-Sea

### Sigma0 Vs Kp (Sea)

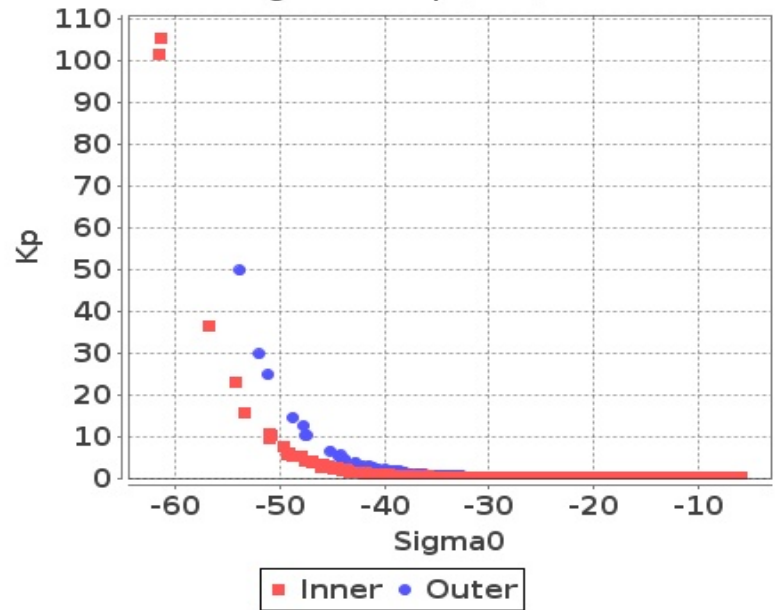


## Slice-Land

### Sigma0 Vs KpatSlice (Land)

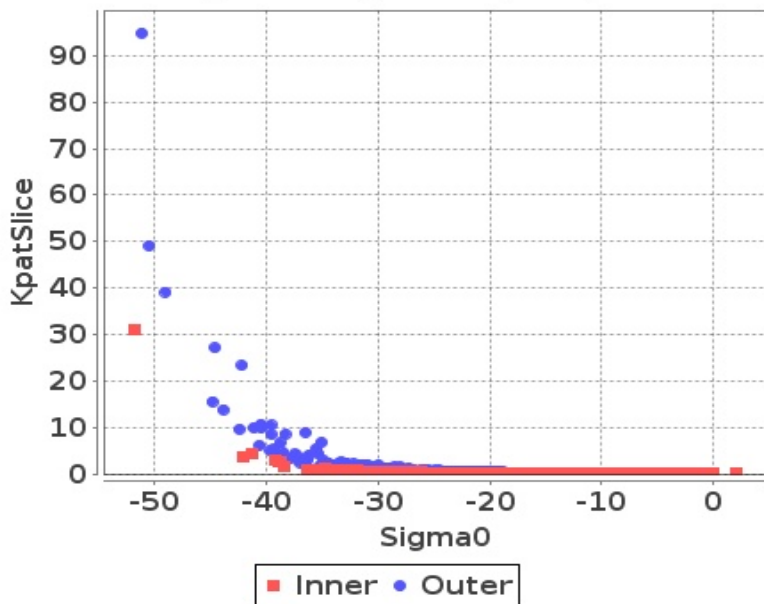

## Slice-Sea

### Sigma0 Vs KpatSlice (Sea)




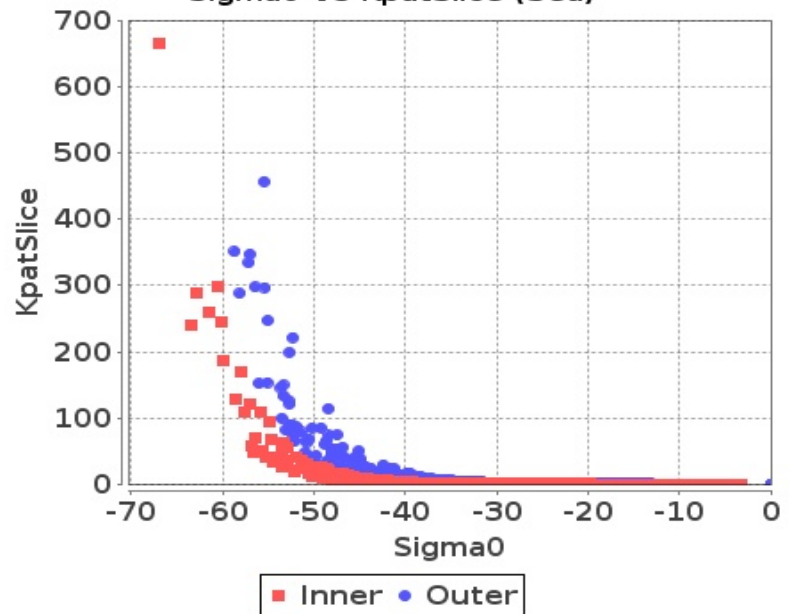


# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-36	-38	-65	-66
Max	1	3	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-49	-56	-60	-60
Max	0	0	0	0

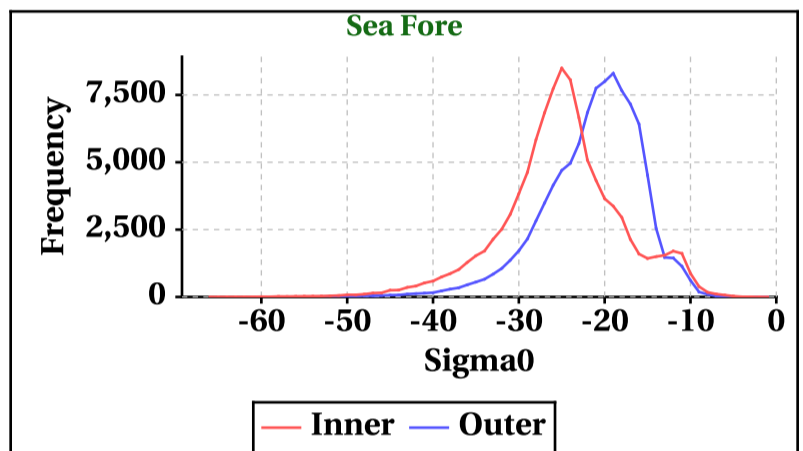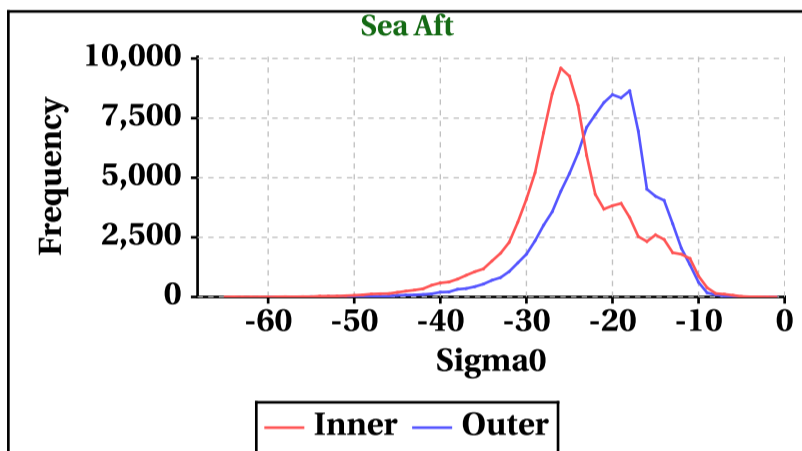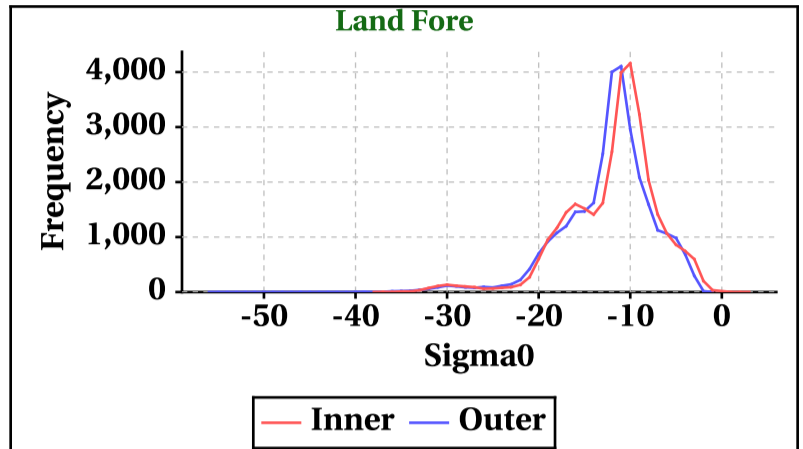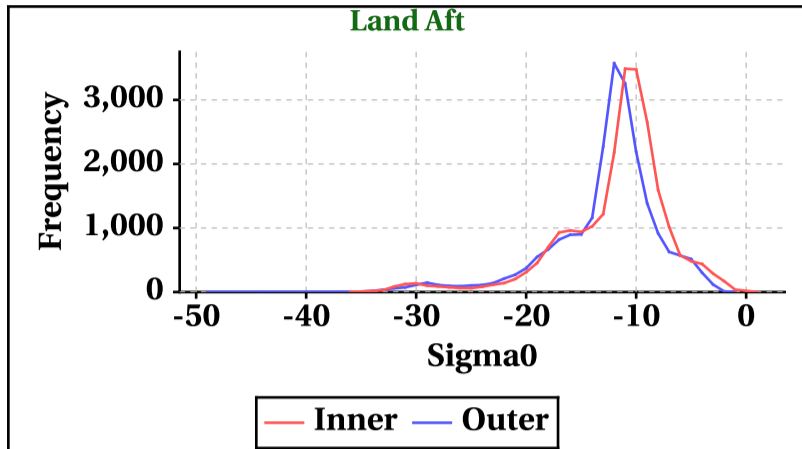

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	344	345	313	295

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	362	363	320	303

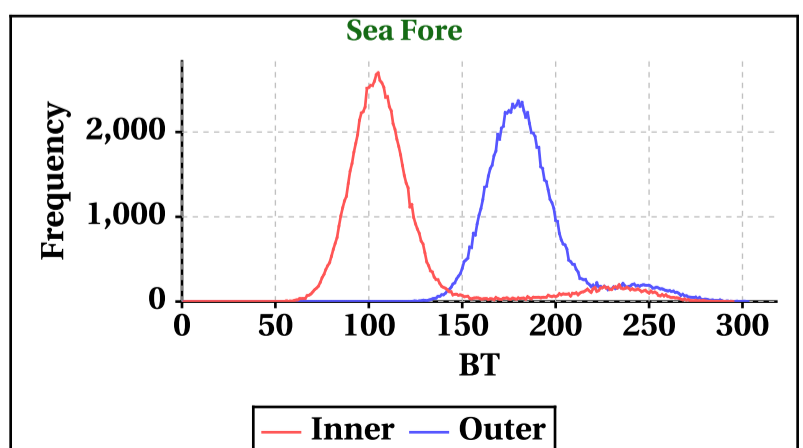
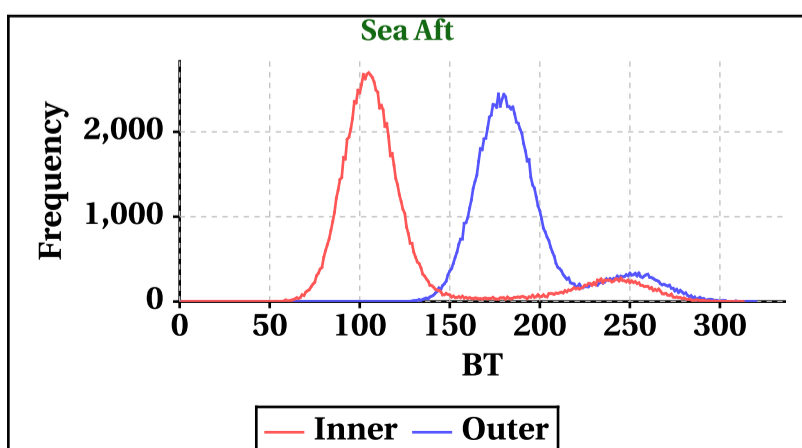
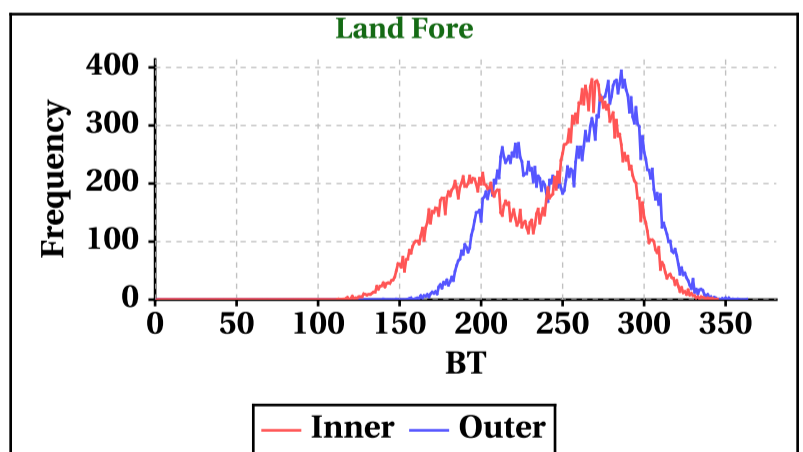
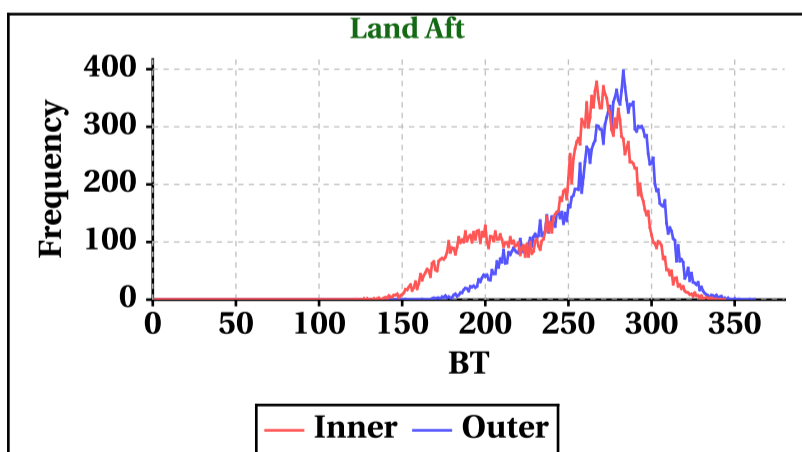


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-6	-8	-34	-34
Max	31	33	27	28

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-24	-31	-34	-34
Max	22	23	19	20

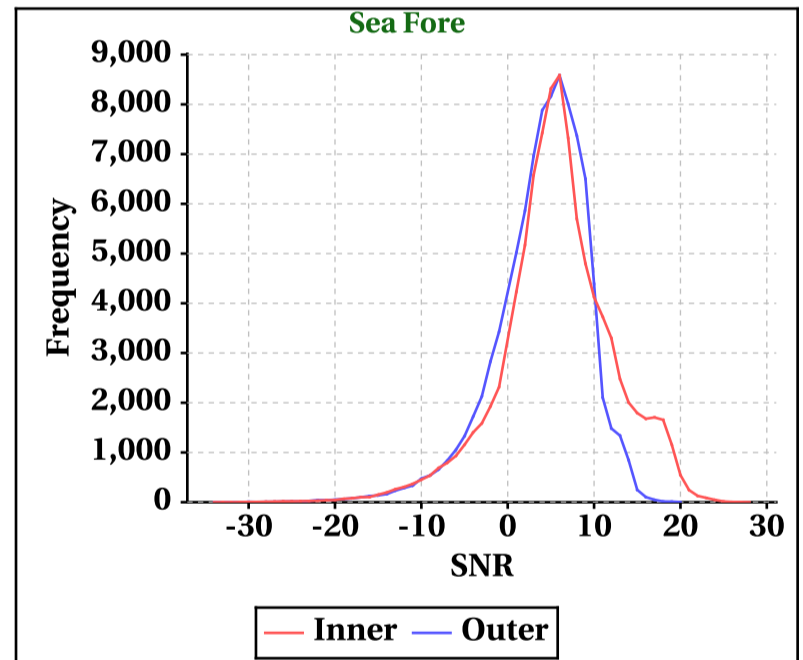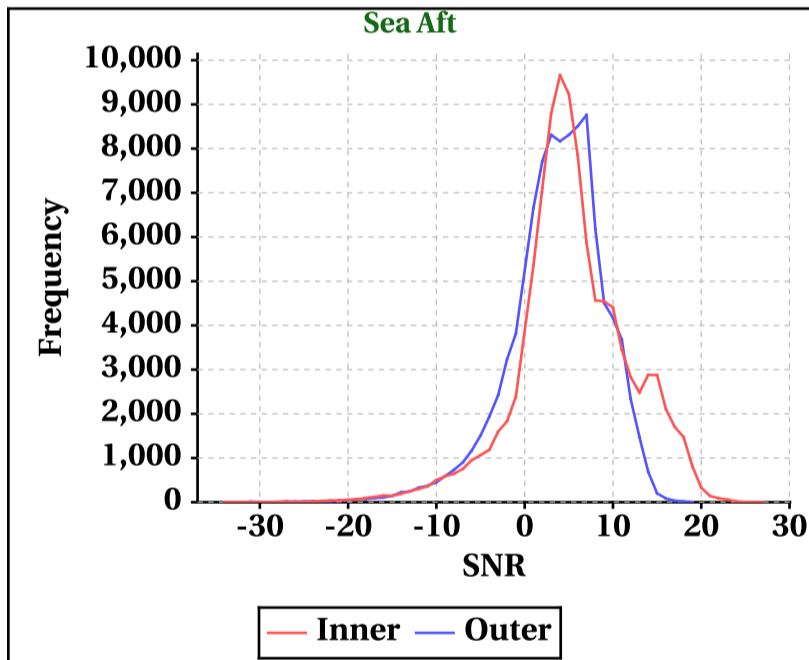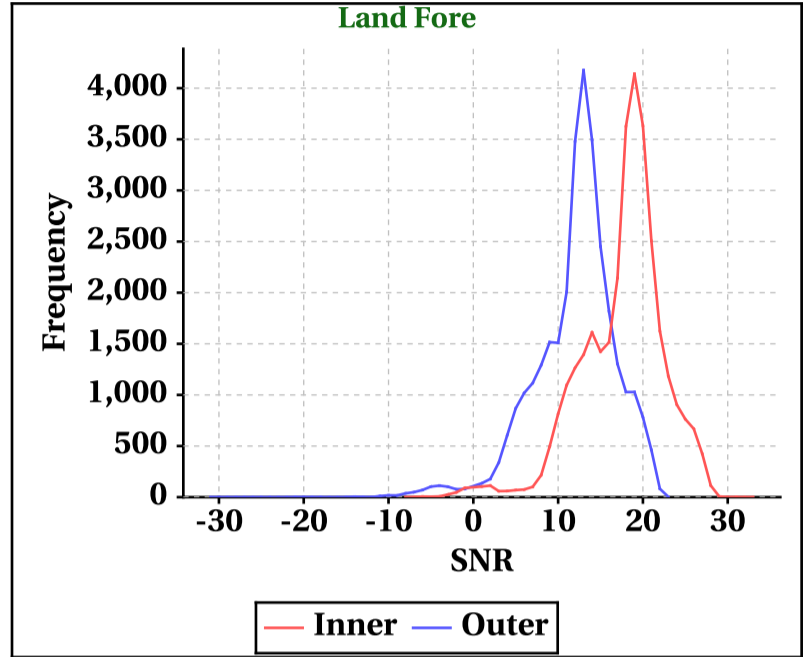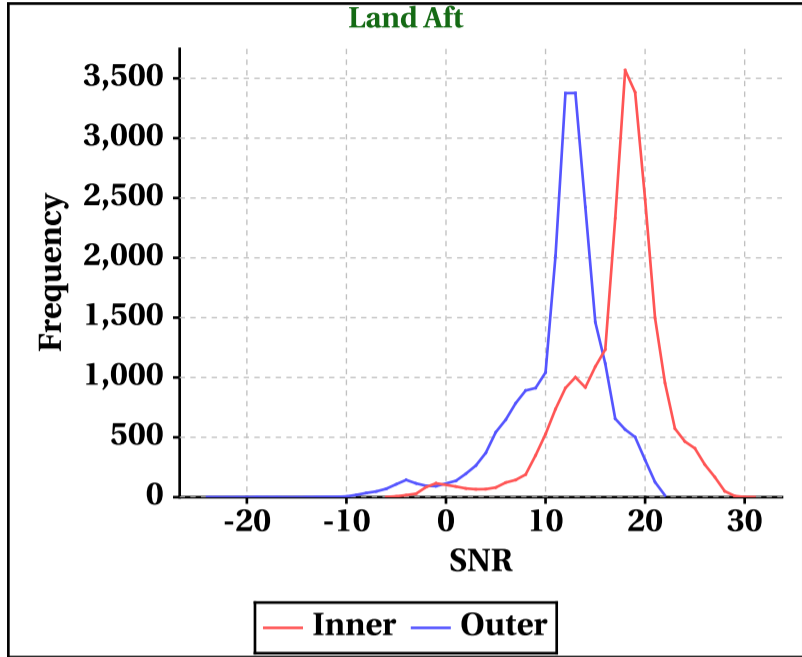


## Orbit-wise behaviour of SNR

Inner Beam (HH)

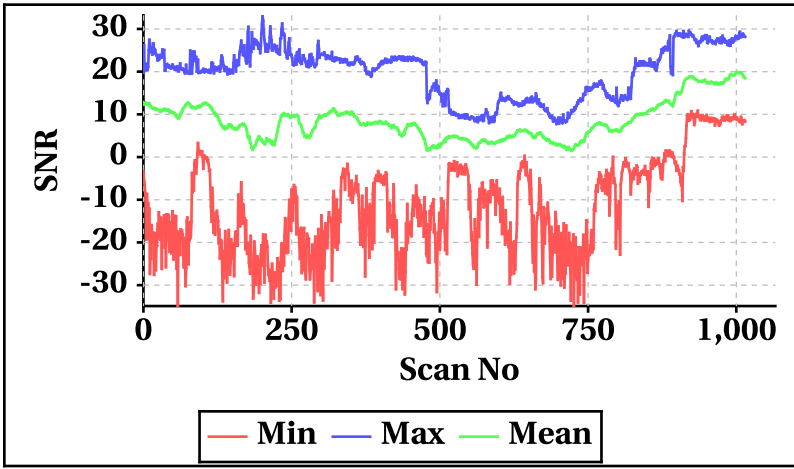


Outer Beam(VV)

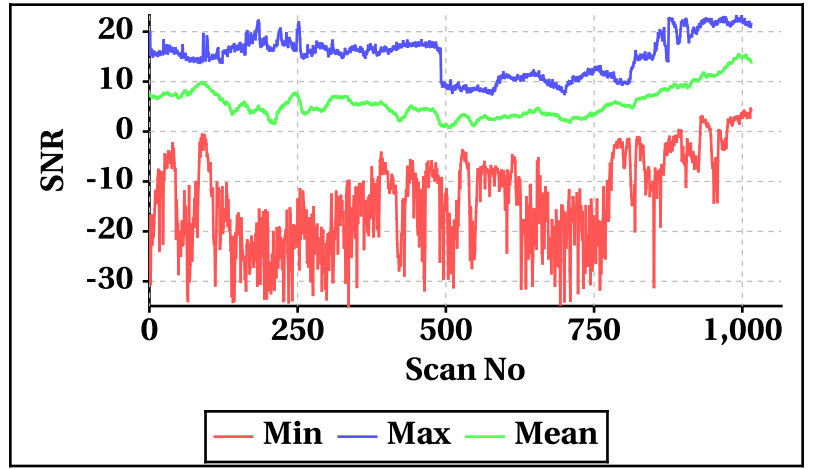


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

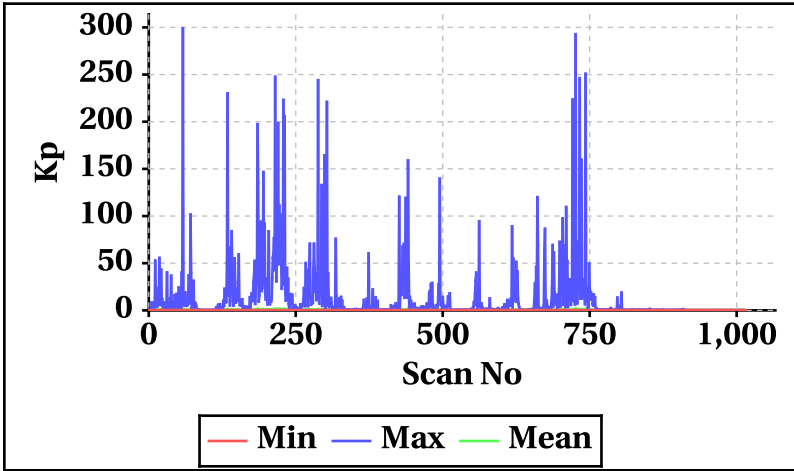


Outer Beam(VV)

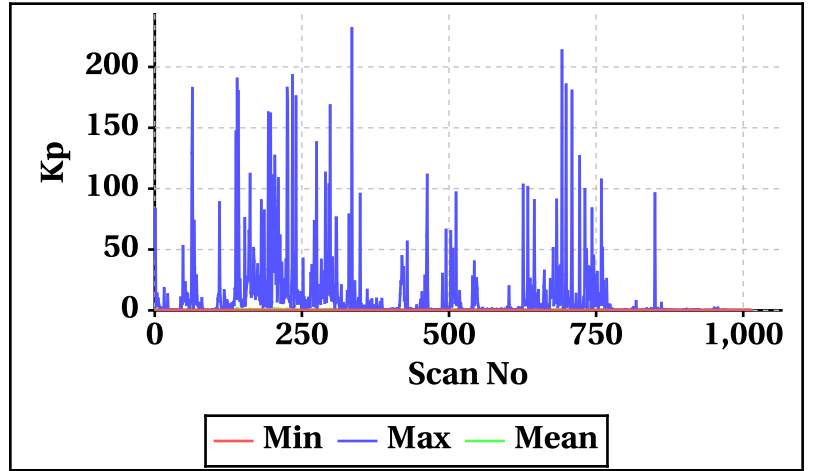


Inner Beam(HH)

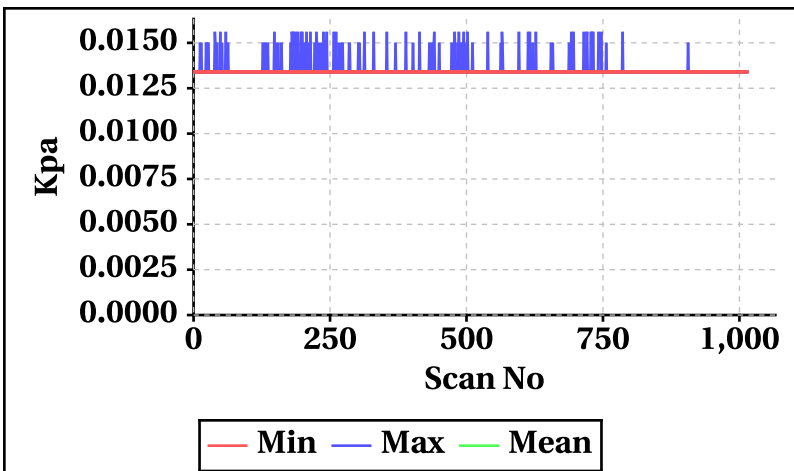


Outer Beam(VV)

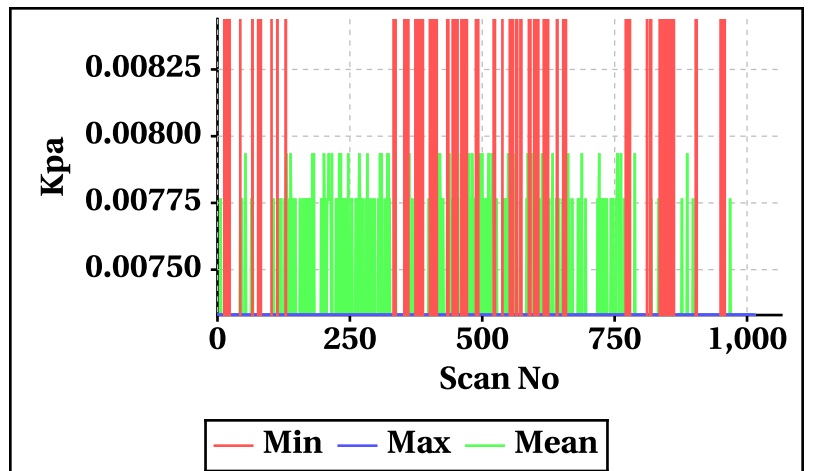


Inner Beam(HH)

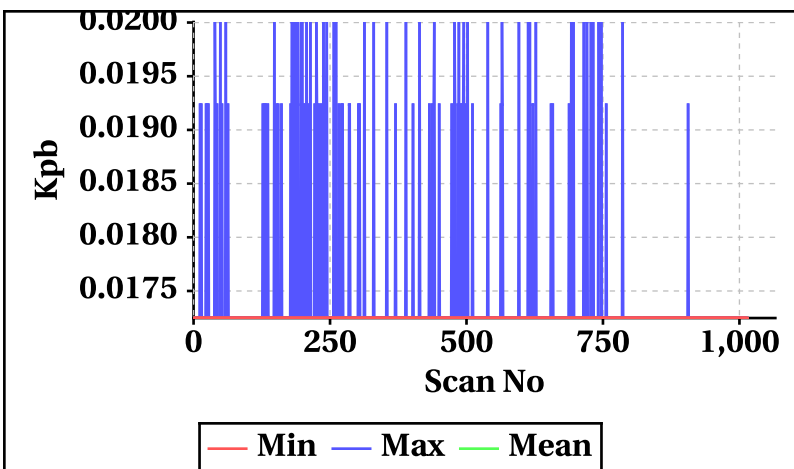


Outer Beam(VV)

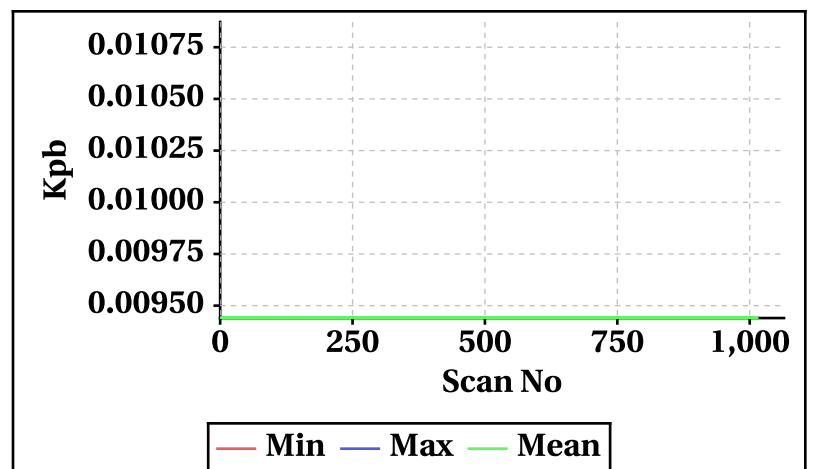

Inner Beam(HH)

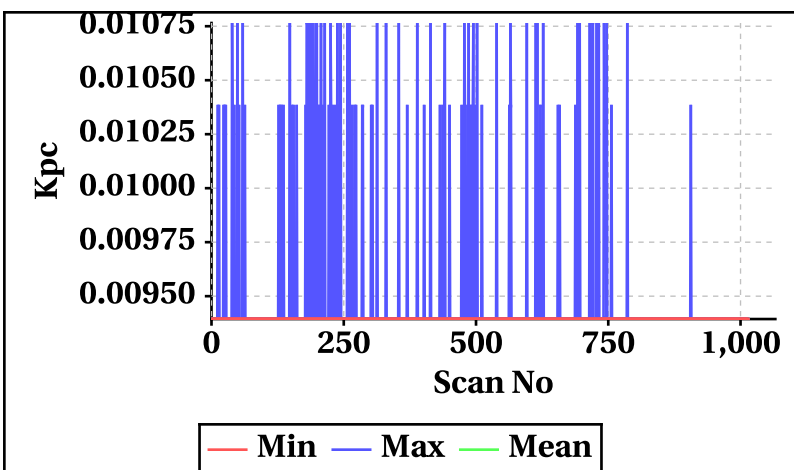


Outer Beam(VV)

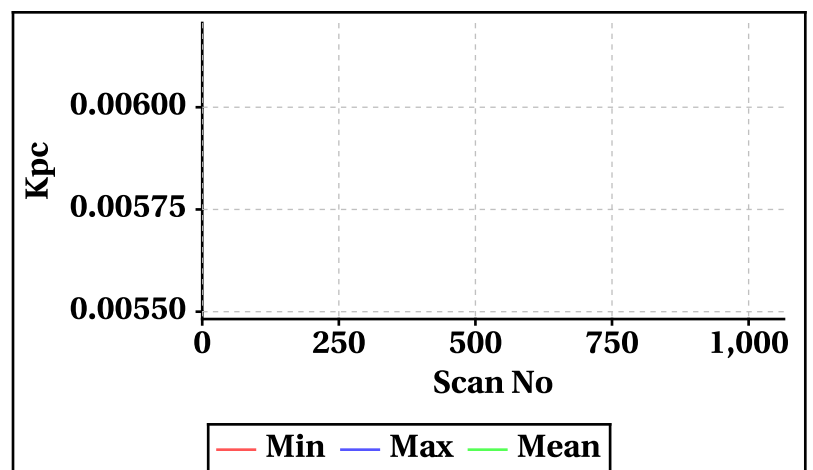


Orbit-wise behaviour of Incidence, Azimuth, Range, X-Factor


Inner Beam (HH)

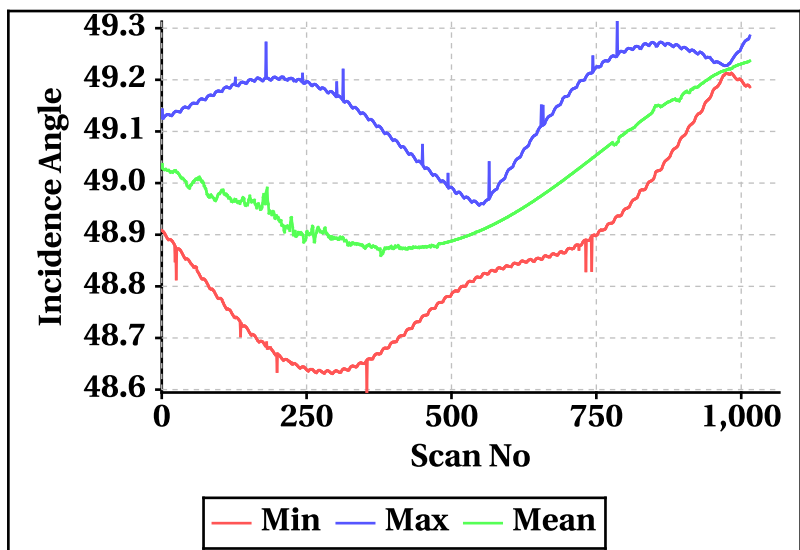


Outer Beam(VV)

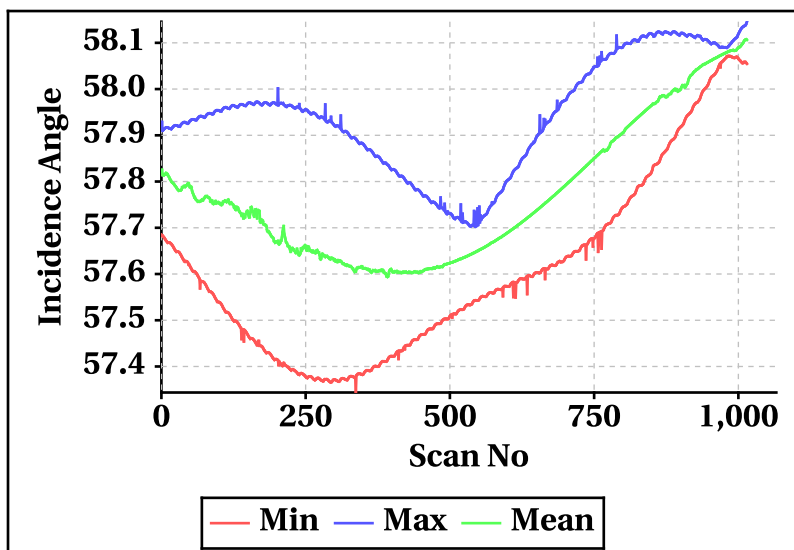


Inner Beam (HH)

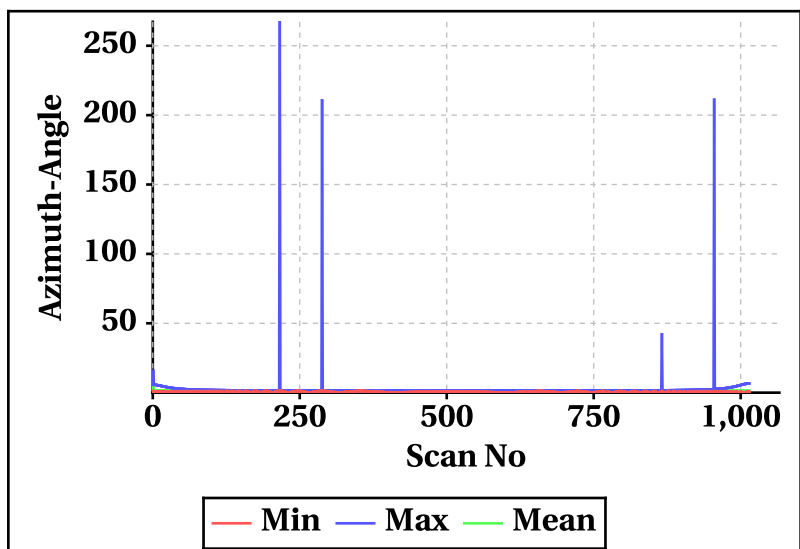


Outer Beam(VV)

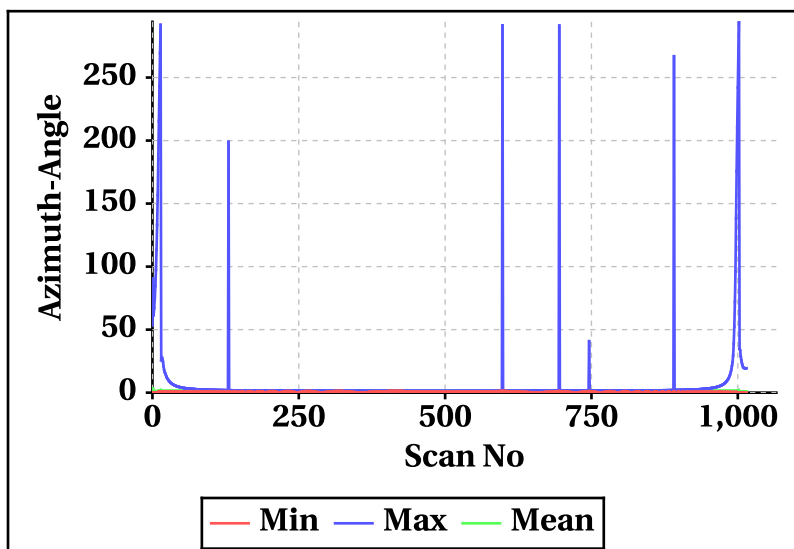


Inner Beam (HH)

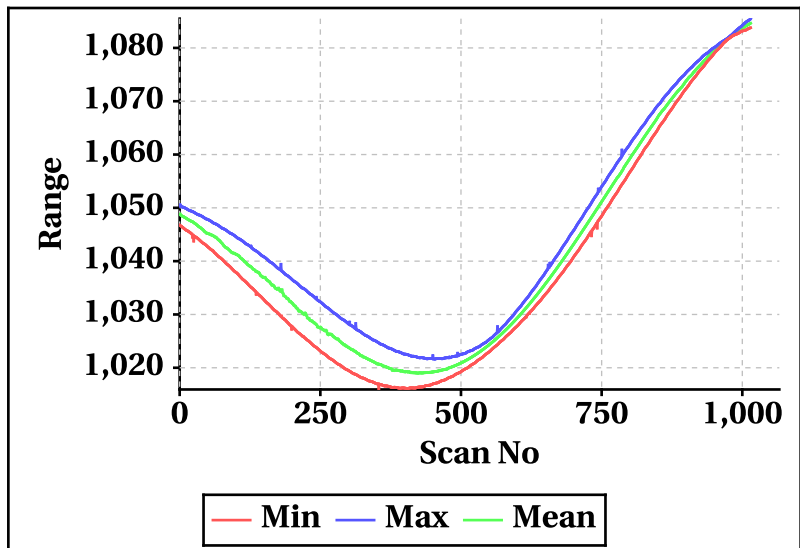


Outer Beam(VV)

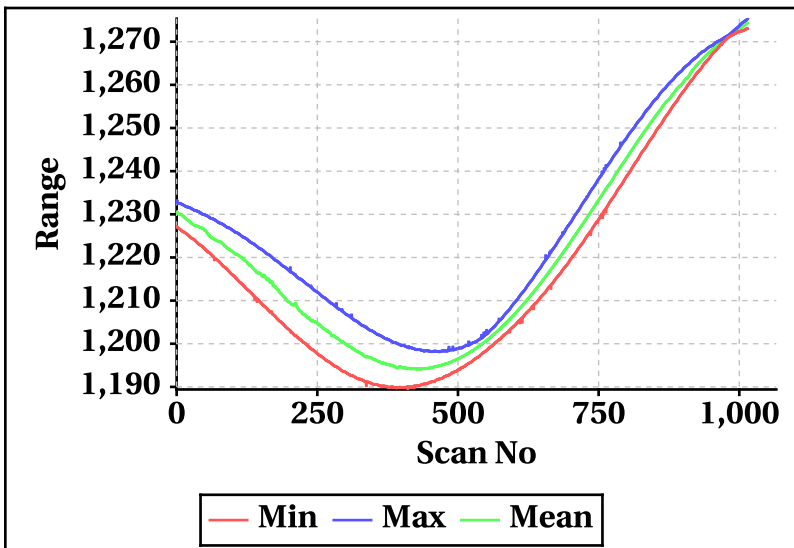

Inner Beam (HH)

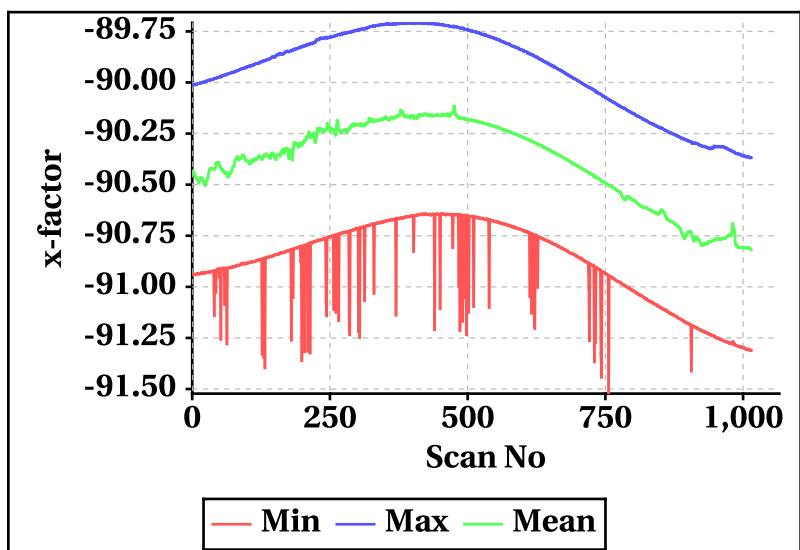

Outer Beam(VV)

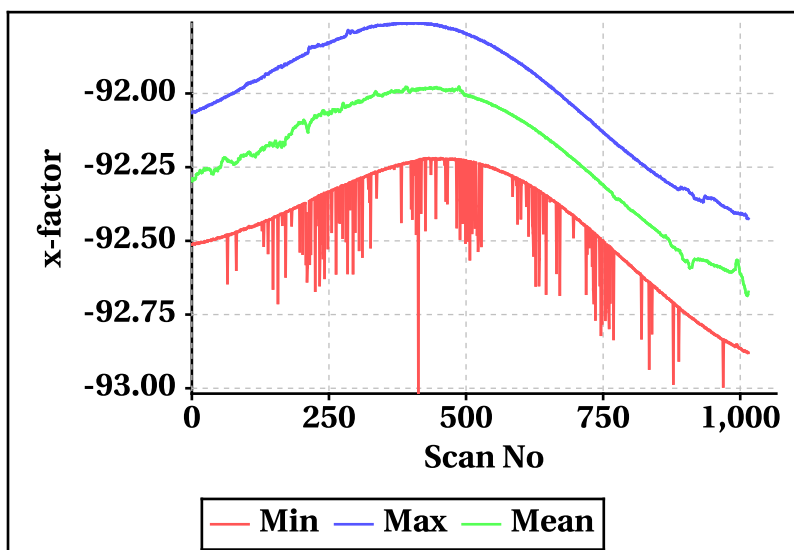




# Doppler Frequency Variation


**Doppler Frequency(KHz) variation statistics Over the half Orbit**

	Inner Beam (HH)	Outer Beam (VV)
<b>Min</b>	-465.14	-521.04
<b>Max</b>	463.16	519.30

**Footprint wise Doppler frequency variation Inner Beam (HH)**

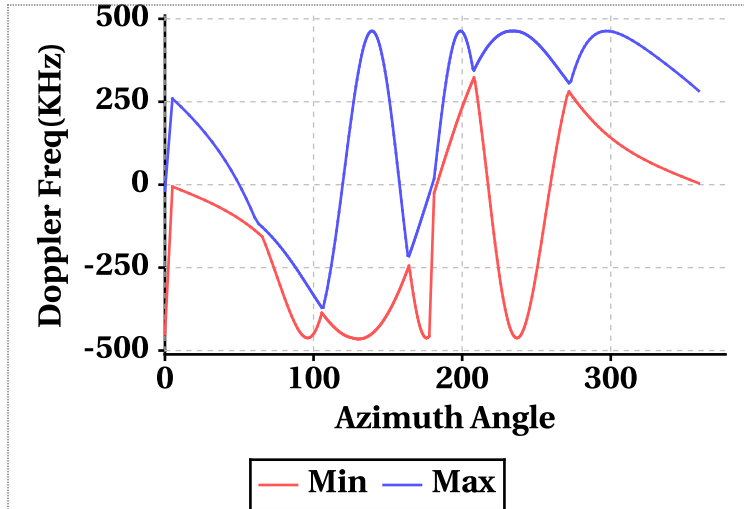


**Footprint wise Doppler frequency variation Outer Beam (VV)**

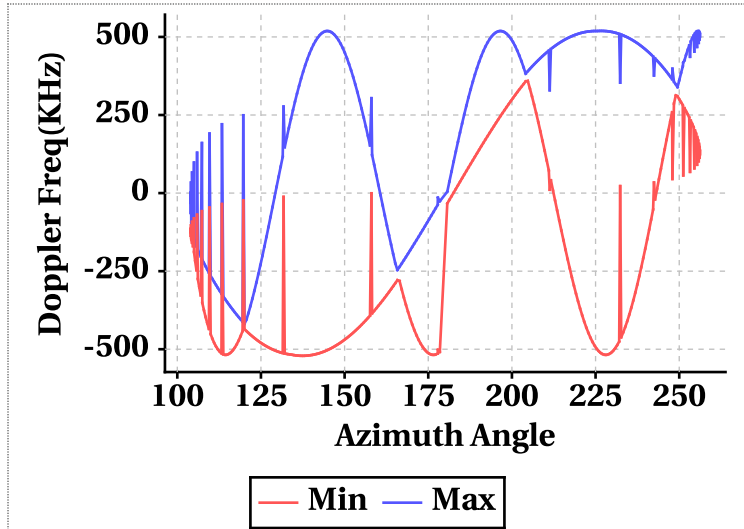


**Doppler Frequency(KHz) variation**

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	-24.78	18.56	-13.08	-33.16	4.62	-20.14
Doppler_70	-430.68	463.00	460.28	-476.72	518.62	515.66
Doppler_140	14.60	305.10	35.21	10.78	329.36	33.79
Doppler_210	-462.08	224.26	-461.12	-518.28	265.32	-517.08
Doppler_280	-450.96	-18.16	-39.95	-501.74	-14.62	-38.72

**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)**

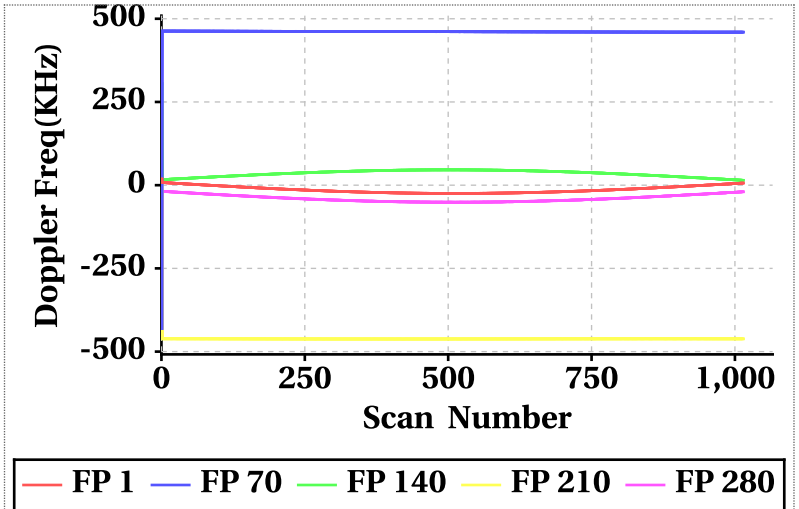


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)**

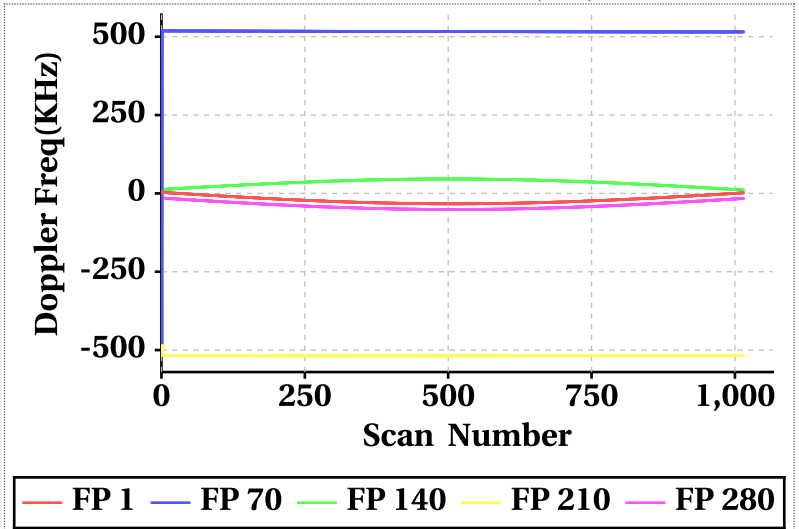


# Latitude Vs Doppler Frequency

**Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]**

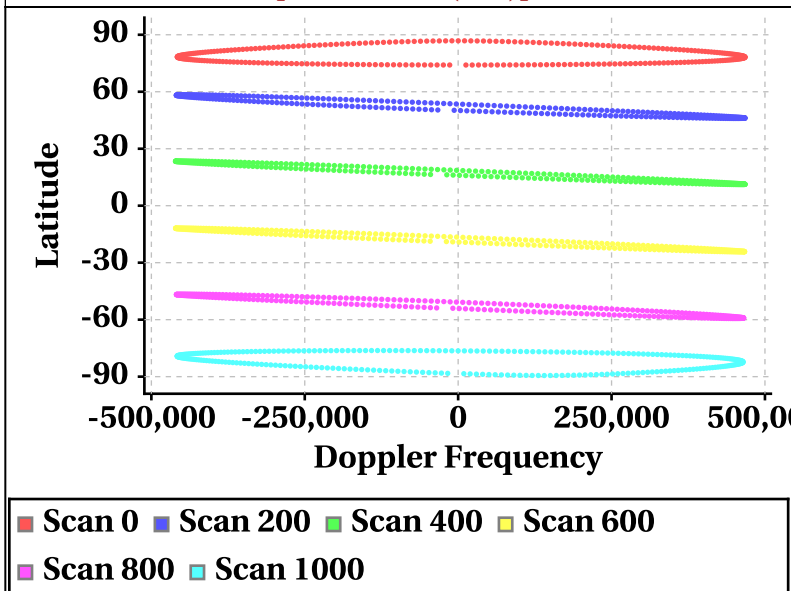


**Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]**

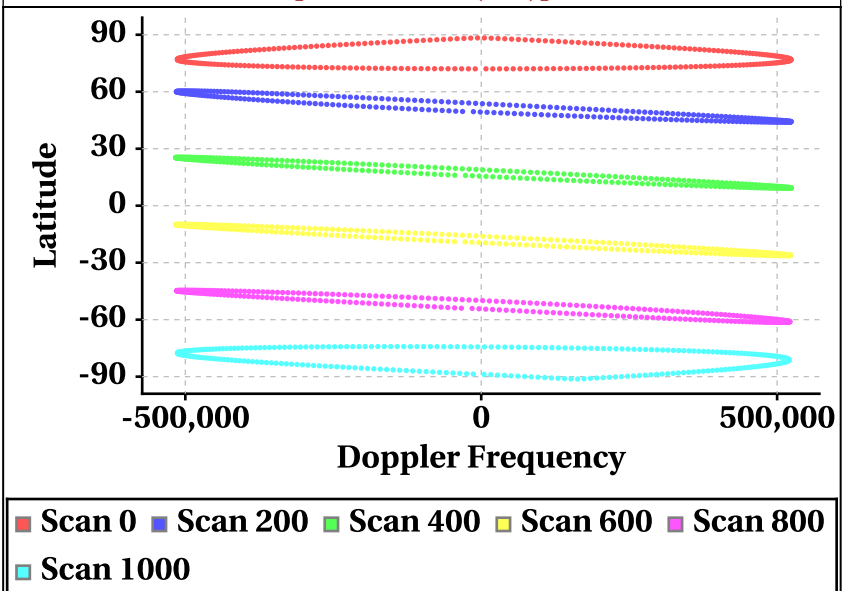

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

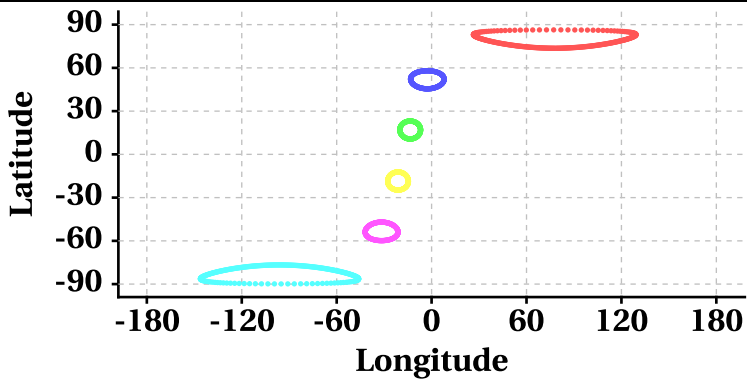

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Scan Trace [Outer Beam (VV)]

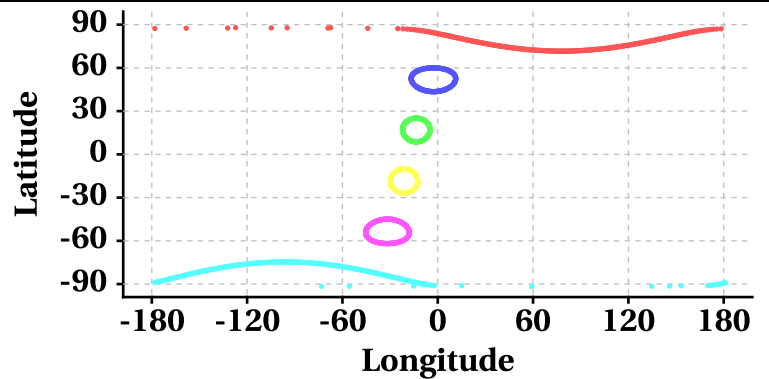

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

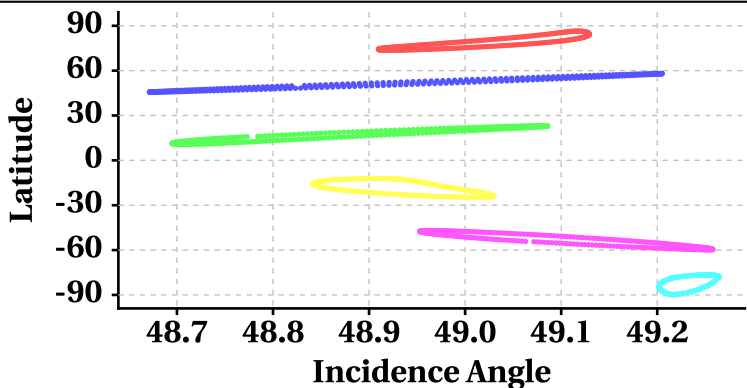

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

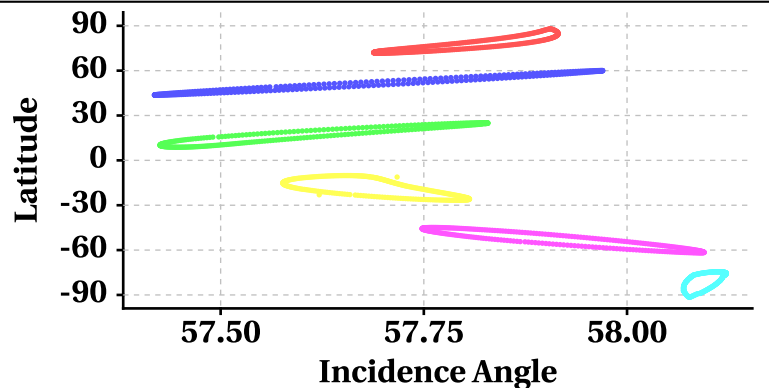

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

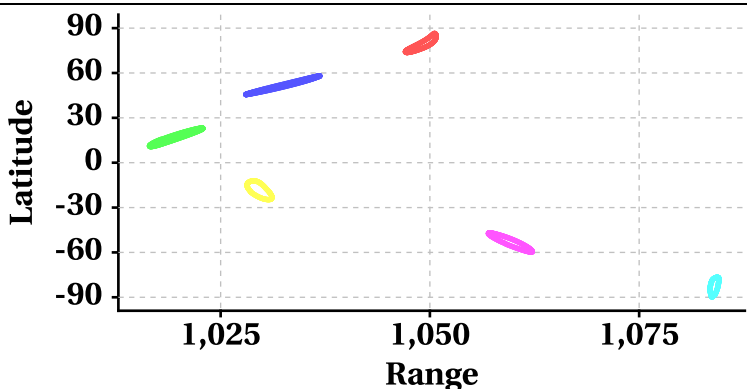

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

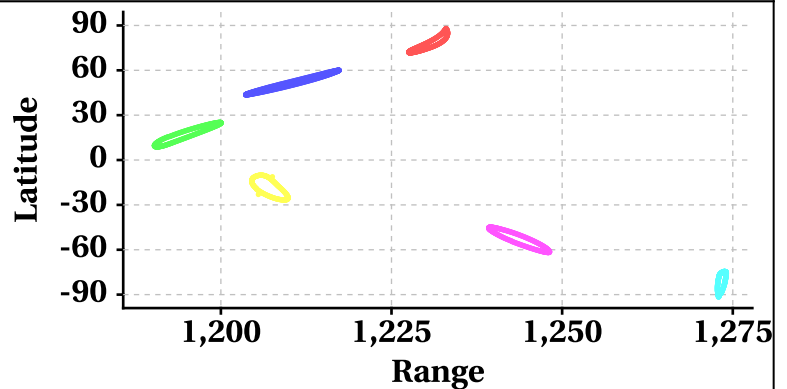

Scan 0 Scan 200 Scan 400 Scan 600  
Scan 800 Scan 1000



# Variation in Orbit and Attitude Parameters

