


# SCATSAT-1 Scatterometer Level-1B Data Quality Evaluation Report

## Table of Contents


- Half-Orbit Coverage using BT & Sigma-0
- Invariant Site Sigma-0 Statistics (if Available)
- Half-Orbit Data Statistics
- Half Orbit wise - Dynamic Parameter (Sigma-0, Kp, SNR) Behaviour
- Dynamic Range (Data Histogram)
- Half Orbit Wise Behaviour - Static Parameters
- Doppler Variation (Across/Along Track for HH/VV Beam)
- LIB Parameter as a function of Latitude
- Half Orbit OAT Behaviour

<b>Satellite Id</b>	ScatSat-1	<b>Start Orbit</b>	730	<b>Total Scans</b>	1018
<b>Sensor Name</b>	Scatterometer	<b>End Orbit</b>	731	<b>No of Inner FootPrints</b>	281
<b>Processor Version</b>	1.0	<b>Rev. Number</b>	00730_00731	<b>No Of Outer FootPrints</b>	282
<b>Half Orbit Direction</b>	SN	<b>Data Production Date</b>	15-11-2016	<b>No. Of Inner Slices</b>	9
<b>Equator Crossing Date</b>	15-11-2016	<b>Equator Crossing Time</b>	11:55:35.000	<b>No Of Outer Slices</b>	15


## Brightness Temperature(k) Footprint trace

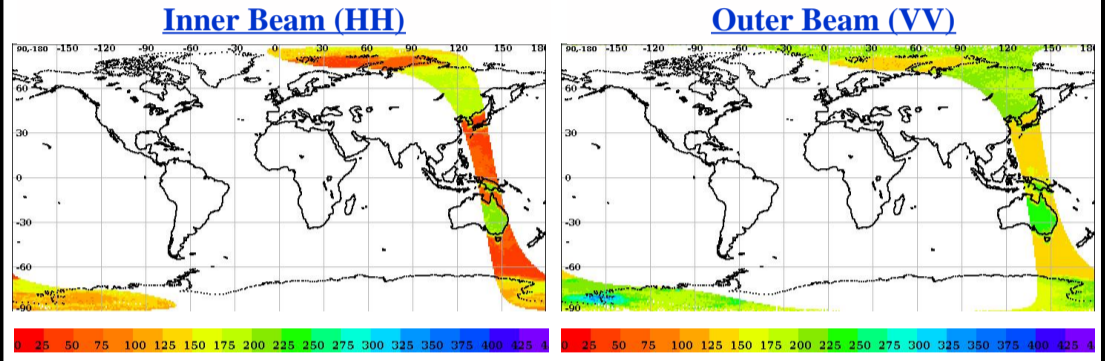

## Image Snapshot for Inner & Outer Beam

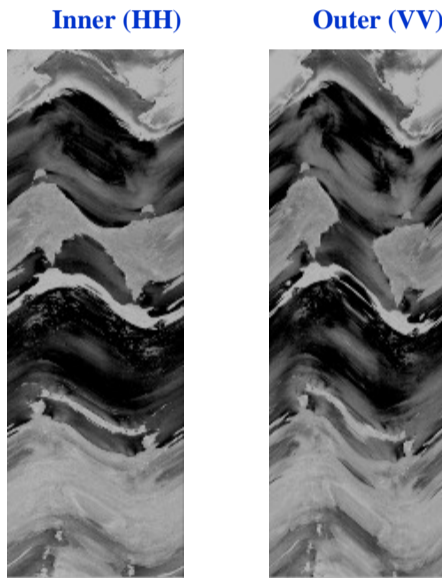

## Sigma0(dB) Footprint trace

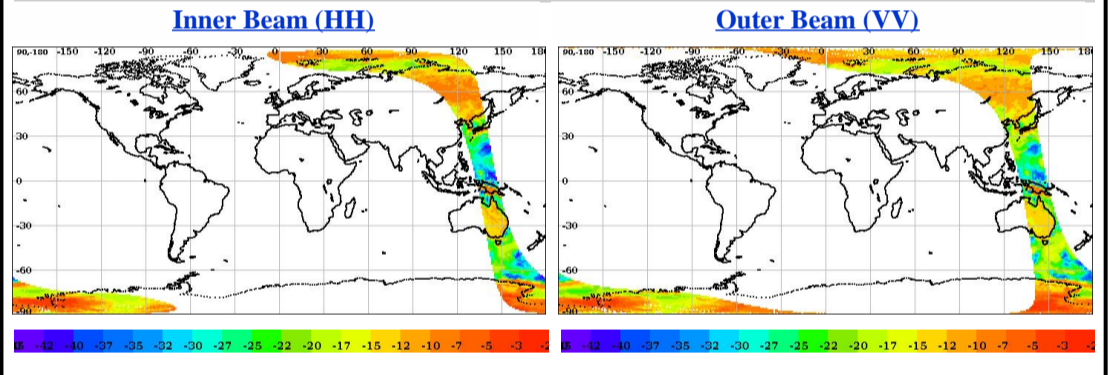


## Invalid and Poor Sigma-0 Quality Flag Statistics for Inner/Outer Slices\*

Sigma-0 Flags	Inner Beam	Outer Beam
Invalid Sigma0(%)	0.10	0.10
Data Not Available From Payload (%)	100.0	100.0
Slice not within sample array limits (%)	0.00	0.00
C(S+N) - C(N) < 0.1 (%)	0.00	0.00
Poor Sigma0(%)	0.01	0.01
Noise samples for blending Saturated	0.0	0.0
Count samp. for interpol. saturated (%)	0.00	0.00
Sigma0 < lower bound (-96dB) (%)	0.0	0.0
Sigma0 > upper bound (0 dB) (%)	0.00	0.00
SNR < -65 dB (%)	100.0	100.0


\*DP Format Document

## Sigma-0 Quality Flag Statistics for Inner/Outer Footprints

### Inner Beam (HH)

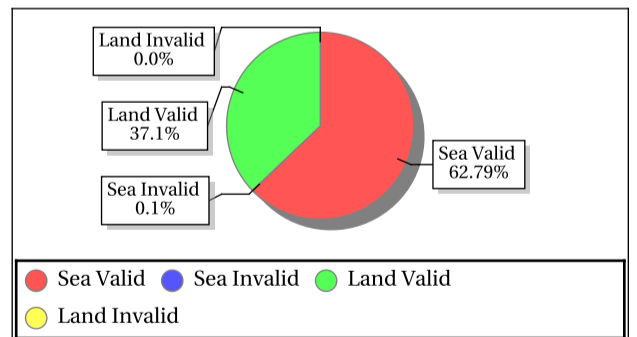

### Outer Beam (VV)

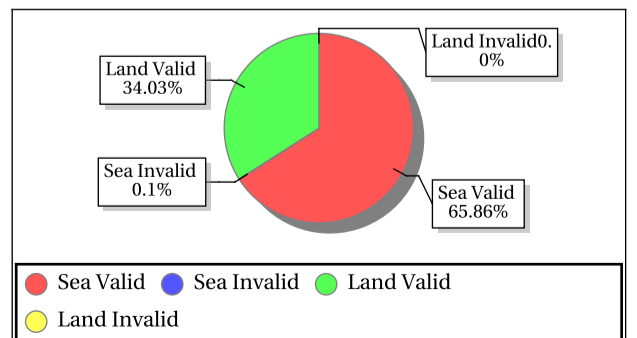

## Overall statistics for the Static Parameters (Footprint-wise)

Inner Beam (HH)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.10	239.40	0.29	2.478	0.10	212.31	0.26	2.335	0.10	0.11	0.10	0.000	0.10	0.11	0.10	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.02	0.01	0.000	0.01	0.02	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>SNR</b>	-34.52	25.78	6.34	1.584	-34.00	26.69	7.26	2.707	7.61	32.15	19.75	20.831	8.65	31.41	20.41	26.231

Outer Beam (VV)																
	Sea Aft				Sea Fore				Land Aft				Land fore			
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)
<b>Kp</b>	0.08	201.12	0.28	2.492	0.08	206.40	0.25	2.284	0.08	0.17	0.08	0.000	0.08	0.12	0.08	0.000
<b>Kpa</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpb</b>	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000	0.01	0.01	0.01	0.000
<b>Kpc</b>	0.00	0.01	0.00	0.000	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000	0.00	0.00	0.00	0.000
<b>SNR</b>	-34.78	19.38	4.00	0.000	-34.90	20.66	4.28	0.000	-1.66	24.91	14.34	2.461	1.22	25.41	14.73	2.433

Parameter Specifications					
Parameter	Kp	Kpa	Kpb	Kpc	SNR
Min	0.00	0.00	0.00	0.00	-65.00
Max	1.00	1.00	1.00	1.00	22.00

- Normal
- Deviations
- Alarming
- High Errors

## Overall statistics for static parameter (Footprint-wise)

	Inner Beam (VV)				Outer Beam (VV)				Parameter Specifications		
	Min	Max	Mean	Bad Occ. (%)	Min	Max	Mean	Bad Occ. (%)	Parameter	Min	Max
<b>Incidence Angle (deg)</b>	48.93	49.40	49.10	0.000	57.69	58.26	58.05	0.000	Inci.(Inner)	47.10	49.90
<b>Azimuth Diff. (deg)</b>	0.0026	1.29	1.11	0.156	0.0026	1.29	1.13	0.172	Inci.(Outer)	57.30	58.90
<b>Range(Km)</b>	1034.46	1096.78	1057.37	2.477	1211.82	1288.95	1238.98	12.759	Azimuth Diff.	0.60	2.00
<b>X Factor(dbm)</b>	-91.42	-90.08	-90.29	0.000	-93.10	-92.02	-92.23	0.000	Range(Inner)	1025.00	1095.70
<b>Across Distance (Km)</b>	99999.99	-99999.99	0.00	0.000	99999.99	-99999.99	0.00	0.000	Range(Outer)	1210.00	1280.00
<b>Along Distance (Km)</b>	18.87	20.41	19.72	0.000	18.55	20.43	19.63	0.000	X-Factor	-100.00	-80.00
									Ac.Distance(Inner)	15.00	20.00
									Ac.Distance(Outer)	15.00	22.00
									Al.Distance(Inner)	15.00	30.00
									Al.Distance(Outer)	10.00	30.00


- Normal
- Deviations
- Alarming
- High Errors



## Sigma0 Behaviour (Sigma0 Vs SNR)


Footprint-Land

Sigma0 Vs SNR (Land)

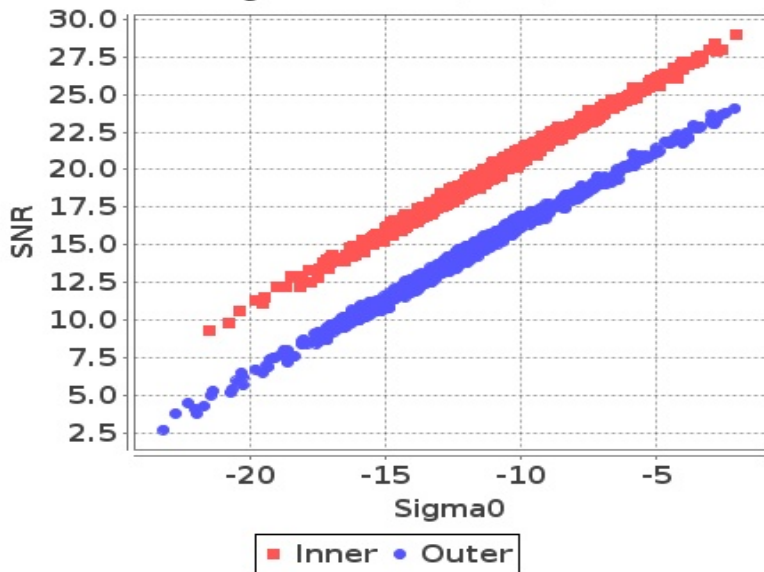


Footprint-Sea

Sigma0 Vs SNR (Sea)

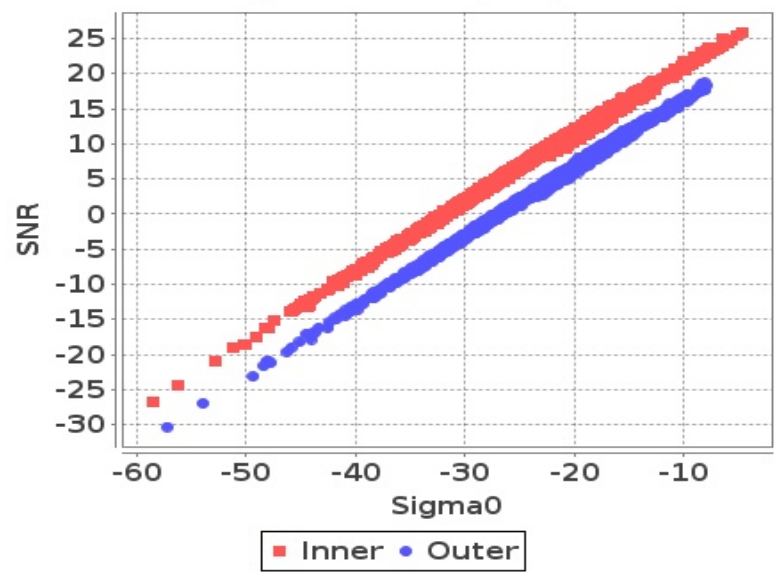


Slice-Land

Sigma0 Vs SNRatSlice (Land)

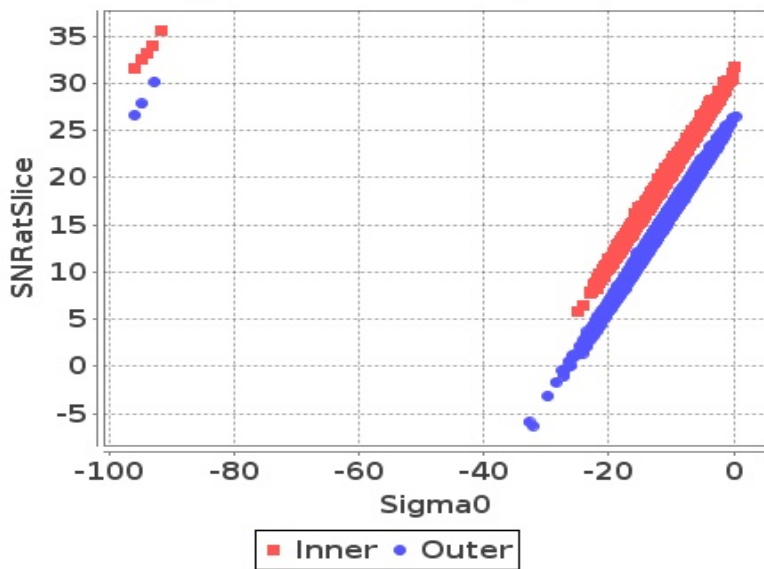

Slice-Sea


Sigma0 Vs SNRatSlice (Sea)

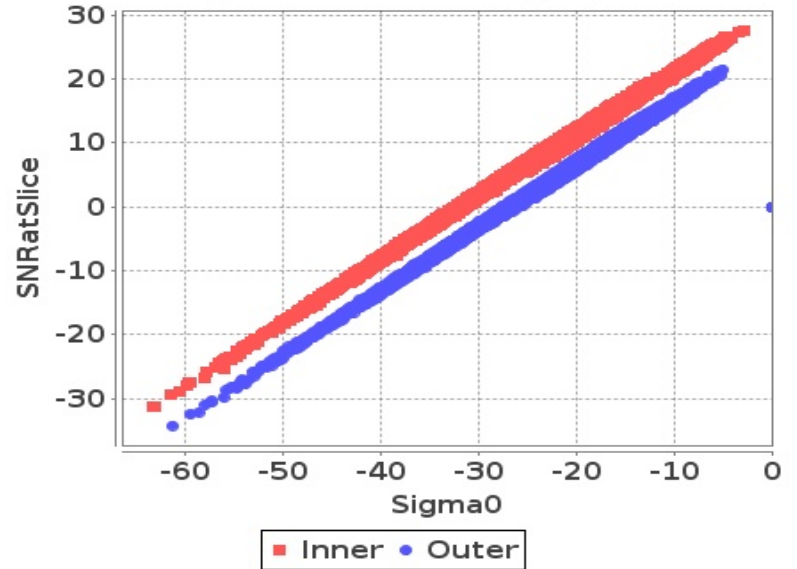

## Sigma0 Behaviour (Kp Vs SNR)


Slice

Kp Vs SNRatSlice (Land)

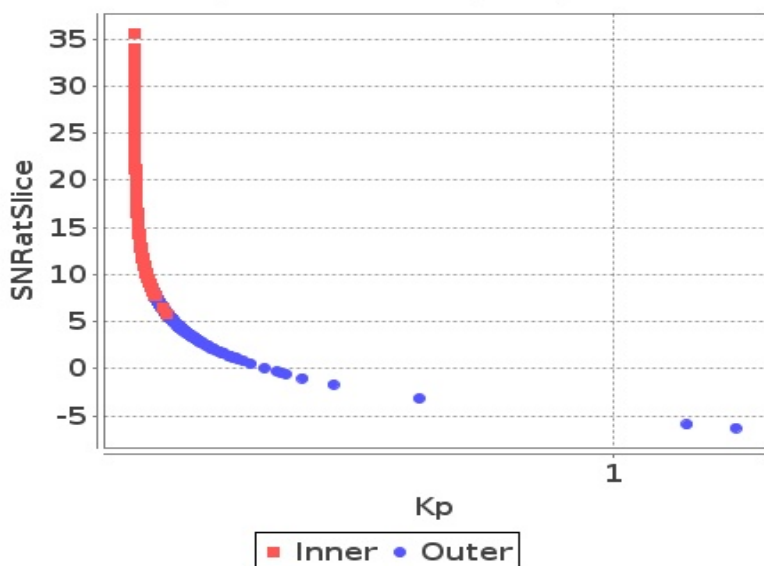


Slice

Kp Vs SNRatSlice (Sea)

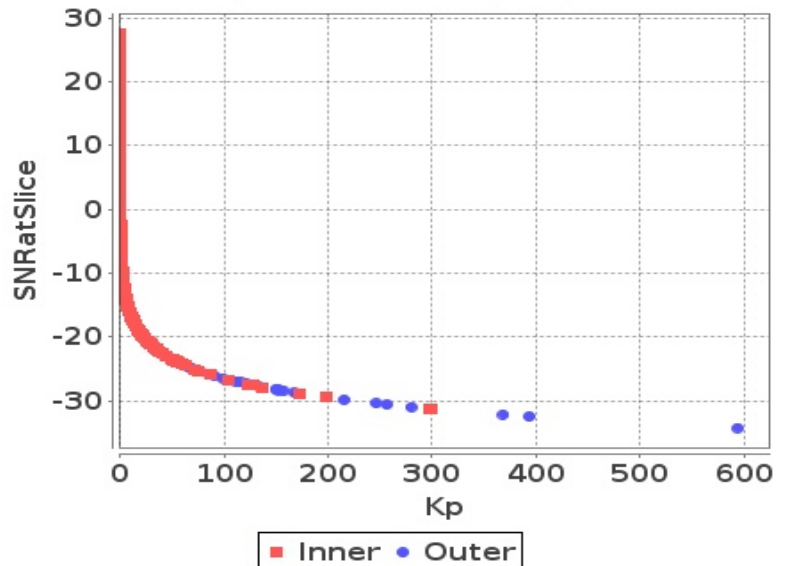


# Sigma0 Behaviour(Sigma0 Vs Kp)


## Footprint-Land

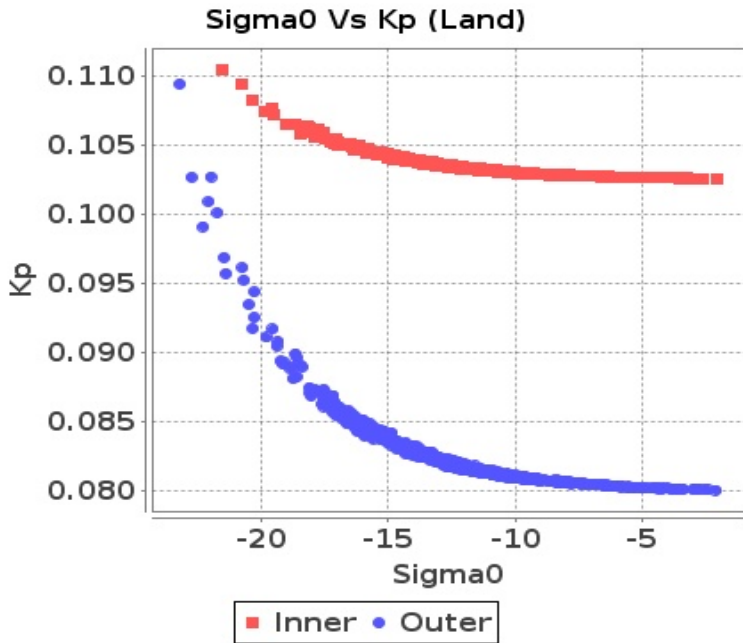


## Footprint-Sea

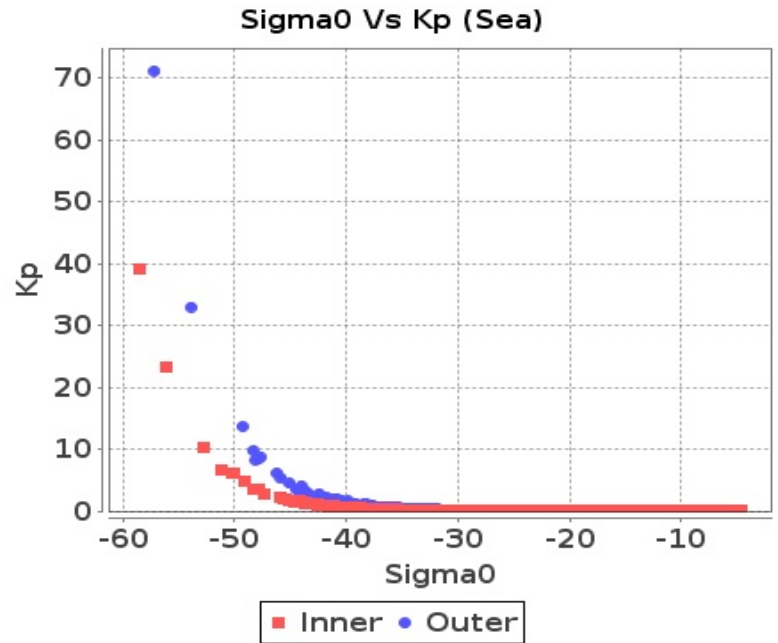

## Slice-Land

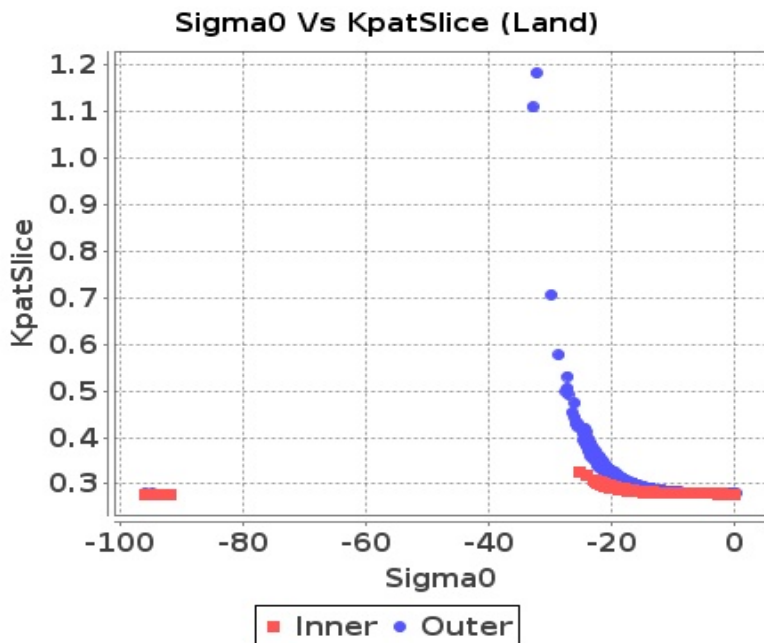

## Slice-Sea

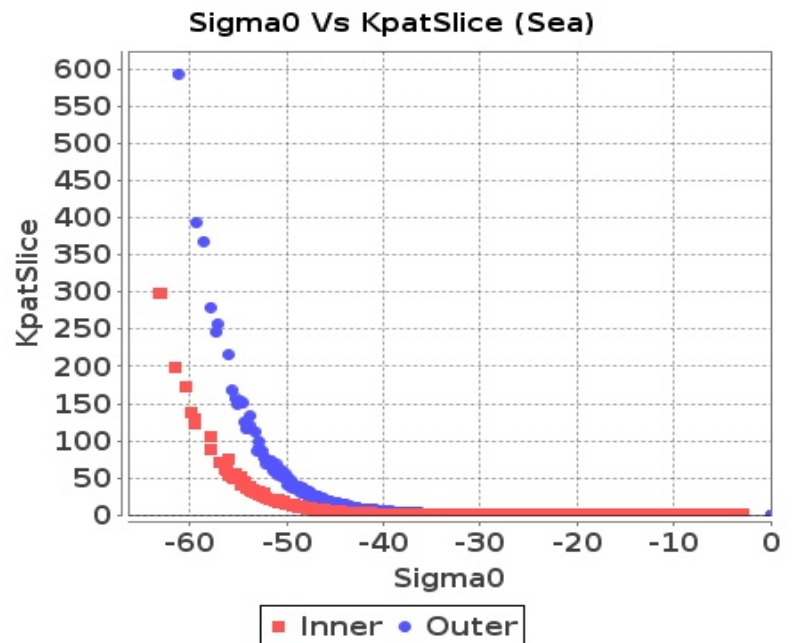







# Dynamic Range (Data Histograms)

## Sigma0(db)

Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-95	-21	-66	-65
Max	0	0	0	0





Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-28	-25	-61	-61
Max	0	0	0	0

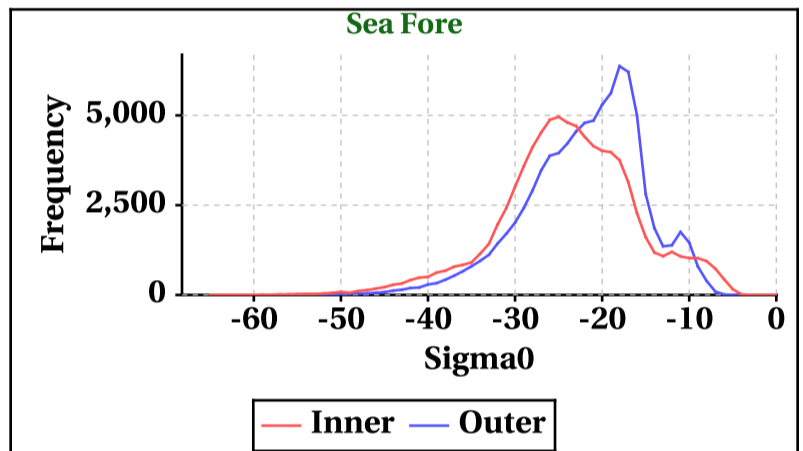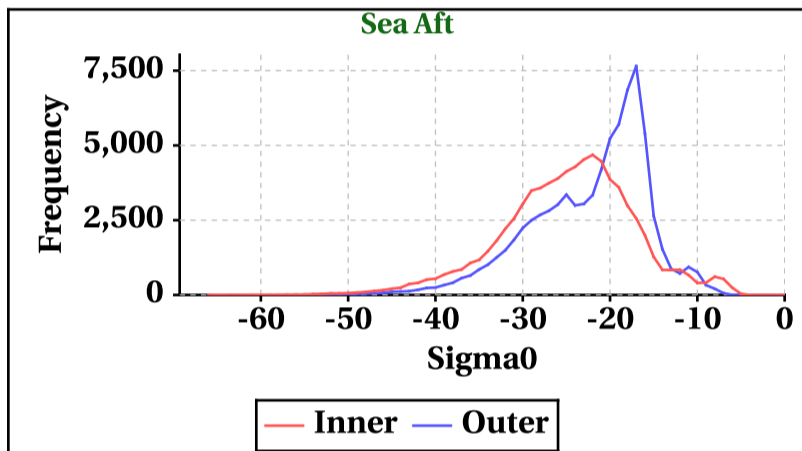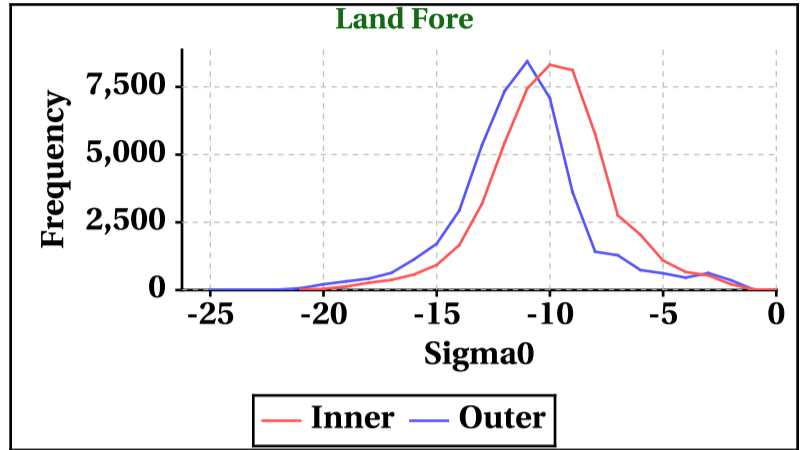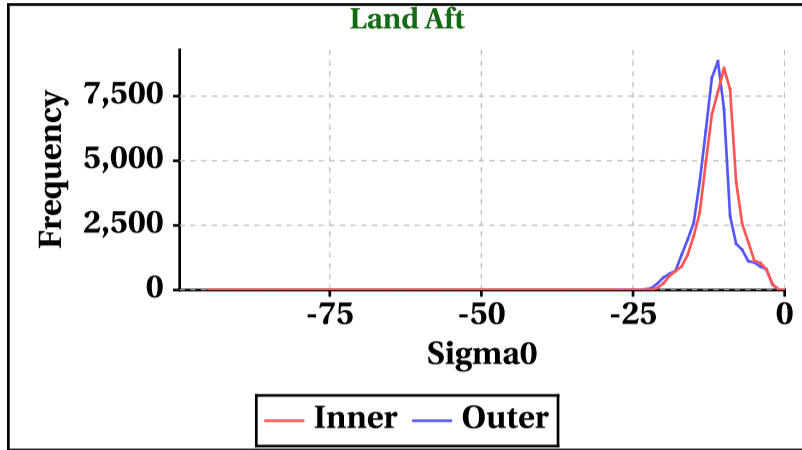

## Brightness Temperature(K)

Inner Beam(HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	276	281	654	654

Outer Beam(VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	0	0
Max	485	308	332	272

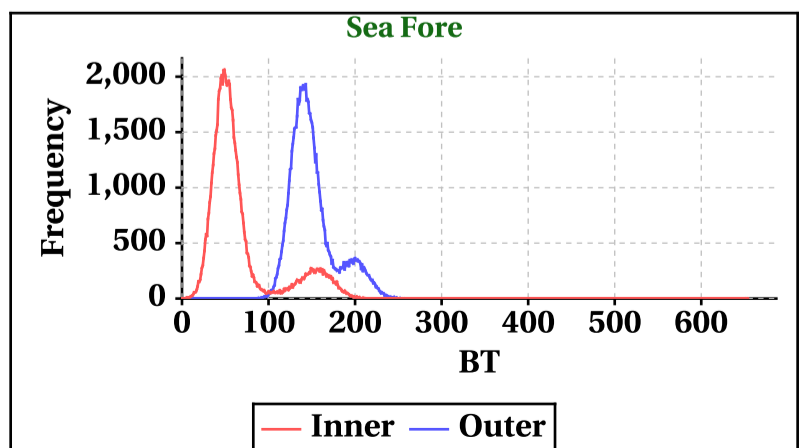
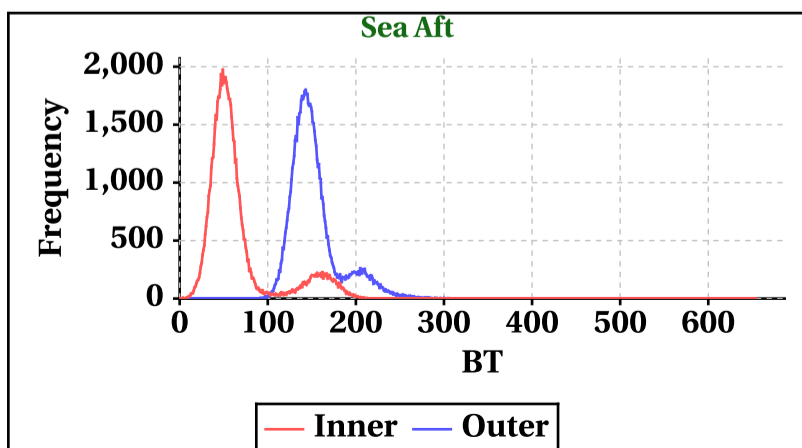
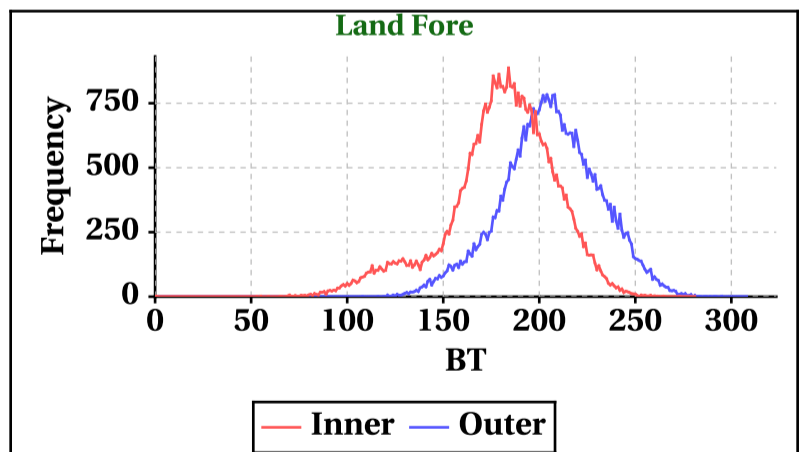
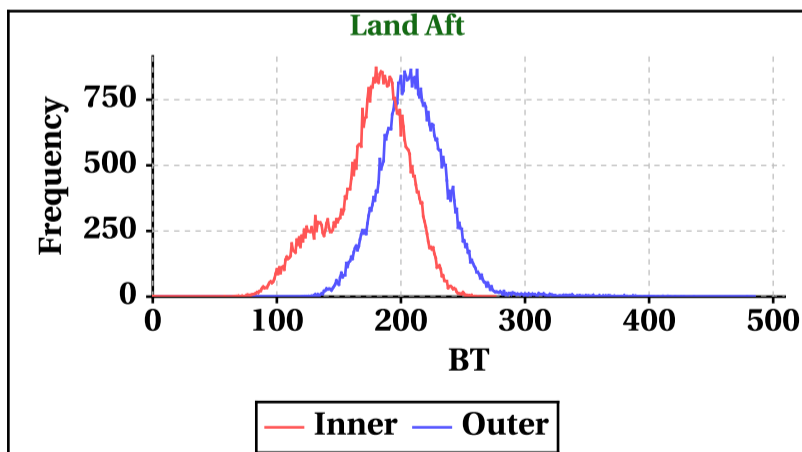


# Dynamic Range (Data Histograms)

## SNR(dBm)


Inner Beam (HH)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	0	0	-34	-34
Max	32	31	25	26

Outer Beam (VV)				
	Land Aft	Land Fore	Sea Aft	Sea Fore
Min	-1	0	-34	-34
Max	24	25	19	20

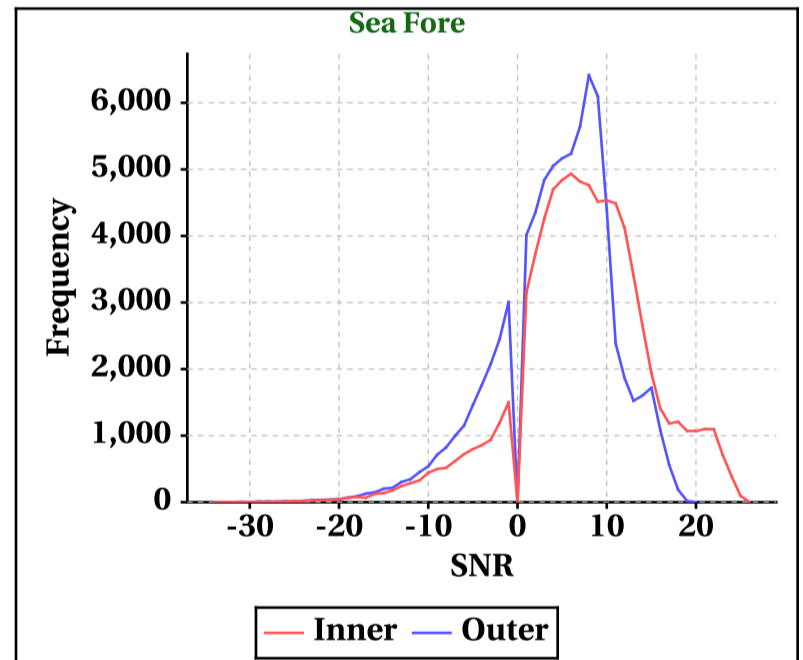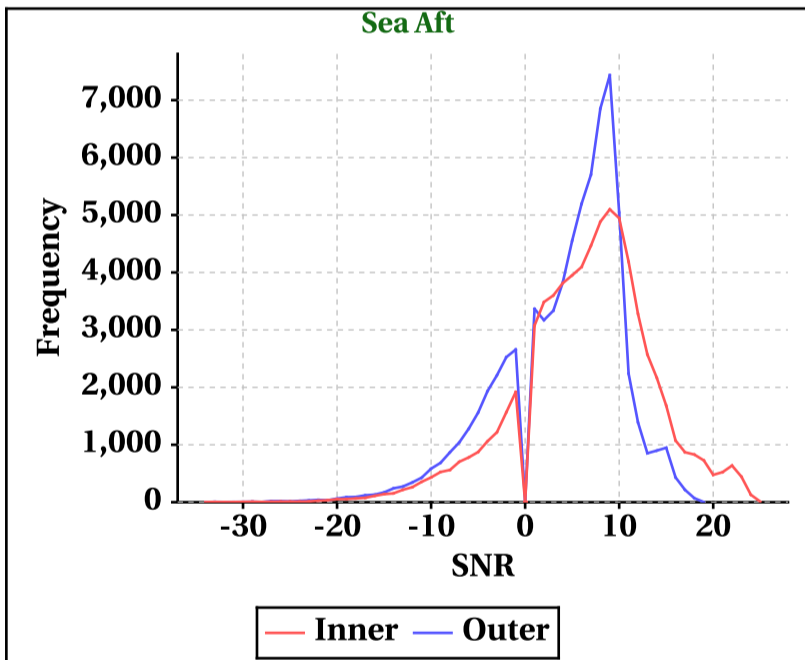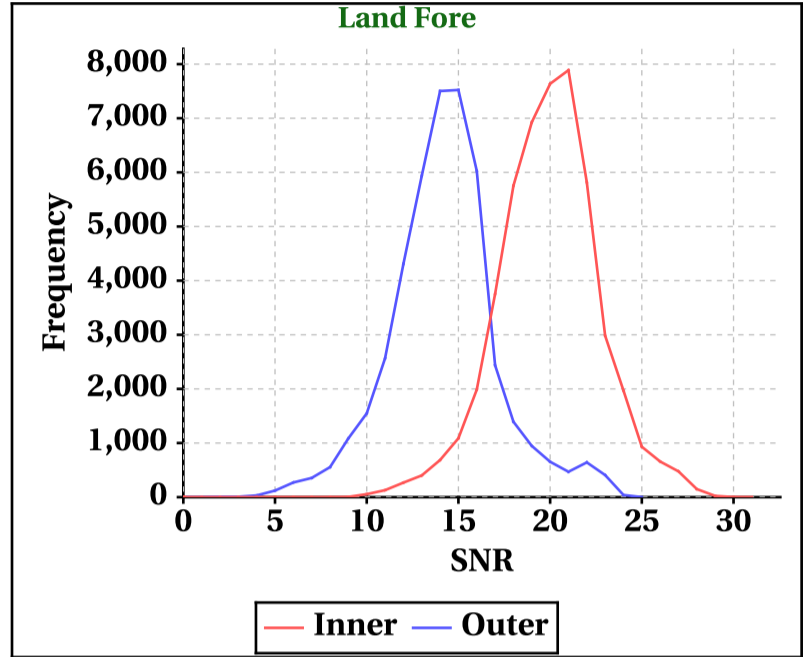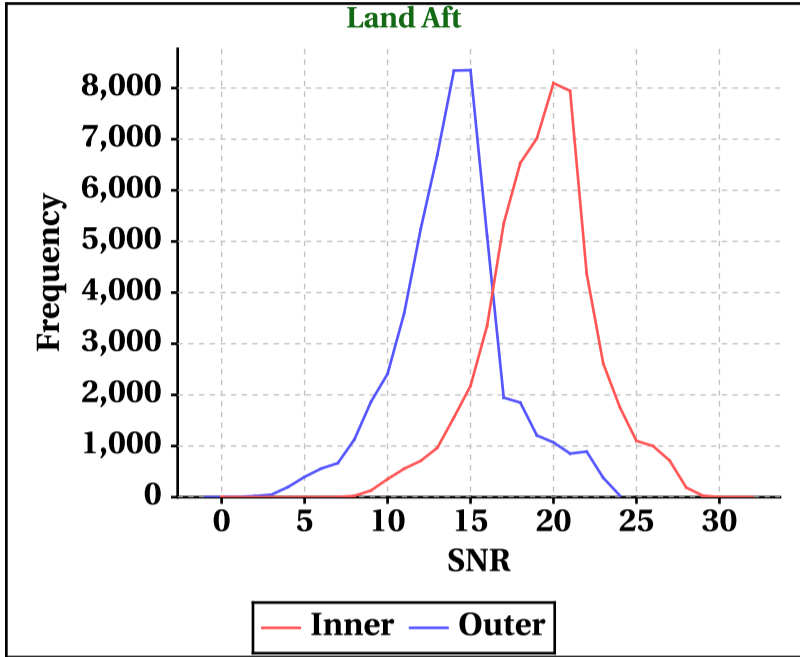


## Orbit-wise behaviour of SNR

Inner Beam (HH)

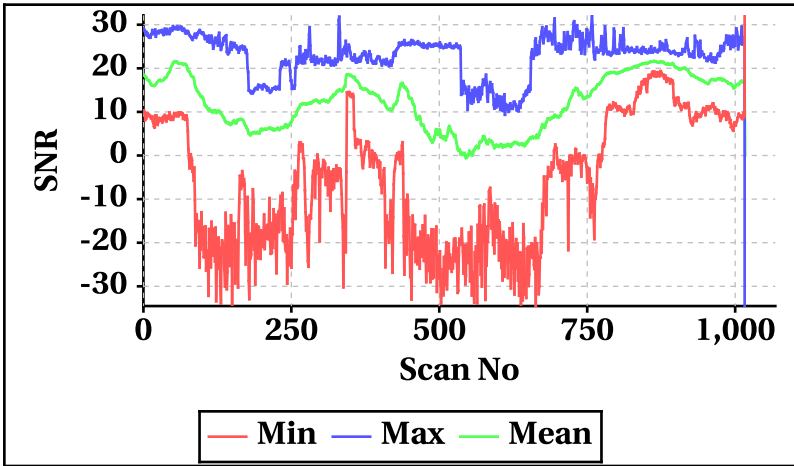


Outer Beam(VV)

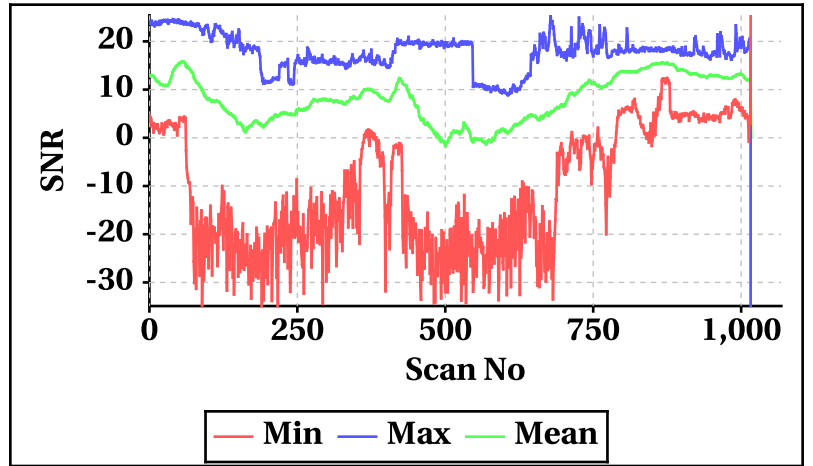


## Orbit-wise behaviour of Kp,Kpa,Kpb,Kpc


Inner Beam(HH)

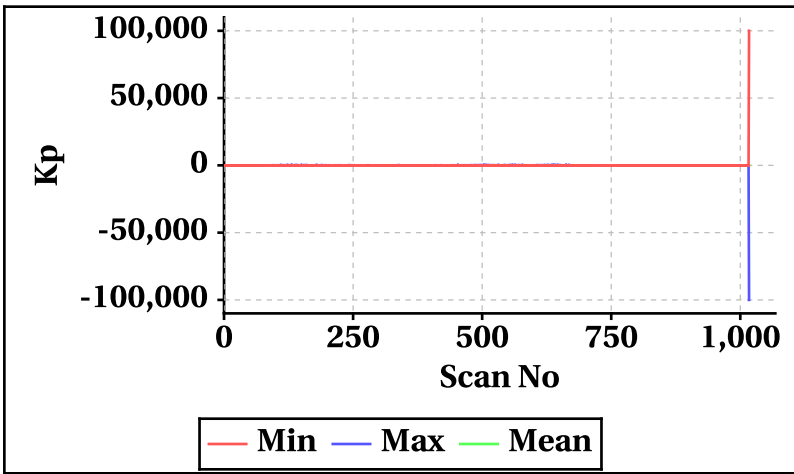


Outer Beam(VV)

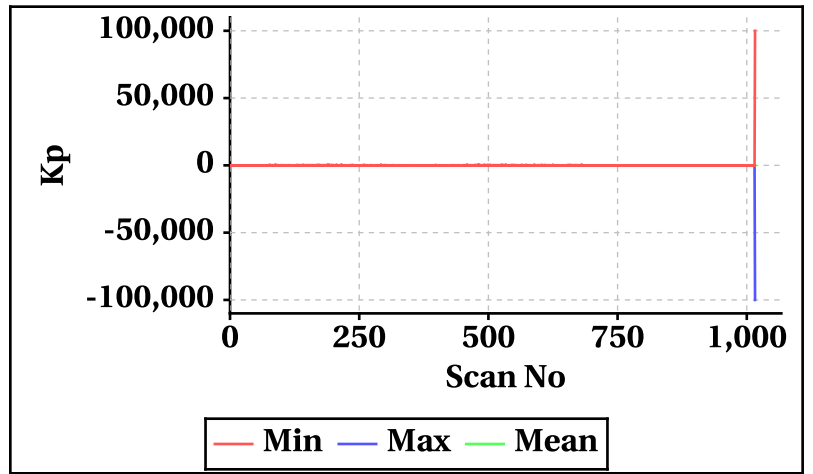


Inner Beam(HH)

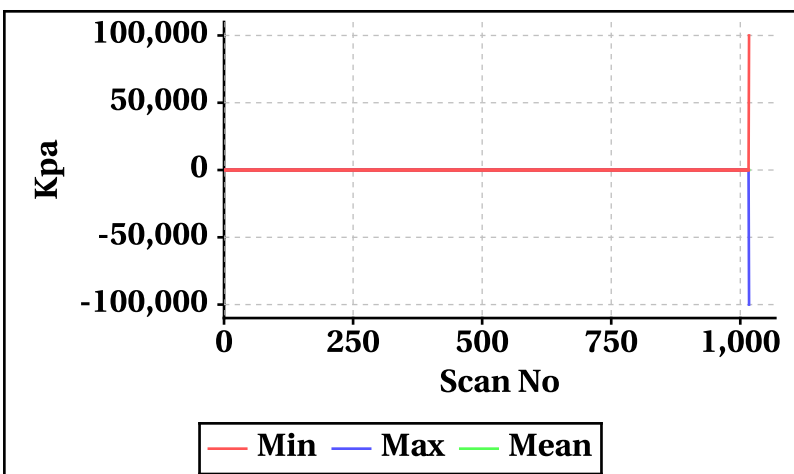


Outer Beam(VV)

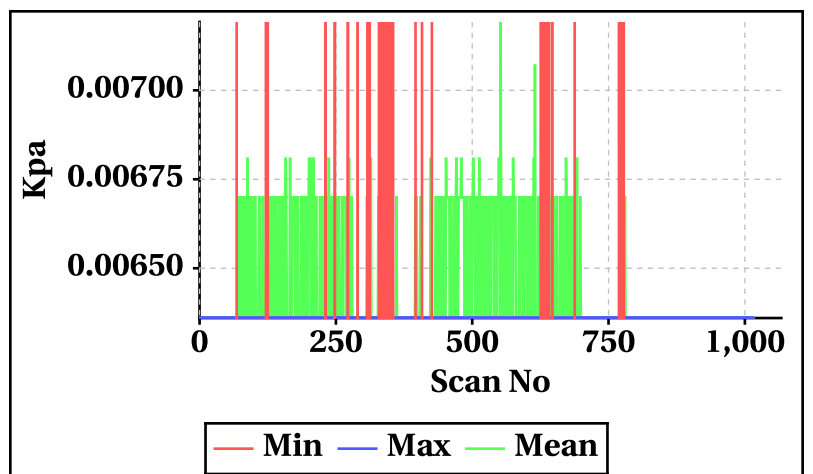


Inner Beam(HH)

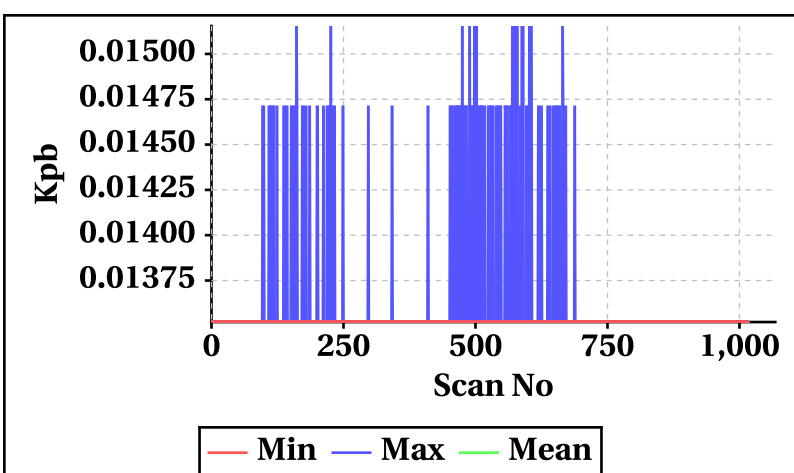


Outer Beam(VV)

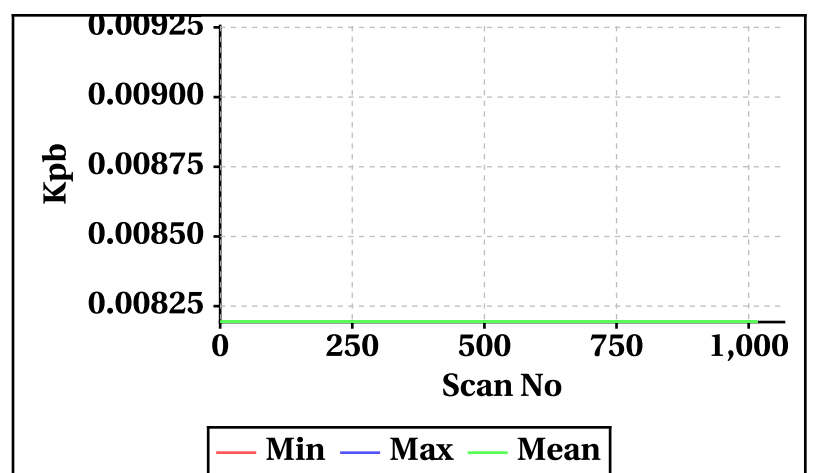

Inner Beam(HH)

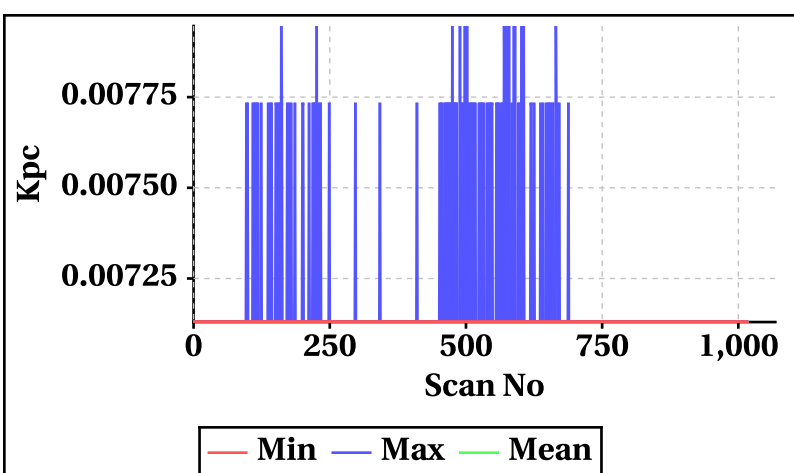


Outer Beam(VV)

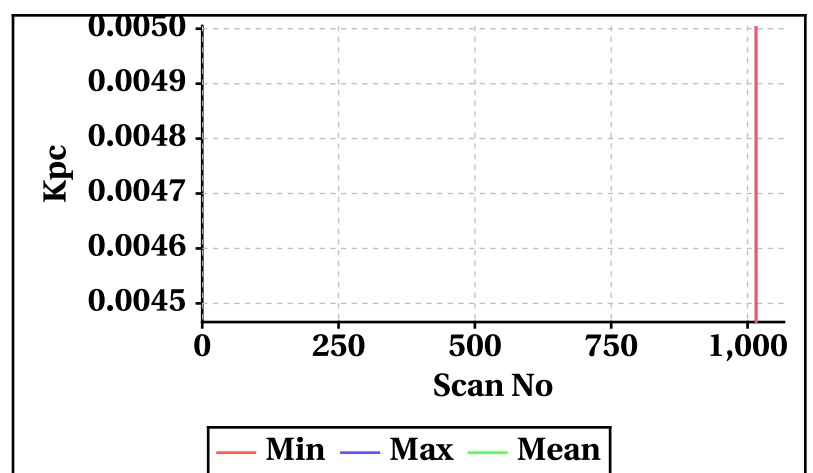


Orbt-wise behaviour of Incidence,Azimuth,Range,X-Factor


Inner Beam (HH)

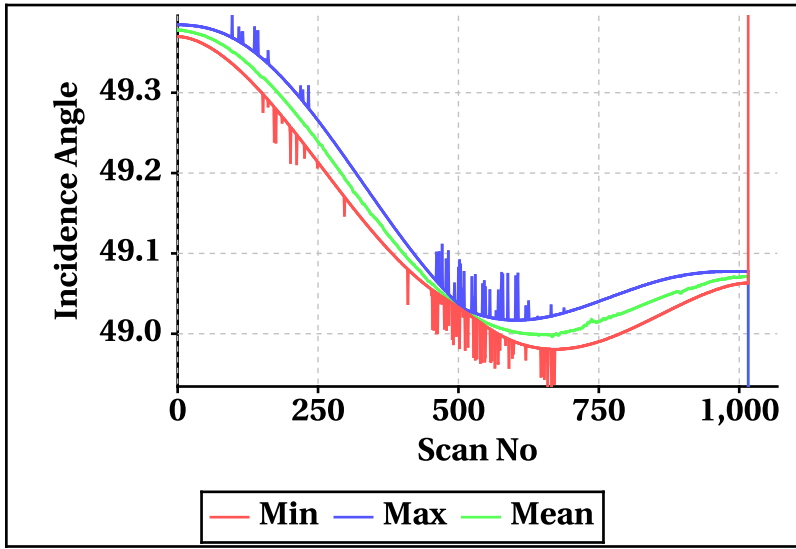


Outer Beam(VV)

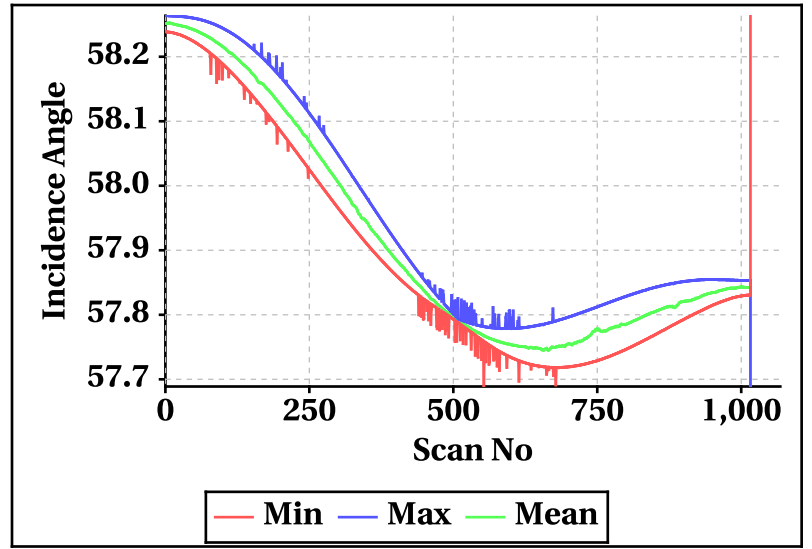


Inner Beam (HH)

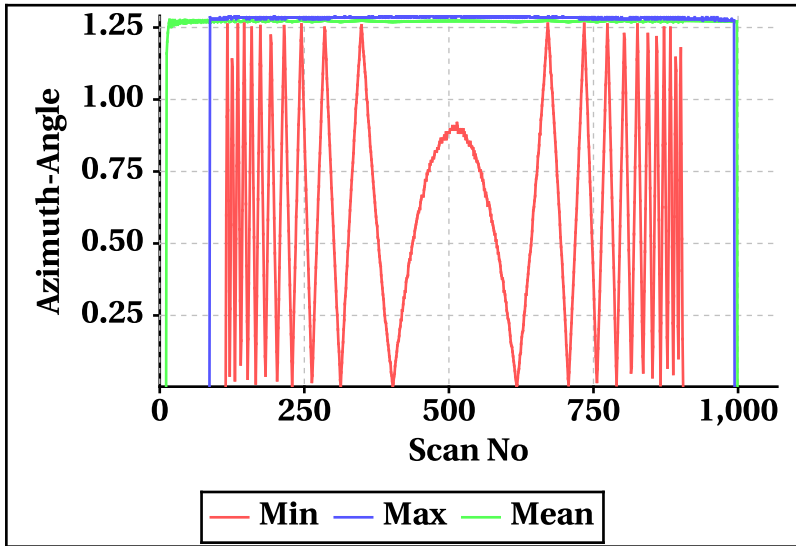


Outer Beam(VV)

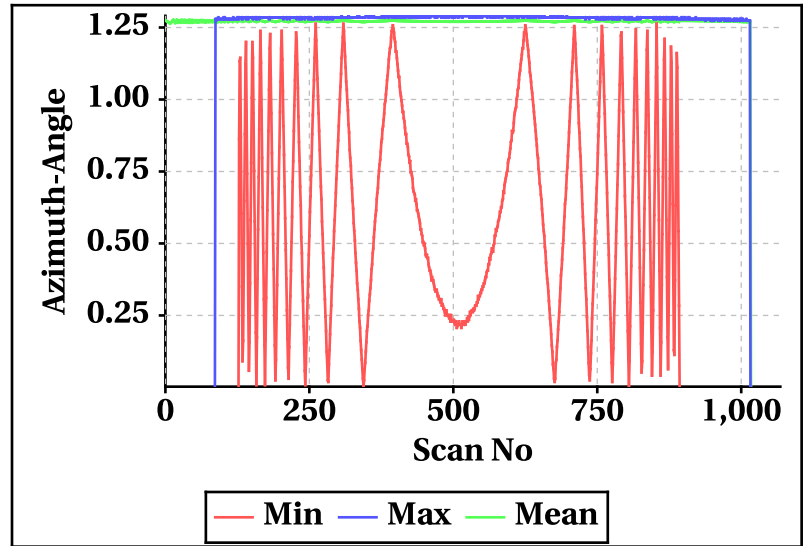


Inner Beam (HH)

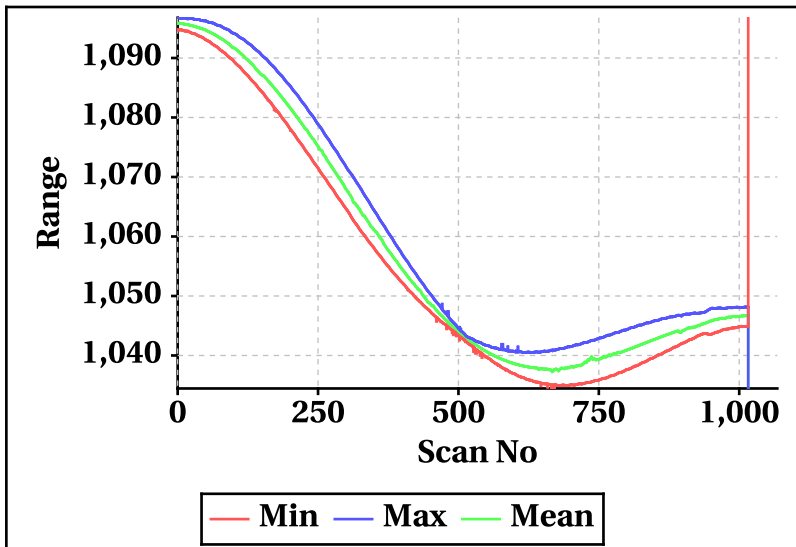


Outer Beam(VV)

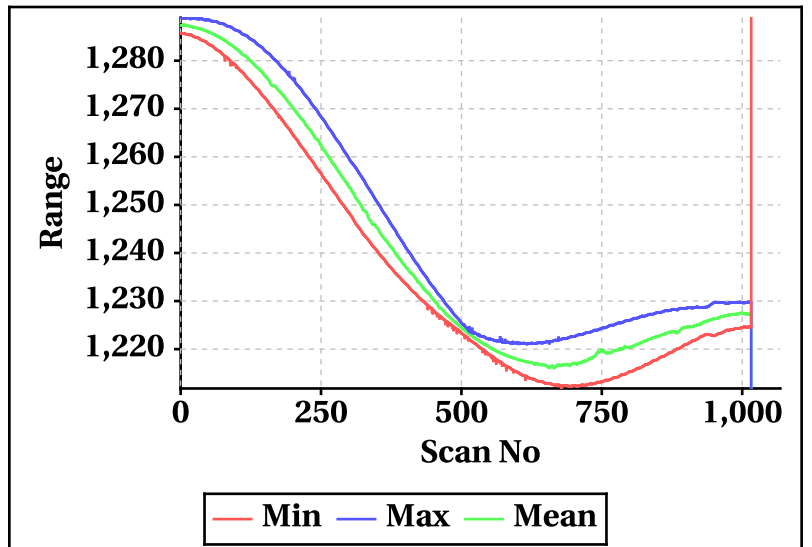

Inner Beam (HH)

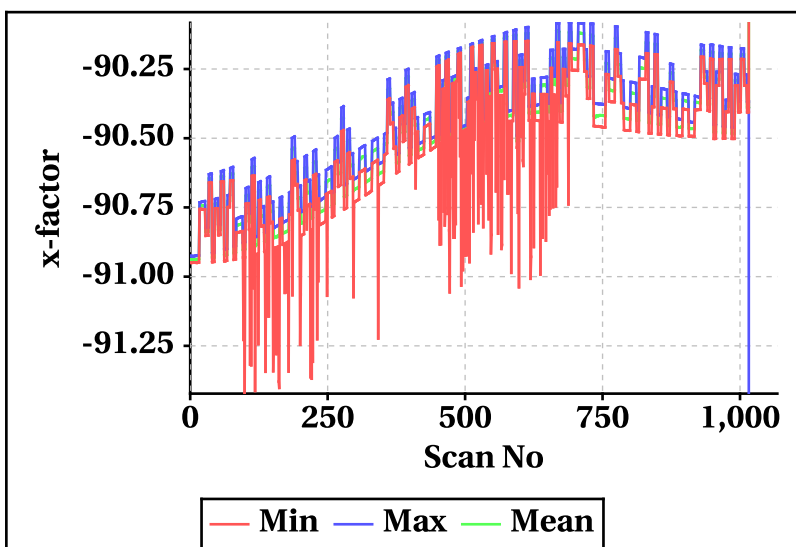

Outer Beam(VV)

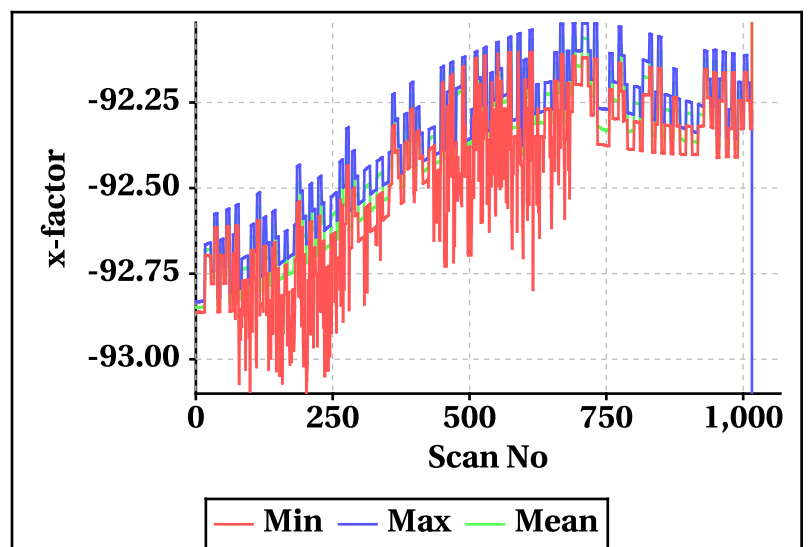




# Doppler Frequency Variation

**Doppler Frequency(KHz) variation statistics Over the half Orbit**

	Inner Beam (HH)	Outer Beam (VV)
<b>Min</b>	-469.94	-526.02
<b>Max</b>	472.28	528.10


**Footprint wise Doppler frequency variation Inner Beam (HH)**

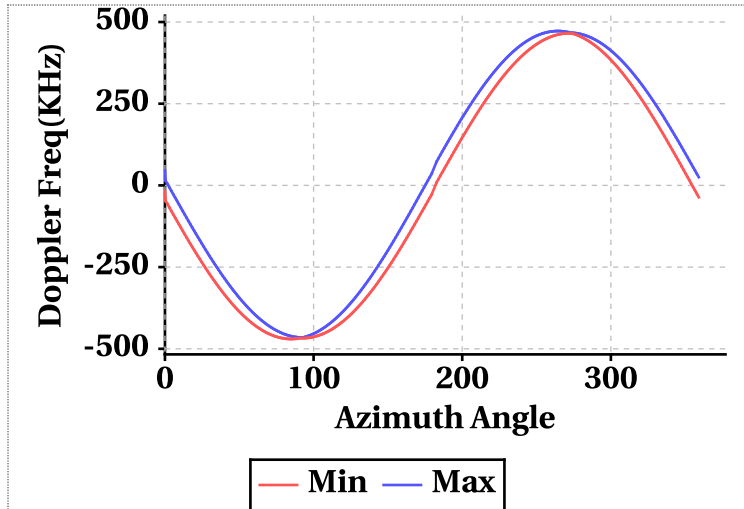


**Doppler Frequency(KHz) variation**

Doppler_FP	Inner Beam (HH)			Outer Beam (VV)		
	Min	Max	Mean	Min	Max	Mean
Doppler_1	-188.64	72.76	49.44	-205.08	75.98	50.03
Doppler_70	-188.64	469.32	467.32	-205.08	525.32	523.01
Doppler_140	-188.64	14.64	-24.63	-205.08	9.88	-34.21
Doppler_210	-468.20	-188.64	-467.00	-523.52	-205.08	-522.34
Doppler_280	-188.64	46.14	22.58	-205.08	57.86	31.59


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Inner Beam (HH)**

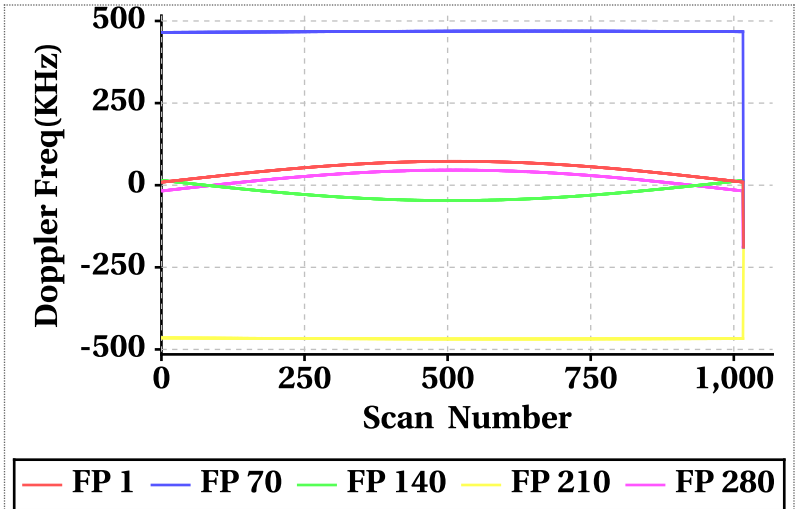

**Footprint wise Doppler frequency variation Outer Beam (VV)**

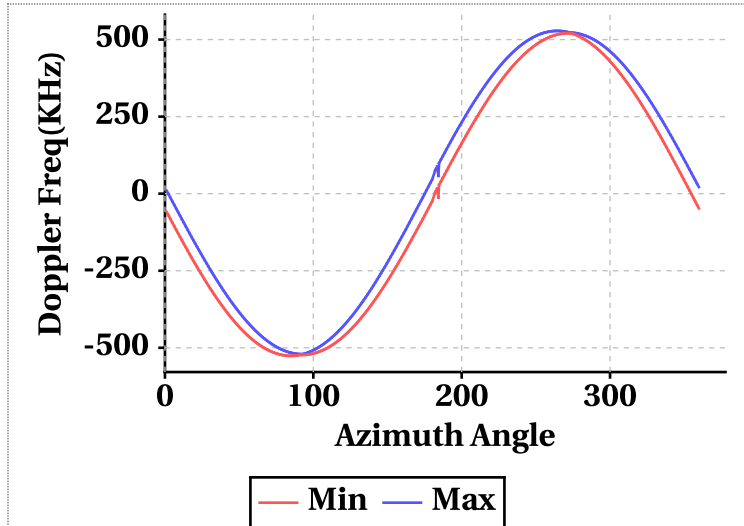


**Doppler frequency variation at footprints: 1, 70, 140, 210 & 280 Outer Beam (VV)**

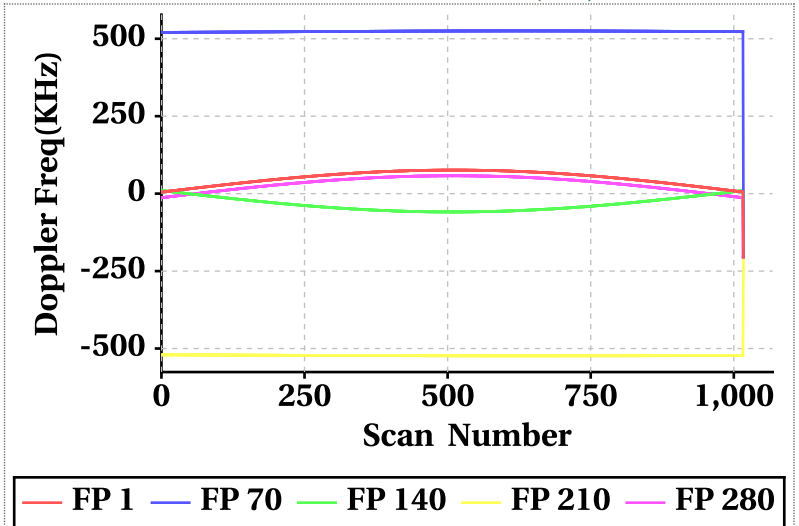


# Latitude Vs Doppler Frequency

**Doppler Frequency at Scan Interval of 200 [Inner Beam(HH)]**

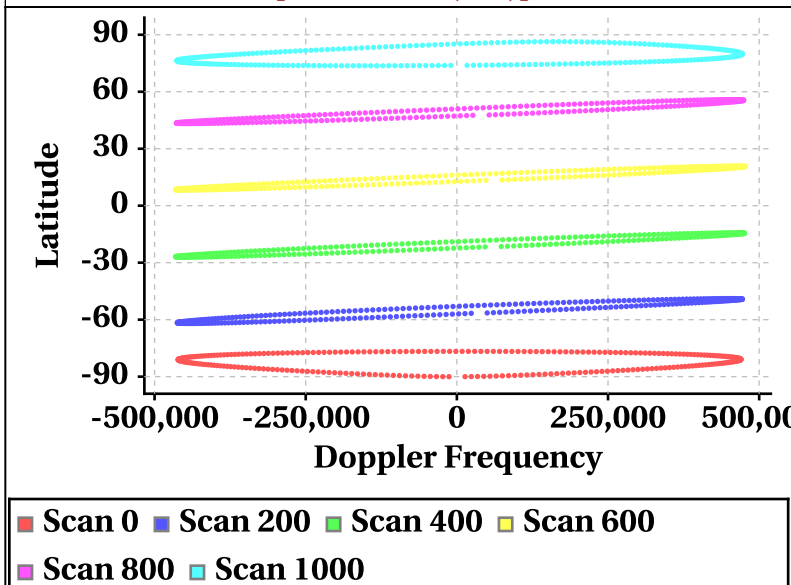


**Doppler Frequency at Scan Interval of 200 [Outer Beam(VV)]**

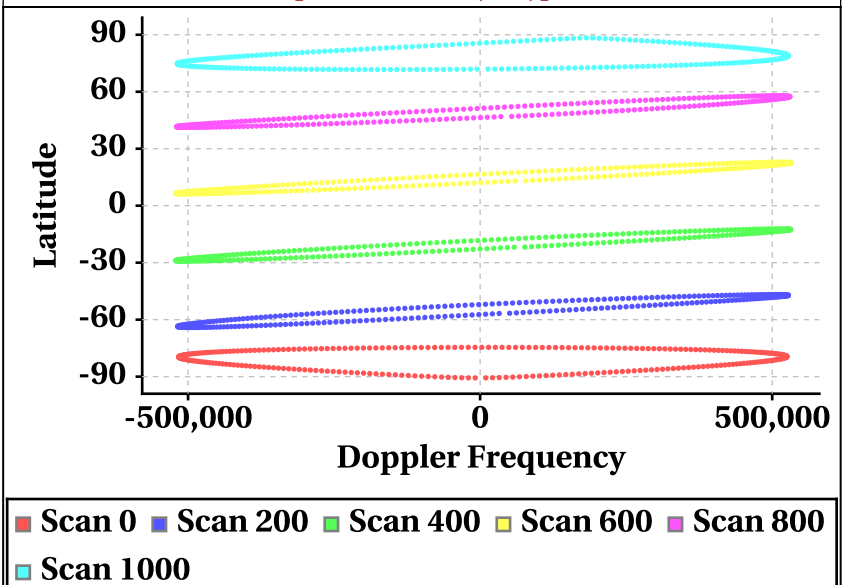

# Parameter as a function of Latitude


## Latitude Vs Longitude

Scan Trace [Inner Beam(HH)]

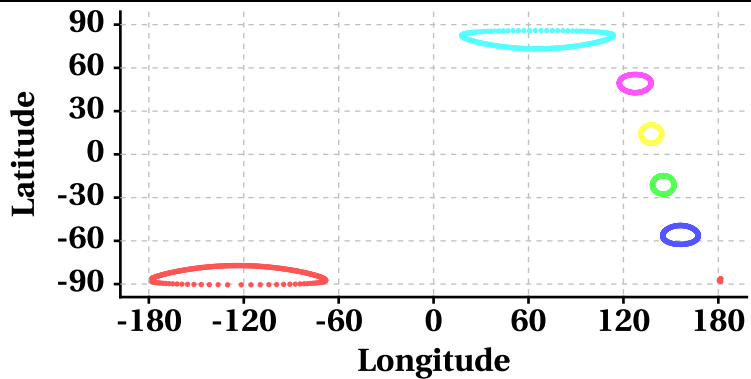

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600  
■ Scan 800 ■ Scan 1000


Scan Trace [Outer Beam (VV)]

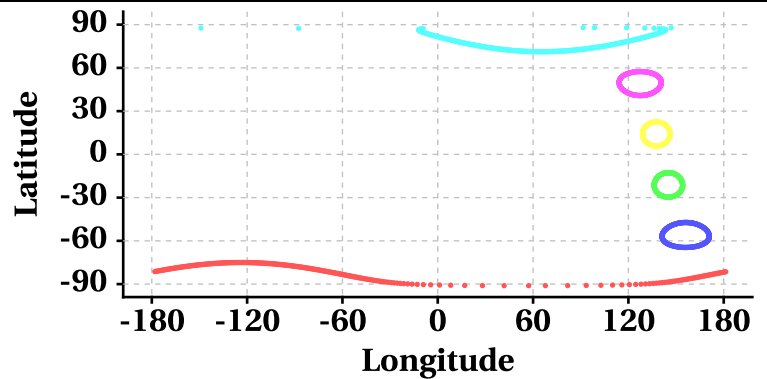

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600  
■ Scan 800 ■ Scan 1000


## Latitude Vs Incidence Angle

Incidence Angle at Scan Interval of 200 [Inner Beam(HH)]

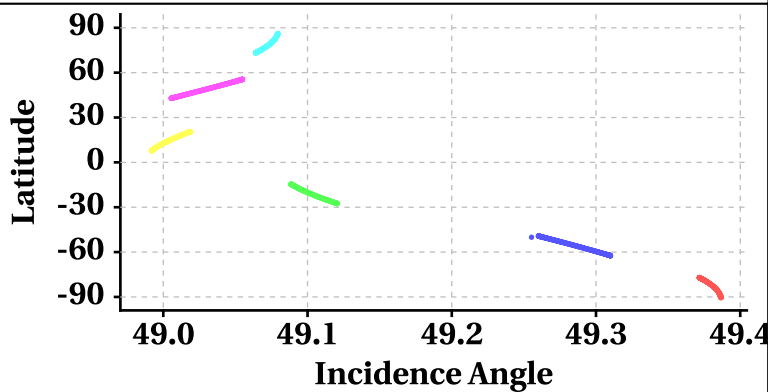

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600  
■ Scan 800 ■ Scan 1000


Incidence Angle at Scan Interval of 200 [Outer Beam (VV)]

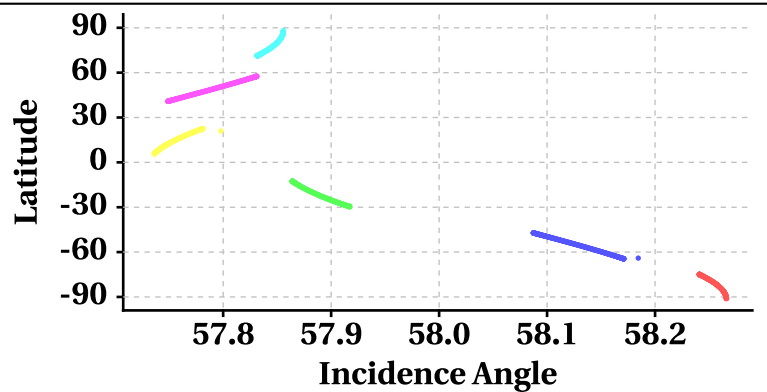

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600  
■ Scan 800 ■ Scan 1000


## Latitude Vs Range

Range at Scan Interval of 200 [Inner Beam(HH)]

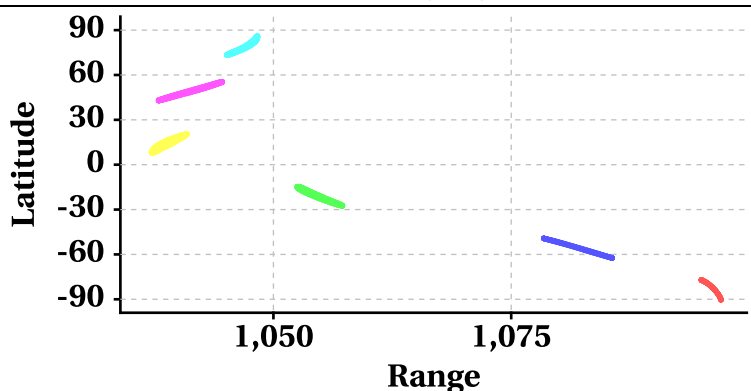

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600  
■ Scan 800 ■ Scan 1000

Range at Scan Interval of 200 [Outer Beam(VV)]

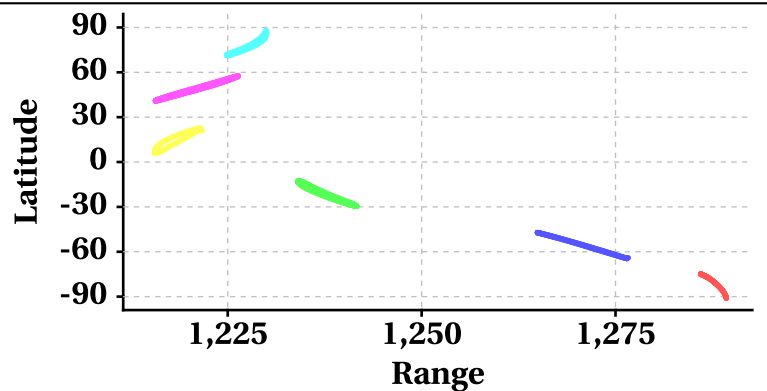

■ Scan 0 ■ Scan 200 ■ Scan 400 ■ Scan 600  
■ Scan 800 ■ Scan 1000



# Variation in Orbit and Attitude Parameters

