


# Scatsat-1 Scatterometer Level-2A Data Quality Evaluation Report


| Satellite      | Sensor          | Start Orbit       | End Orbit       |
|----------------|-----------------|-------------------|-----------------|
| SCATSAT-1      | Scatterometer   | 14541             | 14542           |
| WV Cells Along | WV Cells Across | EquatorCrossDate  | Production Date |
| 812            | 72              | 26-06-2019        | 26-06-2019      |
| Direction      | WVC Size(km)    | Processor Version |                 |
| NS             | 25              | v1.1.3            |                 |

## Brightness Temperature

Inner Beam (HH)

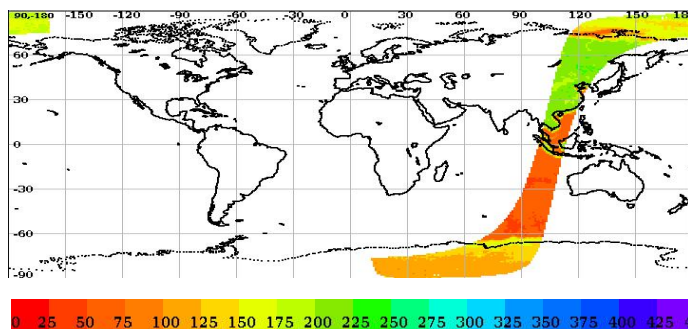


Outer Beam (VV)

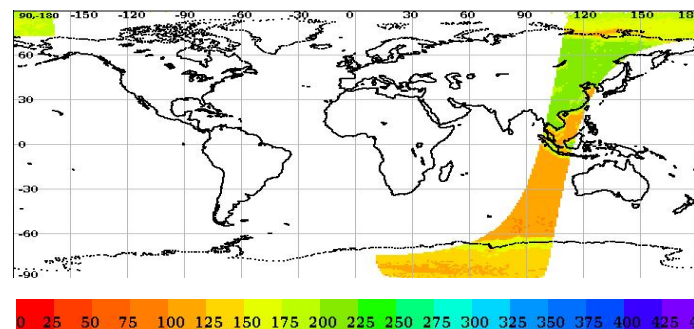


## Sigma0(dB)

Inner Beam (HH)

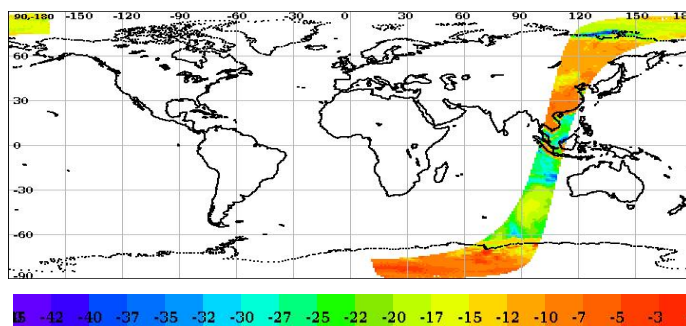

Outer Beam (VV)

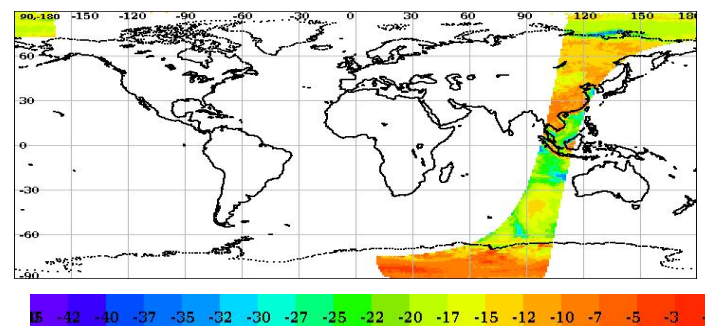

## Level-2A Cell-wise Deviations\*

| Static Parameter Statistics (variations over the cell grid) for the Inner and Outer Beam |                 |         |              |         |         |              |                 |         |              |         |         |              |
|------------------------------------------------------------------------------------------|-----------------|---------|--------------|---------|---------|--------------|-----------------|---------|--------------|---------|---------|--------------|
| Parameter                                                                                | Inner Beam (HH) |         |              |         |         |              | Outer Beam (VV) |         |              |         |         |              |
|                                                                                          | Aft             |         |              | Fore    |         |              | Aft             |         |              | Fore    |         |              |
|                                                                                          | Min Rng         | Max Rng | Bad Occ. (%) | Min Rng | Max Rng | Bad Occ. (%) | Min Rng         | Max Rng | Bad Occ. (%) | Min Rng | Max Rng | Bad Occ. (%) |
| Kpa                                                                                      | 0.00            | 0.07    | 0.00         | 0.00    | 0.07    | 0.00         | 0.00            | 0.07    | 0.00         | 0.00    | 0.07    | 0.00         |
| Kpb                                                                                      | 0.00            | 0.09    | 0.00         | 0.00    | 0.09    | 0.00         | 0.00            | 0.09    | 0.00         | 0.00    | 0.09    | 0.00         |
| Kpc                                                                                      | 0.00            | 0.00    | 0.00         | 0.00    | 0.00    | 0.00         | 0.00            | 0.00    | 0.00         | 0.00    | 0.00    | 0.00         |
| Inc. Angle(deg)                                                                          | 0.00            | 0.00    | 0.00         | 0.00    | 0.00    | 0.00         | 0.00            | 0.00    | 0.00         | 0.00    | 0.00    | 0.00         |
| Delta Azi.Angle(deg)                                                                     | 0.00            | 157.76  | 6.14         | 0.00    | 24.62   | 6.90         | 0.00            | 185.72  | 2.22         | 0.00    | 53.19   | 2.97         |

| Category wise Dynamic Parameter Statistics (Variations over the Cell grid) |            |         |         |              |          |         |              |          |         |              |           |         |              |
|----------------------------------------------------------------------------|------------|---------|---------|--------------|----------|---------|--------------|----------|---------|--------------|-----------|---------|--------------|
| Parameter                                                                  | Beam       | Sea Aft |         |              | Sea Fore |         |              | Land Aft |         |              | Land Fore |         |              |
|                                                                            |            | Min Rng | Max Rng | Bad Occ. (%) | Min Rng  | Max Rng | Bad Occ. (%) | Min Rng  | Max Rng | Bad Occ. (%) | Min Rng   | Max Rng | Bad Occ. (%) |
| SNR(dB)                                                                    | Inner (HH) | 0.00    | 45.78   | 1.46         | 0.00     | 41.33   | 1.74         | 0.00     | 35.65   | 0.01         | 0.00      | 31.81   | 0.04         |
|                                                                            | Outer (VV) | 0.00    | 37.28   | 1.17         | 0.00     | 39.23   | 1.93         | 0.00     | 29.92   | 0.07         | 0.00      | 35.06   | 0.06         |
| Sigma0(dB)                                                                 | Inner (HH) | 0.00    | 45.83   | 1.49         | 0.00     | 40.96   | 1.58         | 0.00     | 36.21   | 0.02         | 0.00      | 29.61   | 0.03         |
|                                                                            | Outer (VV) | 0.00    | 37.36   | 1.06         | 0.00     | 37.14   | 1.55         | 0.00     | 29.22   | 0.07         | 0.00      | 36.91   | 0.05         |

### Parameter Specifications with in a cell

|           |     |     |     |            |          |                  |             |
|-----------|-----|-----|-----|------------|----------|------------------|-------------|
| Parameter | Kpa | Kpb | Kpc | Inci (deg) | SNR (dB) | Delta Azi. (deg) | Sigma0 (dB) |
| Range     | 1.0 | 1.0 | 1.0 | 3.0        | 20.0     | 10.0             | 20.0        |

Normal
  Deviation
  Alarming
  High





\* Note: Deviations within a Cell for a category is observed and flagged if out of range specifications

Dynamic Range (Data Histograms)

Sigma0(db)

| Inner Beam (HH) |          |           |         |          |
|-----------------|----------|-----------|---------|----------|
|                 | Land Aft | Land Fore | Sea Aft | Sea Fore |
| Min             | -42      | -40       | -64     | -65      |
| Max             | 6        | 6         | -1      | -1       |

| Outer Beam (VV) |          |           |         |          |
|-----------------|----------|-----------|---------|----------|
|                 | Land Aft | Land Fore | Sea Aft | Sea Fore |
| Min             | -52      | -54       | -58     | -60      |
| Max             | 1        | 1         | -1      | -1       |

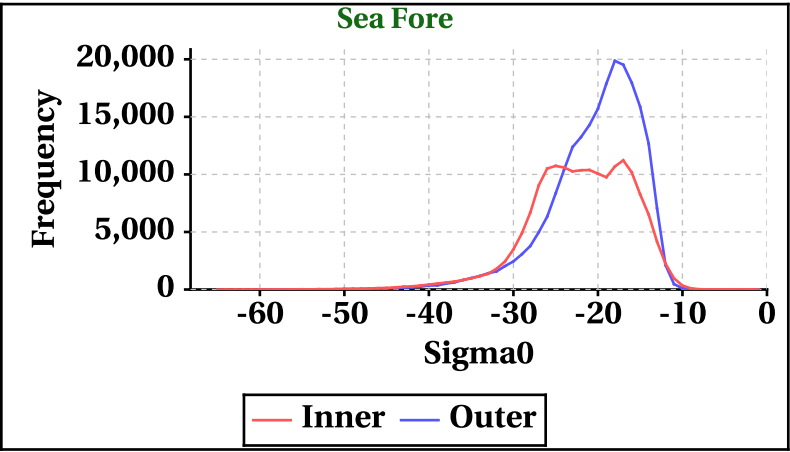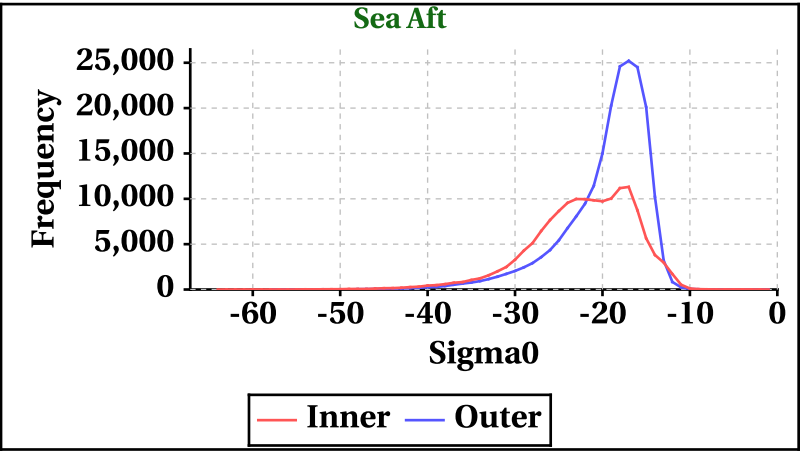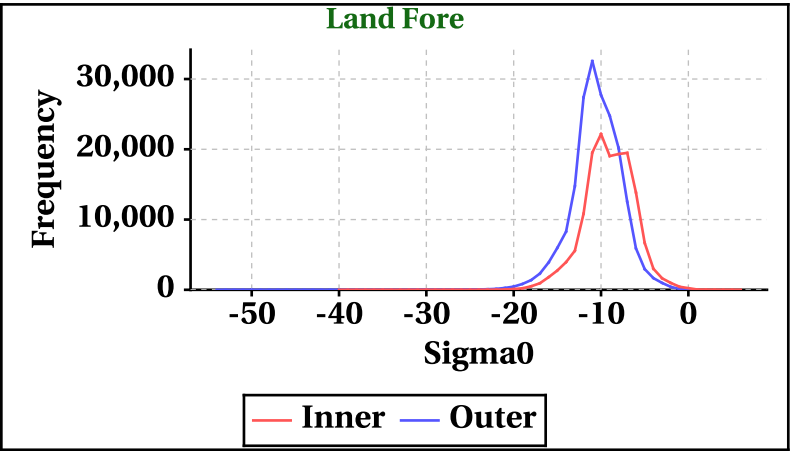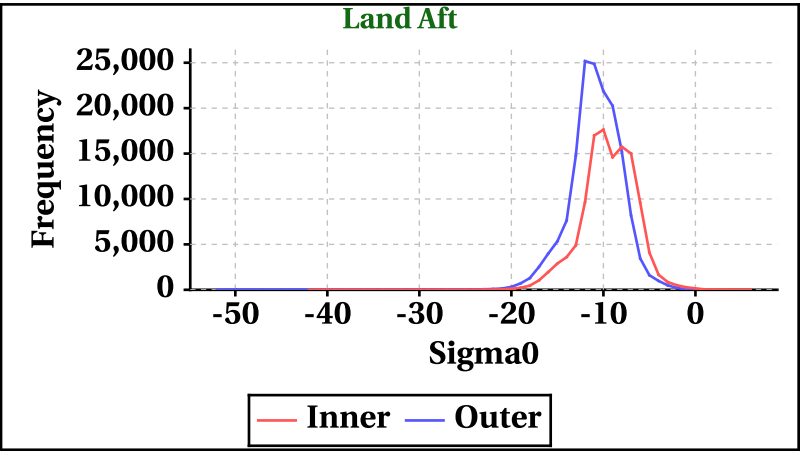

Brightness Temperature(K)

| Inner Beam(HH) |          |           |         |          |
|----------------|----------|-----------|---------|----------|
|                | Land Aft | Land Fore | Sea Aft | Sea Fore |
| Min            | 1        | 1         | 1       | 1        |
| Max            | 280      | 287       | 229     | 229      |

| Outer Beam(VV) |          |           |         |          |
|----------------|----------|-----------|---------|----------|
|                | Land Aft | Land Fore | Sea Aft | Sea Fore |
| Min            | 1        | 1         | 1       | 1        |
| Max            | 284      | 277       | 247     | 226      |

